

73 Amateur Radio

Issue #314
A WGE Publication

**Will my wife kill
me if I buy this?**

**Free Energy:
Is It For Real?**

p. 42

**BUYING
GUIDE**

**Sure Cure
For RFI**

p. 32

**Easy
C-64 RTTY**

p. 34

**Circuits
From
Garbage!**

p. 30

**Simple
Transistor
Biasing**

p. 40



Table of Contents

A Power Supply Primer: Part I

First part of the last word on those big heavy things. K4IPV 26

Born-Again Bargain Boards

Put surplus (cheap!) printed-circuit boards to work in your shack. Thompson 30

Defuse RFI

The answer to the question, "What's a coaxial ground?" W0WUZ 32

Commodore's RTTY Riot

Super-simple way to put your C-64 on RTTY. W8CHK, WB8YOB 34

Transistors On The Bias

The straight scoop on how to build a transistor amplifier, complete with a free Basic program. W6WTU 40

No Free Lunches

Step into the middle of a raging debate—can we get energy from nothing? W6HDM 42

Subaudible Snooping

Figure out what frequency everyone is using for subaudible access on their repeaters. Endorsed by the Radio Police. KE6VK 48

A Pedal-Pushing Power Plant

Work on your weight while you power your station. WA8WTE 50

73's Annual Holiday Shopping Guide. Staff 54

Reviews

Head-to-Head 220 bricks: Alinco's ELH-220GF versus

Mirage/KLM's C22 A. KT2B 20

Another brick for the wall: Dick Smith's 100-Watt VHF

amp. WB6PHE 22

Heath power: Heathkit's IP-2760 Battery Eliminator

.... KW1O 24

Departments

Above and Beyond	84	New Products	18
ATV	80	NK6K > Packet	74
Barter 'N' Buy	64	Propagation	102
Dealer Directory	102	QRP	70
Feedback	72	QRX	7
Fun!	68	QSL of the Month	10
Letters	17	RTTY Loop	78
List of Advertisers	73	73 International	90
Looking West	86	Special Events	60
Never Say Die	4	WEATHERSAT	66



PRESENTING The AH-2



ICOM AH-2 MOBILE ANTENNA SYSTEM

ICOM presents the AH-2 automatic antenna tuning system for its HF transceivers. The AH-2 is ideal for mobile operators since there is no manual antenna tuning needed...an advantage in inclement weather. Also, the AH-2 system enables auto tuning in areas where antennas are limited, such as apartments and condominiums.



The ICOM AH-2 System combines advanced matching techniques and rugged construction for indoor or outdoor use to match frequencies from 3.5MHz to 30MHz. The system includes an antenna element, and the AH-2a tuner and controller units.

The AH-2a Controller Unit easily attaches to the side of ICOM's HF transceivers. By simply pushing the TUNE button on the front panel of the AH-2a controller unit, the controller automatically tunes from 10 to 80 meters in less than six seconds. It can also be used on the 160 meter band with an extension of the stainless steel whip.

The AH-2a Tuner Unit enables optimum matching conditions via its built-in 8-bit microcomputer and LC (coil/capacitor) circuit. More than 260,000 LC combinations are possible.

The AH-2 System is compatible with the IC-735 HF transceiver. Plus, when used with the optional OPC-137 it is compatible with the IC-701, IC-740, IC-745, IC-751, and IC-751A.

The AH-2a Tuning Unit is housed in a durable weather-resistant case and is capable of storing tuning information for eight different frequencies. Retrieving tuning data from the memories is quickly accomplished in less than one second!

The AH-2a can be purchased separately to accommodate the ham who already has a bumper mount and whip antenna, or the apartment/condo dweller who wants to match a random wire.

The Antenna Element includes sturdy bumper mounts which hold the 107 inch stainless steel whip in place, plus all the necessary hardware.



 **ICOM**
First in Communications

ICOM America, Inc., 2380-116th Ave NE, Bellevue, WA 98004 Customer Service Hotline (206) 454-7619

3150 Premier Drive, Suite 126, Irving, TX 75063

ICOM CANADA, A Division of ICOM America, Inc., 3071 - #5 Road, Unit 9, Richmond, B.C. V6X 2T4 Canada

All stated specifications are approximate and subject to change without notice or obligation. All ICOM radios significantly exceed FCC regulations limiting spurious emissions. AH2886

WORLDWIDE DISTRIBUTION

JV
S-CUS
TLER-HY GAI
FSEN-LUNAR-ME
ALOMAR-ROHN-SHURE
TRISTO-TRI-EX-VAN
U.S. TOWERS-AER
TENNASPEC
NUT-B
YST



HAM RADIO OUTLET

LARGEST HAM OUTLET IN THE WORLD

✓20
NEW ATLANTA STORE!
EASY SERVICE FOR
OUR EASTERN CUSTOMERS

7 STORE BUYING POWER

ICOM IC-R71A



Superior Grade General
Coverage Receiver

SALE! CALL FOR PRICE

ICOM IC-28A/28H



2-METER MOBILES
IC-28A (25w) IC-28H (45w)

LOW PRICE!

ICOM IC-3200A

DUAL
BANDER

Covers
Both
2 Meters
& 70 cm



**LIMITED QUANTITY
AT OLD PRICES**

ICOM IC-1271A




1.2 GHz Transceiver:
The First Full-featured
1240-1300 MHz Transceiver
AT GREAT LOW, LOW PRICES

NOW! RAPID DELIVERIES
FROM OUR OUTLETS

**COAST
TO COAST**

To Our Customers

ICOM HAND-HELD VHF/UHF

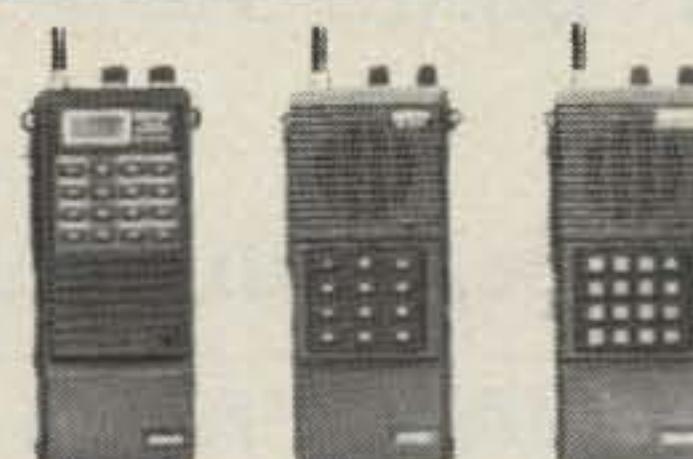

IC-02AT IC-2AT
IC-04AT IC-4AT IC-3AT

ICOM IC-735



The Latest in ICOM's Long
Line of HF Transceivers

CALL FOR LOW, LOW PRICE

ICOM IC-R7000



25 MHz-1300 MHz

**IN STOCK FOR
IMMEDIATE DELIVERY**

ICOM IC-751A



HF TRANSCEIVER
LOW PRICE!

VAN NUYS, CA 91401

6265 Sepulveda Blvd.
(818) 988-2212
Al, Mgr. K6YRA
San Diego Fwy.
at Victory Blvd.

STORE HOURS
10 AM-5:30 PM
CLOSED SUNDAYS

**FREE
SHIPMENT**
Most items UPS
surface



Bob Ferrero W6RJ
President
Jim Rafferty N6RJ
VP So. Calif Div.
Anaheim Mgr.

All Major Brands in Stock Now!

ANAHEIM, CA 92801
2620 W. La Palma
(714) 761-3033, (213) 860-2040
Between Disneyland &
Knott's Berry Farm

ATLANTA, GA 30340
6071 Buford Hwy.
(404) 263-0700
Neil, Mgr. KC4MJ
Doraville, 1 mi. north of I-285

BURLINGAME, CA 94010
999 Howard Ave.
(415) 342-5757
George, Mgr. WB6DSV
5 miles south on 101 from SFO

OAKLAND, CA 94606
2210 Livingston St.
(415) 534-5757
Joe, Mgr. K5OS
17N-5th Ave./17S-16th Ave.

PHOENIX, AZ 85015
1702 W. Camelback Rd.
(602) 242-3515
Bob, K7RDH
East of Hwy. 17

SAN DIEGO, CA 92123
5375 Kearny Villa Rd.
(619) 560-4900
Tom, Mgr. KM6K
Hwy. 163 & Claremont Mesa Blvd.

VAN NUYS, CA 91401
6265 Sepulveda Blvd.
(818) 988-2212
Al, Mgr. K6YRA
San Diego Fwy.
at Victory Blvd.

STORE HOURS
10 AM-5:30 PM
CLOSED SUNDAYS



Toll free including Hawaii. Phone Hrs: 7:00 am to 5:30 p.m. Pacific Time. California, Arizona and Georgia customers call or visit nearest store.
California, Arizona and Georgia residents please add sales tax. Prices, specifications, descriptions subject to change without notice.




MODEL 8000 DUPLEX

- Desk top or rack mounted versions
 - Pulse or fully regenerated tone dialing
 - Full and half duplex operation
 - Half duplex privacy mode
 - Internally squelched audio
 - Powerful toll call protection
 - Secret toll override code
 - * up # down or multi-digit access
 - Ringout
 - End to end signalling (DTMF standard)
 - Auto answer on 1st, 2nd, 4th or 8th incoming ring
 - Mobile to mobile signalling
 - Telephone initiated control mode
 - Dip switch selectable hybrid compensation capacitance.
 - Programmable timeout and mobile activity timers with unique beeps
 - Disconnect beep
 - Separate repeat level control
 - Lightning protection
 - Connectors for options
 - 10-16VDC powered
- 28 dip switches make all features user programmable and selectable.

OPTIONS

- 8001 ANI code validator (up to 1024 access codes)
- 8002 1000 call two tone signalling
- 8003 32 call CTCSS signalling
- 8004 FCC registered coupler
- 8005 Centralized computer billing system

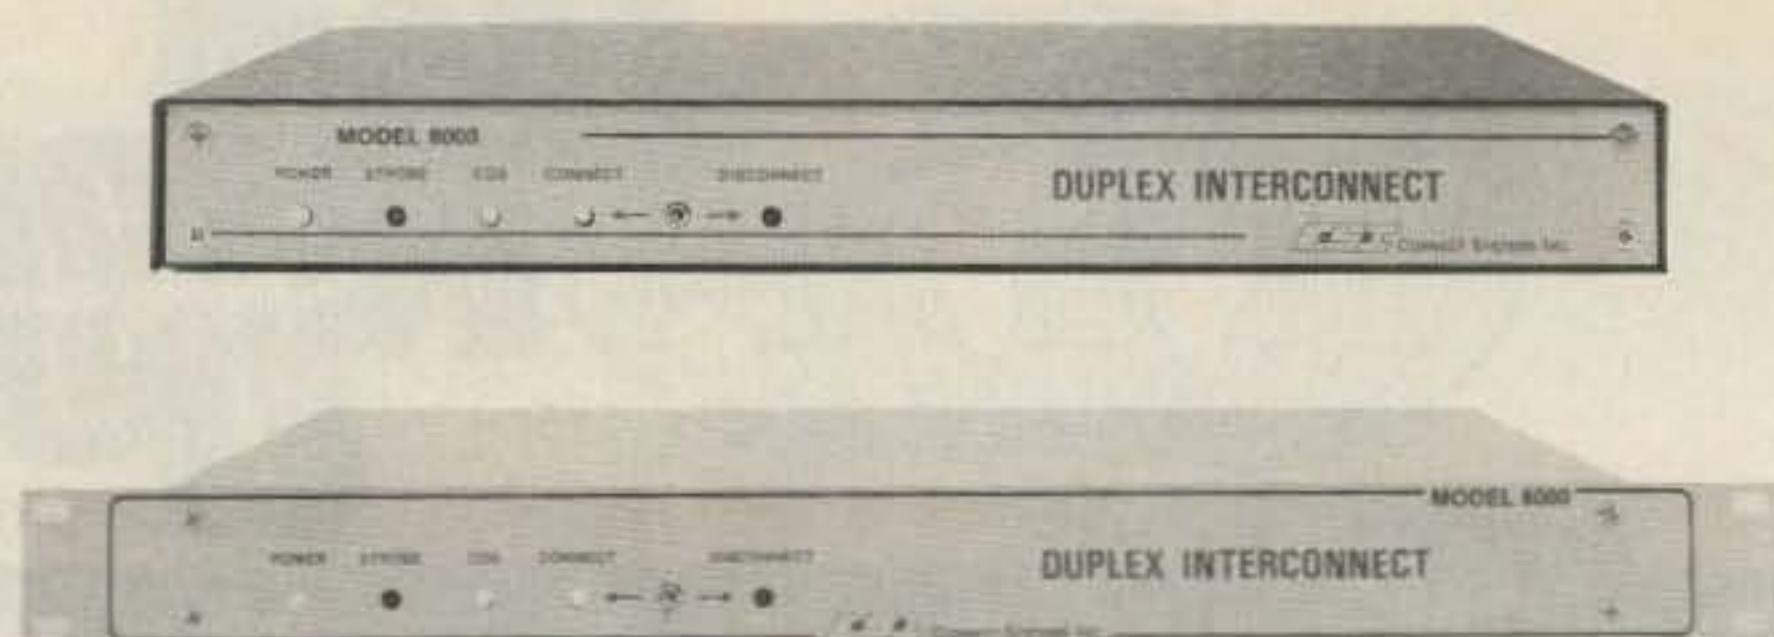

NOW ANYONE CAN ENJOY FULL DUPLEX!

Merely connect a CSI Model 8000 to any duplex base (such as the Yaesu FT-2700RH) and presto... you have an instant full duplex mobile telephone system!

Or, the 8000 can be connected to any repeater for shared use. A landline caller can selectively call any mobile on the system with (end to end) regenerated DTMF (standard), CTCSS (optional) or two tone sequential (optional). Mobiles can even selectively call each other!

Knowing the correct code, a caller can take control of the 8000 from any touch phone and voice communicate with mobiles that are not equipped with touch dialers.

No other duplex patch offers so much for so little.

FIRST CLASS FEATURES and PERFORMANCE ... COACH FARE!

MAKE YOUR MOBILE TELEPHONE SYSTEM FLY WITH A PATCH FROM CSI

PRIVATE PATCH III




A high performance VOX based patch for simplex systems and for operation through remotely located repeaters.

Thousands of Private Patch III's are in both amateur and commercial use worldwide. Private Patch III enjoys a reputation that is second to none.

CW ID and other powerful features make Private Patch III the best deal going in Vox Simplex phone patches!

MODEL CS-9500

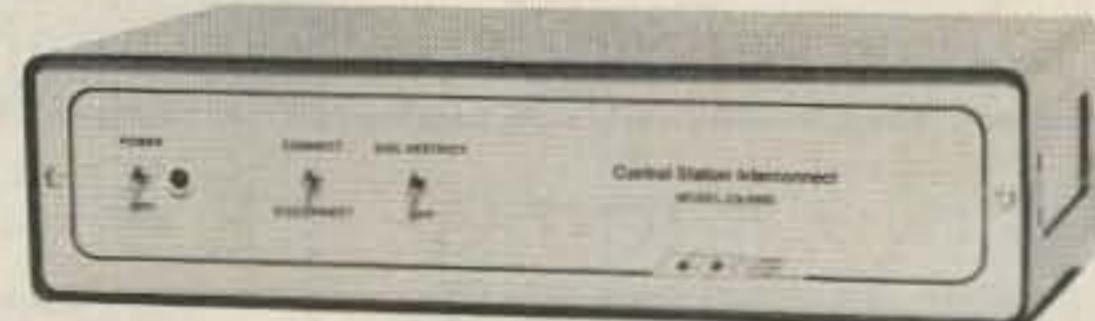

For exemplary simplex performance, the CS-9500 control station interconnect incorporates a full 1/2 second of landline to mobile electronic voice delay. Voice delay assures compatibility with the slowest CTCSS or trunked repeater systems.

Attractively styled to complement any decor.

STANDARD FEATURES (Both models)

- Three simple connections to base radio
- Simplex operation (VOX, of course)
- Digital "fast VOX"
- Toll restrict
- Secret toll disable code
- Selectable tone or pulse dialing
- Automatic busy signal disconnect
- Control interrupt timer (maintains positive control in simplex mode)
- Three digit access code (eg. * 73)
- Ringout (reverse patch)
- Ringout inhibit if channel is in use

- Lightning protectors
- Spare relay position
- 110VAC supply
- And much more

OPTIONS: 12 VDC or 230 VAC power
FCC registered coupler



CONNECT SYSTEMS INC.
23731 Madison St.
Torrance CA 90505
Phone: (213) 373-6803

AMATEUR ELECTRONIC SUPPLY
Milwaukee WI, Wickliffe OH,
Orlando FL, Clearwater FL,
Las Vegas NV
BARRY ELECTRONICS CORP.
New York, NY
EGE, INC.
Woodbridge, VA
ERICKSON COMMUNICATIONS
Chicago IL
HAM RADIO OUTLET
Anaheim CA, Burlingame CA,
Oakland CA, Phoenix AZ,
San Diego CA, Van Nuys CA

HENRY RADIO
Los Angeles CA
INTERNATIONAL RADIO SYSTEMS
Miami, FL
JUNS ELECTRONICS
Culver City CA
MADISON ELECTRONICS SUPPLY
Houston, TX
MIAMI RADIO CENTER CORP.
Miami FL
MIKES ELECTRONICS
P. Lauderdale, Miami FL

N&G DISTRIBUTING CORP.
Miami FL
PACE ENGINEERING
Tucson AZ
THE HAM STATION
Evansville IN
WESTCOM
San Marcos, CA
CANADA: CARTEL ELECTRONIC DISTRIBUTORS
Surrey B.C.
SKYWAVE RADIO SYSTEMS, LTD.
Burnaby, B.C.

ANNOUNCING

For Orders & Quotes
CALL TOLL FREE

1-800-423-2604

(U.S. and Hawaii)

Mon.-Fri. 9:00-7:00 Central Time
Sat. 9:00-1:00 Central Time




**Friendly Service
Texas Style!**

Texas Residents Call
(512) 454-2994



ICOM

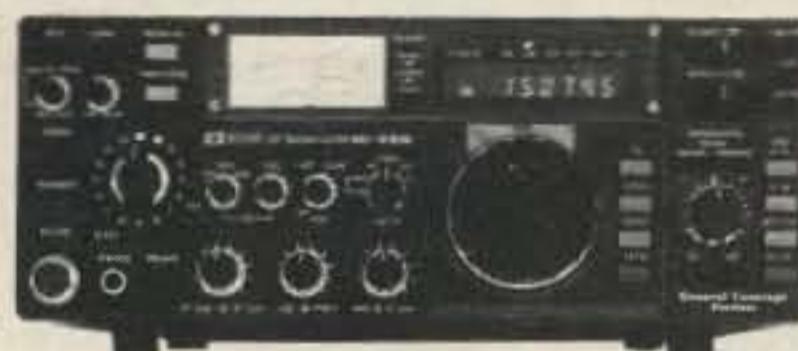

IC-745



ICOM



IC-R7000



ICOM



IC-28A
IC-28H



IC-3200A

IC-02AT
IC-04AT
IC-2AT
IC-3AT
IC-4AT



IC-751A



IC-735



IC-R71A

AEA
ALINCO
ALPHA-DELTA
AMECO PUBLICATIONS
AMPHENOL CONNECTORS
ARRL PUBLICATIONS
ASTRON POWER SUPPLIES

B&W
BENCHER
BUTTERNUT
CALEBOOK
COAX
CUSHCRAFT ANTENNAS
DAIWA

HUSTLER ANTENNAS
ICOM
KDK
KENPRO
KENWOOD
LARSEN ANTENNAS
MFJ

MIRAGE
NYSTUNERS & KEYS
SANTEC
SPIRO ANTENNAS
TOKYO HY-POWER
WELZ

KENWOOD

KENWOOD

KENWOOD



TR-2600A
TR-3600A



TR-751A



TM-2530A
TM-2550A
TM-3530A


TH-21AT
TH-31AT
TH-41AT



TS-940S




R-2000

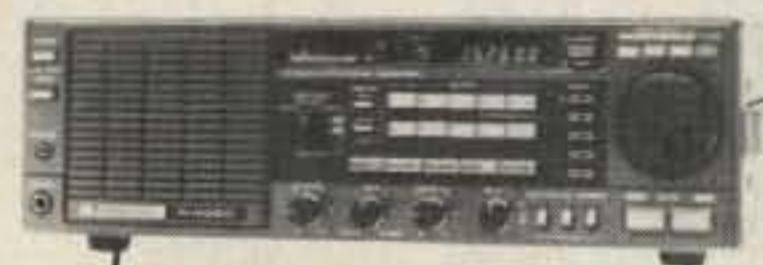

TS-440S



Austin Amateur Radio Supply • 5325 N. IH 35 • Austin, Texas 78723 • 512/454-2994



NEVER SAY DIE

Number 20 on your Feedback card

The following, which is in extraordinarily bad taste, should not be read by Extra-class hams—or anyone planning to be an Extra.

KILLER EXTRAS

When the word got out that the Oklahoma mass murderer was an Extra-class ham, someone mentioned that the Atlanta mass murderer had also been an Extra. Hmm.

Well, I don't think there's ever been any question about hams being crazy—it's just that we've never really figured out whether we become hams because we're crazy or amateur radio makes us crazy. Chicken or egg? We need some serious research, eh? I'll put my money on Morse code as the unbalancing factor. All those dits and dahs could easily flip one out.

Hey, don't get mad at me for

breaking the bad news that you're crazy. Crazy is just like alcoholism, smoking, and other insanities—the absolute last one to recognize there's a problem is the crazy. Look, if you think I'm exaggerating just ask any non-ham friend whom you really trust and see if he or she doesn't agree with me that you're crazy.

How else can you explain someone sitting for a lifetime trying to collect QSLs from 325 countries? There's no way to explain that as sane. And how about those of us who talk ourselves hoarse for 33 hours on a weekend trying for a dumb contest certificate? Let's see you come up with a rational explanation for ham contests. Can you explain traffic handling with a straight face? And the loonies bouncing signals off the moon?

Hams get mad when I point out



that the CBers who've been arrested and put in prison for using bad language over the air over long periods of time have all been Extra-class hams. How sure are you that it isn't the 20 words-per-minute code test which does it? How else can you explain all of the really outstandingly crazy hams being Extra class? Hey, I'm sure glad I didn't get my Extra! If I'd gotten it I'll bet I'd be out there getting even with some of the people who've done me in the most in life—instead of waiting until the next life to come back and haunt the hell out of them. I intend to come back with a vengeance—none of this wimpy forgive and forget, no sir.

And those who've gone out of their way to screw me and have had the bad grace to die—I'll get those bastards when I get there. Watch out Jim Fisk. Watch out Clay Pool. Watch out Budlong. And watch out you who have swiped my more treasured possessions. Watch out all you who have it coming—and you know who you are.

Hey, what with time being different in the next world, I may even be able to get started on readers who have let their 73 subscriptions lapse—ARRL directors who have bad-mouthed me in their talks—advertisers who haven't supported 73. I'll be real busy, but it'll be fun.

A recent *W5YI Report* went on at length with interviews of good ham buddies of N5PS—all telling what a great chap he was. Some of you must know someone good at seances, so how about getting a QSO with Pat and see what he's got to say about the mess he made. Let's hear from N5PS direct and see what he's got to say about this Peeping Tom stuff in the magazines. Hey, I've peeped a couple



"Sorry to hear about your line noise! We're rerouting our power lines seven miles to the west!"

QRM

Editorial Offices

WGE Center
Peterborough NH 03458-1194
phone: 603-525-4201

Advertising Offices

WGE Center
Peterborough NH 03458-1194
phone: 800-225-5083

Circulation Offices

WGE Center
Peterborough NH 03458-1194
phone: 603-525-4201

Manuscripts

Contributions in the form of manuscripts with drawings and/or photographs are welcome and will be considered for possible publication. We can assume no responsibility for loss or damage to any material. Please enclose a stamped, self-addressed envelope with each submission. Payment for the use of any unsolicited material will be made upon acceptance. All contributions should be directed to the 73 editorial offices. "How to Write for 73" guidelines are available upon request. US citizens must include their social security number with submitted manuscripts.

Subscription Information

Rates: in the United States and Possessions: One Year (12 issues) \$24.97; Two Years (24 issues) \$45.47. Elsewhere: Canada and Mexico—\$39.00/1 year only, US funds. Foreign surface mail—\$45.00/1 year only, US funds drawn on US bank. Foreign air mail—please inquire. To subscribe, renew or change an address: Write to Subscription Department, PO Box 931, Farmingdale NY 11737. Send Canadian changes of address to: 73, PO Box 1051, Fort Erie, Ontario CANADA L2A 5N8. Return postage guaranteed. For renewals and changes of address, include the address label from your most recent issue of 73. For gift subscriptions, include your name and address as well as those of gift recipients. For questions concerning your subscription and to place subscription orders, please call us toll free at 1-800-645-9559 between 9 am and 5 pm or write to 73, Subscription Department, PO Box 931, Farmingdale NY 11737. *73 Amateur Radio* (ISSN 0745-080X) is published monthly by WGE Publishing, WGE Center, Peterborough NH 03458-1194. Second class postage paid at Peterborough NH 03458 and at additional mailing offices. Canadian second class mail registration number 9566. Entire contents copyright © 1986, WGE Publishing. All rights reserved. No part of this publication may be reprinted or otherwise reproduced without written permission from the publisher. Microfilm Edition—University Microfilm, Ann Arbor MI 48106. Postmaster: Send address changes to *73 Amateur Radio*, Subscription Services, PO Box 931, Farmingdale NY 11737. Nationally distributed by International Circulation Distributors. Contract: The mere possession of this magazine is hereby deemed legal proof that (a) you've read this contract message and (b) that you are legally bound to observe the terms of this binding contract. Under Penalty of The LAW you have agreed to make at least one favorable mention during each and every radio contact for the next three months on the incredible improvement in 73. You have further agreed to enthusiastically urge every radio amateur you meet over the air, personally, via business, or in any other way you devise, to read and subscribe to 73. If they are ill-mannered enough to try and plead poverty, point out that they think nothing of blowing more than the cost of a subscription at the grocery—and what's the loss of a meal or two compared to the excitement of 73? You are expected to report regularly to The Publisher via the bind-in and blow-in cards.

Continued on page 10

KENWOOD

...pacesetter in Amateur radio

Here Now!
TM-3530A
220 MHz

Power-Full...70 Watts!

TM-2570A/2550A/2530A/3530A

Sophisticated FM transceivers

Kenwood sets the pace again!

The all-new "25-Series" brings the industry's **first compact 70-watt 2-meter FM mobile transceiver.** There is even an **auto dialer** which stores 15 telephone numbers! There are four versions to choose from: The TM-2570A 70-watt, TM-2550A 45-watt, TM-2530A 25-watt and the TM-3530A 220 MHz, 25-watt.

- **First** 70-watt FM mobile (TM-2570A)
- **First** mobile transceiver with telephone number memory and auto-dialer (up to 15 seven-digit phone numbers)
- Direct keyboard entry of frequency
- Automatic repeater offset selection—**a Kenwood exclusive!**
- Extended frequency coverage for MARS and CAP (142-149 MHz; 141-151 MHz modifiable)
- 23 channel memory for offset, frequency and sub-tone
- Big multi-color LCD and back-lit controls for excellent visibility

- Front panel programmable 38-tone CTCSS encoder **includes 97.4 Hz** (optional)
- 16-key DTMF pad, with audible monitor
- Center-stop tuning—**another Kenwood exclusive!**
- Frequency lock switch
- **New** 5-way adjustable mounting system
- **Unique** offset microphone connector—relieves stress on microphone cord

Large heatsink with built-in cooling fan (TM-2570A)




- High performance GaAs FET front end receiver
- HI/LOW Power switch (adjustable LOW power)
- TM-3530A covers 220-225 MHz
- Digital Channel Link (optional)



Introducing... Digital Channel Link

Compatible with Kenwood's DCS (Digital Code Squelch), the DCL system enables your rig to **automatically** QSY to an open channel. Now you can automatically switch over to a simplex channel after repeater contact! Here's how it works:

The DCL system searches for an open channel, remembers it, returns to the original frequency and transmits control information to another DCL-equipped station that switches **both** radios to the open channel. Microprocessor control assures fast and reliable operation. The whole process happens in an instant!

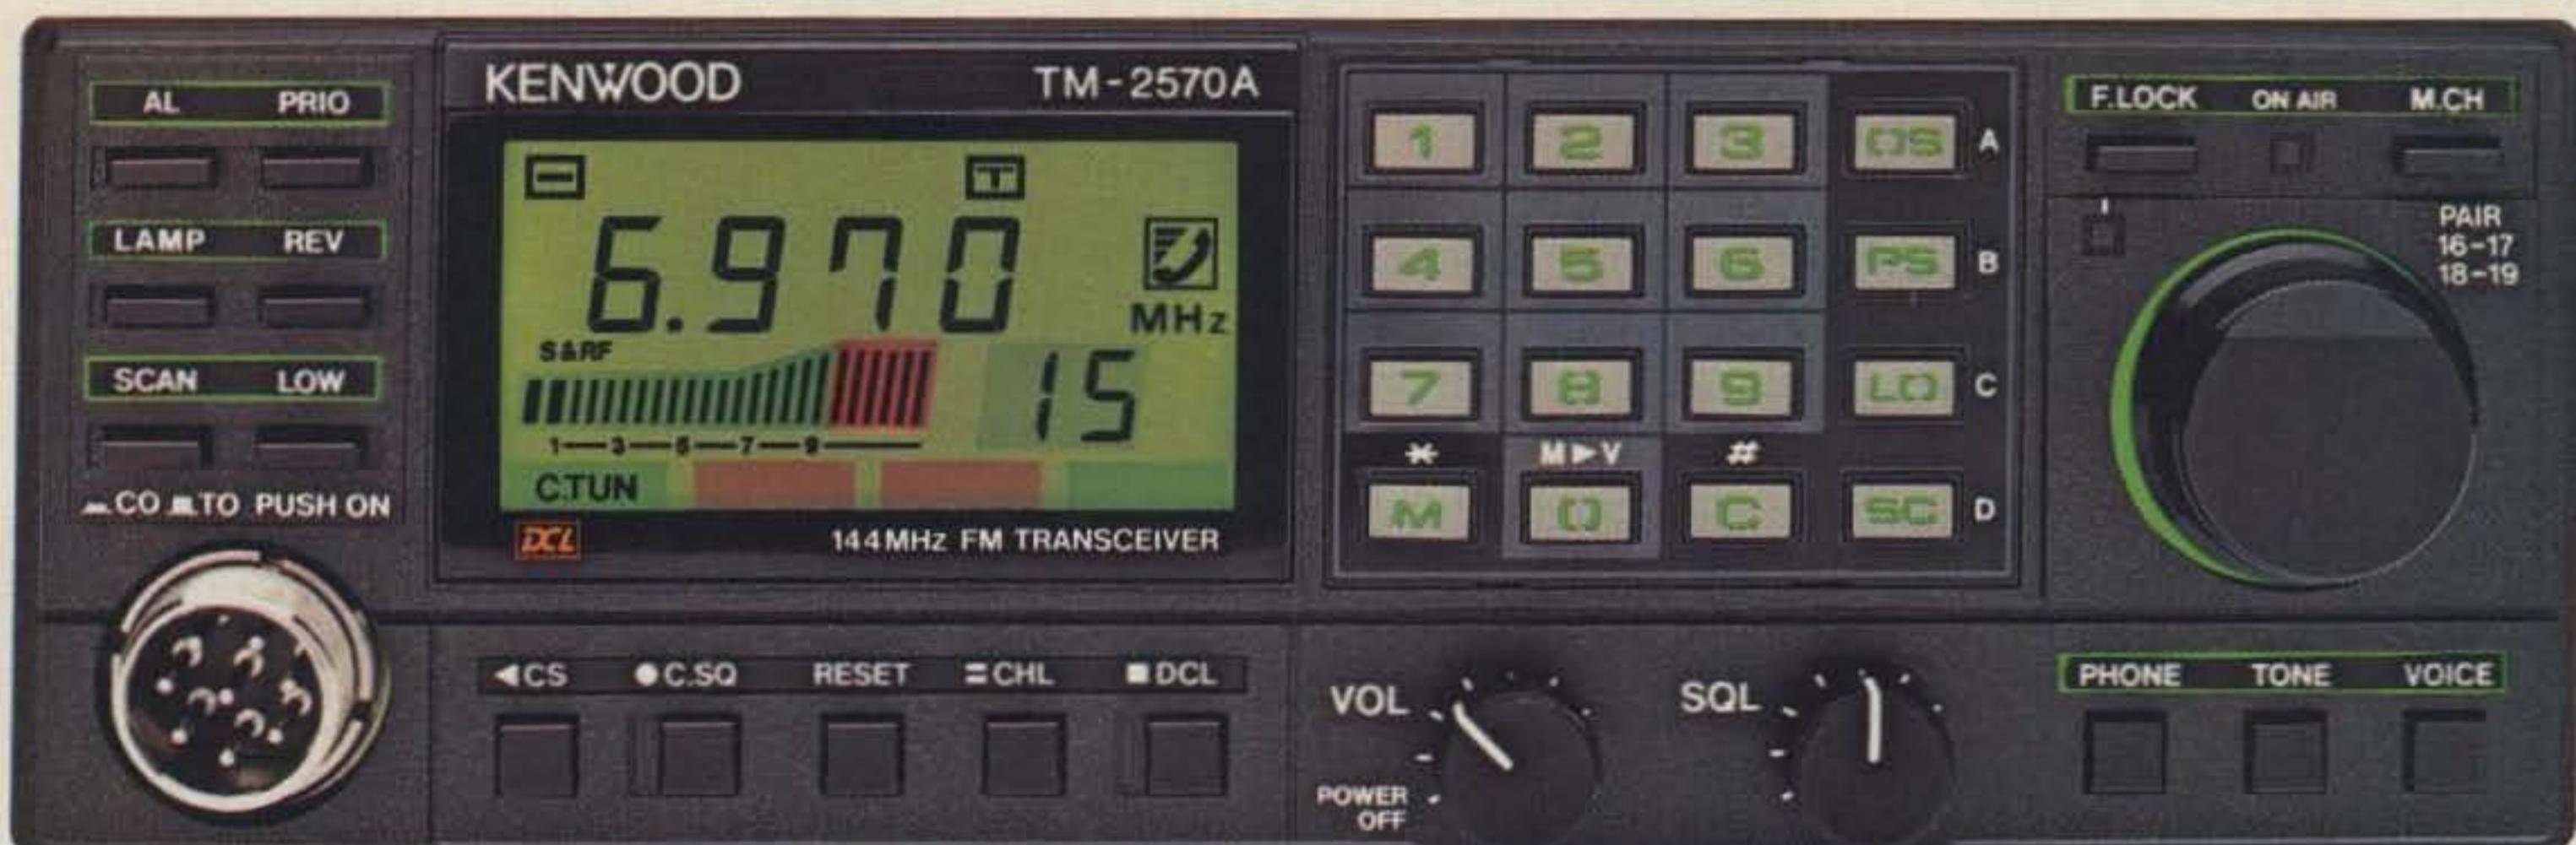

Optional Accessories

- TU-7 38-tone CTCSS encoder
- MU-1 DCL modem unit
- VS-1 voice synthesizer
- PG-2N extra DC cable
- PG-3B DC line noise filter
- MB-10 extra mobile bracket
- CD-10 call sign display
- PS-430 DC power supply for TM-2550A/2530A/3530A

- PS-50 DC power supply for TM-2570A
- MC-60A/MC-80/MC-85 desk mics.
- MC-48B extra DTMF mic. with UP/DWN switch
- MC-43S UP/DWN mic.
- MC-55 (8-pin) mobile mic. with time-out timer
- SP-40 compact mobile speaker
- SP-50B mobile speaker
- SW-200A/SW-200B SWR/power meters
- SW-100A/SW-100B compact SWR/power meters
- SWT-1 2m antenna tuner

Actual size front panel

KENWOOD

TRIO-KENWOOD COMMUNICATIONS
1111 West Walnut Street
Compton, California 90220

Complete service manuals are available for all Trio-Kenwood transceivers and most accessories.

Specifications and prices are subject to change without notice or obligation.

Specifications guaranteed on Amateur bands only.

KENWOOD

...pacesetter in Amateur radio

"Dual-Band" Leader!

TW-4000A

2-m/70-cm FM transceiver.

The first is still the best! The original FM "Dual Bander" TW-4000A delivers 25 watts output on both VHF and UHF in a single compact package.

- **2 m and 70 cm FM in a compact package.**

Covers the 2 m band (142.000-148.995 MHz), including certain MARS and CAP frequencies, plus the 70 cm FM band (440.000-449.995 MHz), all in a single compact package. Only 6-3/8 (161)W x 2-3/8 (60)H x 8-9/16 (217)D inches (mm), and 4.4 lbs. (2.0 kg.).

- **Single-function keys allow easy operation.**

- **Large, easy-to-read LCD display.**


A green, multi-function back-lighted LCD display for better visibility. Indicates frequency, memory channel, repeater offset, "S" or "RF" level, VFO A/B, scan, busy, and "ON AIR." Dimmer switch.

- **Front panel illumination.**

- **10 memories with offset recall and lithium battery backup.**

Stores frequency, band, and repeater offset. Memory 0 stores receive and

transmit frequencies independently for odd repeater offsets, or cross-band (2 m/70 cm) operation.

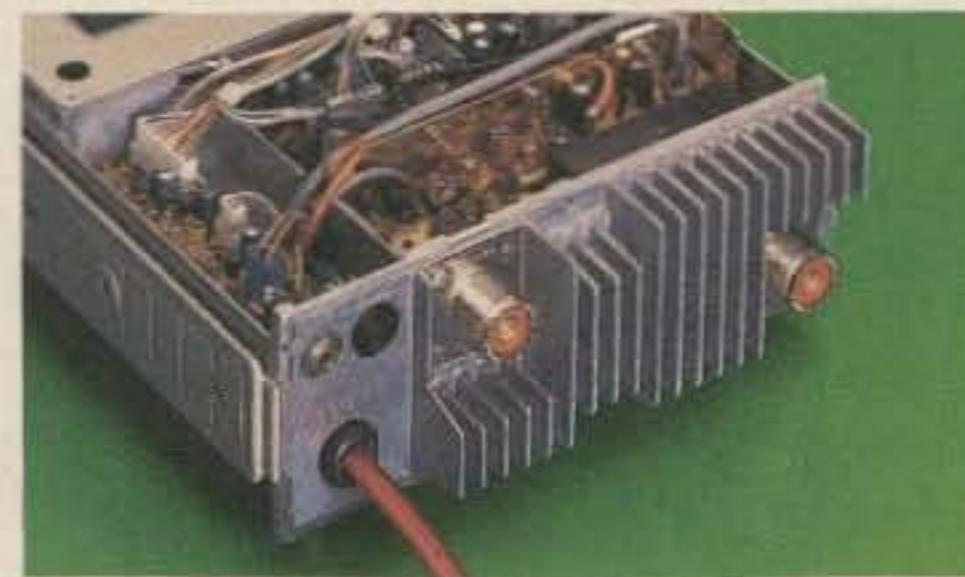

- **Rugged die-cast chassis.**

- **Two separate antenna ports.**

Use of separate antennas is recommended. This simplifies antenna matching and minimizes loss. However, mobile installations may require a single antenna. The optional MA-4000 dual band mobile antenna comes with an external duplexer.

- **Programmable memory scan with channel lock-out.**

Programmable to scan all memories, or only 2 m or 70 cm memories. Also may be programmed to skip channels.

- **Band scan in selected 1-MHz segments.**

Scans within the chosen 1-MHz segment (i.e., 144.000-144.995 or 440.000-440.995, etc.). The scanning direction

may be reversed by pressing either the "UP" or "DOWN" buttons on the microphone.

- **Priority watch function.**

Unit switches to memory 1 for 1 second every 10 seconds, to monitor the activity on the priority channel.

- **Common channel scan.**

Memories 8 and 9 are alternately scanned every 5 seconds. Either channel may be recalled instantly.

- **High performance receiver/transmitter.**

GaAs FET RF amplifiers on both 2 m and 70 cm, high performance monolithic crystal filters in the 1st IF section, provide high receive sensitivity and excellent dynamic range. The high reliability RF power modules assure clean and dependable transmissions on either band.

- **Optional "voice synthesizer unit."**

Installs inside the TW-4000A. Voice announces frequency, band, VFO A or B, repeater offset, and memory channel number.

- **Repeater reverse switch.**



More TW-4000A information is available from authorized Kenwood dealers.



Optional accessories:

- VS-1 voice synthesizer
- TU-4C two-frequency CTCSS tone encoder
- PS-430 DC power supply
- KPS-7A fixed station power supply
- MA-4000 dual band mobile antenna with duplexer
- SP-40 compact mobile speaker
- SP-50 mobile speaker
- MC-42 UP/DOWN microphone
- MC-55 8-pin mobile mic. with time-out timer
- SW-100B SWR/power meter
- SW-200B SWR/power meter
- SWT-1/SWT-2 2 m/70 cm antenna tuners
- PG-3A noise filter
- MB-4000 extra mounting bracket

Complete service manuals are available for all Trio-Kenwood transceivers and most accessories. Specifications and prices are subject to change without notice or obligation.

Antenna mag mount is not Kenwood supplied.

KENWOOD

TRIO-KENWOOD COMMUNICATIONS
1111 West Walnut Street
Compton, California 90220

Antennas Away

THIS FROM OUR "Talk About A Nice Guy" department: Ralph Jannini KA1FAA of Unadilla/Reyco dropped us a note describing his company's new antenna give-away program. To encourage established ham radio clubs to sponsor radio clubs in schools, Unadilla will give new school clubs a Unadilla 40/80m antenna kit. To qualify, just have your school principal and the president of the sponsoring radio club drop a note to Ralph describing what's going on. There is a catch—the offer is limited to only five new clubs per state per year. You can get in touch with Ralph at Unadilla/Reyco/Inline, PO Box 215BV, Andover MA 01810-0814.

Big Pitch

WE THOUGHT that Unadilla's idea was so good that we came up with our own little pitch. We'd like to see ham radio magazines in every school library in the country (note: that's ham-radio magazines, not *Ham Radio* magazines!), so we've set up a way for you to sponsor a school subscription. For \$15 a year—about 4¢ a day—you can be the one who gets the kids in your local school excited about amateur radio. At \$15 we're not making any money, but amateur radio could be picking up another youngster. Well worth it, don't you think? To get this going, send us the name and address of the school library you'd like to sponsor. We'll get their subscription going and send them a letter pointing out your generosity. We'll also publish your name right here in QRX as our way of publicly thanking you for your support of your hobby. Send your info to 73 Magazine, Editorial Offices, WGE Center, Peterborough NH 03458.

Camp Kids

OK, WE'RE ON A ROLL with this kid stuff, so let me tell you about a group of hams who got together up at the YMCA's Camp Manito-wish in Wisconsin. Their ninety-minute presentation covered the highlights of our hobby, starting with a quick overview of ham radio history by Don Kupferschmidt KD9PT. Don also touched on our new volunteer licensing program and the differences between CB and ham radio. Jay Van Der Burgt KA9MSR jumped in next to help demonstrate various modes of operation, with CW demonstrated by Mike Kurtz AA9Y and SSB shown by Jack Peterson KC9NE. KJ4R and KA9ODM helped out by operating from their homes a few miles away (an exceptionally good idea... nothing's worse than standing in front of 100 fidgeting kids calling endless CQs, praying for someone, anyone to please,

please come back to you!). More quick demos followed with Don describing VHF and repeaters, and packet radio. Finally, a question-and-answer period wrung out the adults with those difficult queries that come only from eager young minds. The point of all this is that taking ham radio to the kids is a heck of a lot of fun, isn't hard to do, and plants that little seed in their minds that, "Hey, isn't this neat? I could do that!" Be sure to send your stories to QRX so everyone can get ideas on how to do this sort of thing.

Calling Canada

WE HAVEN'T HEARD MUCH from our neighbors to the north recently, but rumor has it that the Department of Communications (DOC) is letting hams up there pick their own callsigns. (You have to wonder when things up there get quiet—Garrison Keillor of *A Prairie Home Companion* claims that the Canadians are plotting to invade the U.S. "You just can't trust them," he says. "They're too quiet.") Bill Leal VE3ACY, president of the Windsor Amateur Radio Club, mentions in *Ground Waves* that the DOC has everything all set up on a computer, and you tell them what call you want and they just give it to you. He changed from VE3IHB (I can see why!). On our side of the line, it looks as if the FCC will be letting us do about the same thing in the very near future. The FCC will still issue the "official" callsign, but you'll be able to buy any call that you like and use that one on the air. The Feds will have a cross-index of who has what, so they can still nail you with a pink slip if you screw up. Things are in the rough planning stage as this is being written, but when it all firms up we'll have all the details. (I certainly wouldn't mind getting rid of KW1O. Yechh. Wayne says he would pay big money for the call he wants: "W.")

Book Nook

HERE'S YOUR CHANCE to pick up Christmas gifts for everyone you can think of! 73 is back in books; we're kicking things off with two classics: *The Contest Cookbook* by Bill



Hamming it up at Camp Manito-wish. Photo by KC9NE.

Zachary N6OP and *The Magic of Ham Radio* by Jerrold Swank W8HXR. The *Cookbook* covers every aspect of amateur contesting, from station layout to equipment to techniques. Separate chapters are devoted to domestic, DX, and VHF contests. This book includes tips from winners on how you can be a contender! 170 pages, \$5.95. Jerrold Swank's *Magic of Ham Radio* is filled with the excitement of amateur radio—stories of daring rescues and life-saving communication. This is a book you'll want to give to your friends when you want them to become interested in ham radio! 156 pages, \$4.95. Send your order to 73 Books, WGE Center, Peterborough NH 03458. Please add \$1 to your order for postage.

Chip Tip

CHUCK HOUGHTON WB6IGP say that some folks are having trouble getting the TDA-7000 chip for his i-f amplifier ("Microwave Building Blocks: The I-f Amplifier," October, 1986, page 42). Chucks says that he has picked up a gross and will sell both the TDA-7000 and the printed-circuit board for the project for \$10 postpaid. Get in touch with him at 6345 Badger Lake Road, San Diego CA 92119.

MARC Mark

THE MICHIGAN AREA REPEATER COUNCIL has overwhelmingly voted to move directly to a 20-kHz band plan in the state. Existing repeaters have all been included in the new coordination scheme, although a few sites have some problems. MARC officials expect to have everything resolved and all repeaters in Michigan on the 20-kHz plan by year's end. The council also has elected new officers: Rod Moag W0NDS takes over as Chairman, Jim Brooker NI8E steps in as Vice-Chairman, and Paul Englehart KA8BFF keeps his post as Secretary.

ATIS Onus

THE FCC is looking at a proposal (GR Docket 86-337) that would require an automatic identification of all satellite uplink signals. The system, cleverly called the Automatic Transmitter Identification System (ATIS), would help track down interference in the satellite service, whether it is deliberate or accidental. A unique identification code would be imbedded in every transmitter at the time it was manufactured. Vigilantes like Florida ham Captain Midnight are fairly rare, but it is common for technicians to aim portable uplink dishes at the wrong satellite. ATIS would allow for instant identification of the culprit. Of course, a true hacker out to ax a bird would not worry at all about ATIS...he would find some way


around it. What interests hams about 86-337 is that the FCC is also asking whether all radio transmitters should be equipped with ATIS; that includes ham gear. Hmm... maybe we could do away with callsigns altogether.

Still III

THINGS LOOK GRIM for our old friend AMSAT-OSCAR 10. Efforts to write a program that could work around damaged areas in memory appeared at first to be successful, but in the past few weeks more problems have surfaced that spell the end of AO-10. The satellite is operating right now in an unpredictable manner; you never know what mode is going to be on when. The mode-B transponder is stuck on, and AMSAT ground controllers have been allowing limited mode-B operation during part of each orbit. AO-10 will be moving into an eclipse period very soon, and unless something drastic happens to perk the bird up, it will not receive solar energy to charge the batteries. There is currently no way to adjust the satellite's sun angle to compensate for the diminished sunlight—once the batteries are dead, AO-10 will be silent.

Contest Code

FREE SOFTWARE is available from Bill McClellan KV0I for Commodore C-64 or C-128 owners who plan to operate in the 1987 73 World SSB Championships. The program is a

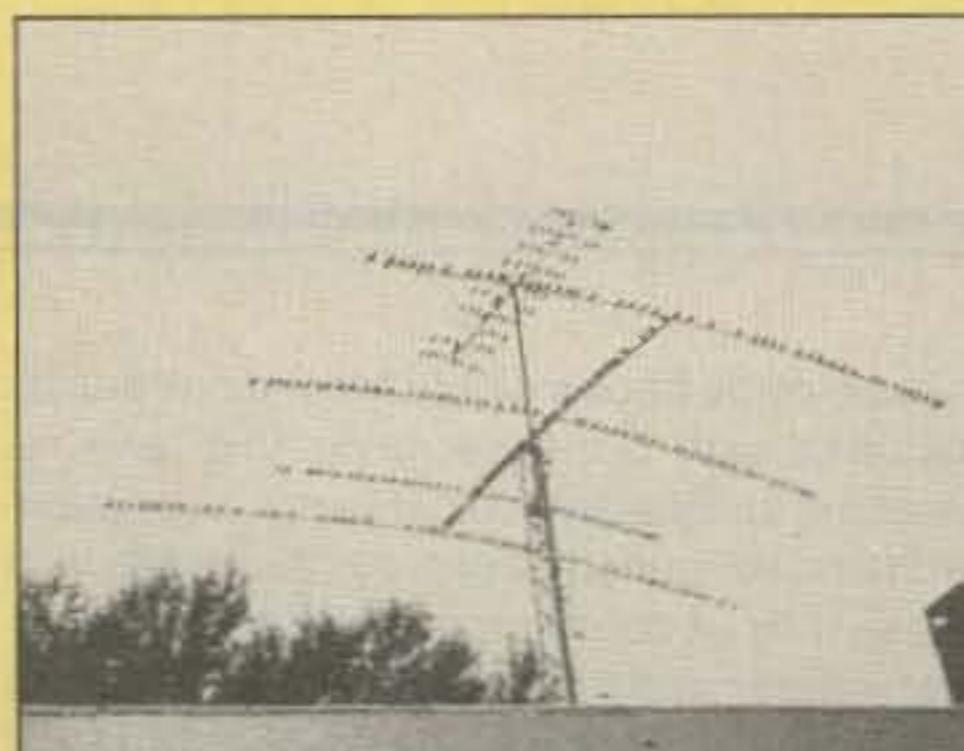

"Seems this fellow was hearing a few birdies in his receiver...." Photo by W0RIM.

logger for the contest, and features a fast machine-language duper/sorter, real-time scorekeeping, and hard copy of logs. (We'll be printing the rules for the Championships next month, along with the results of this year's test.) If you would like a copy of the program, send a self-addressed, stamped disk mailer (SASDM?) to Bill at 3304 Jo Ann Avenue, Omaha NE 68123.


Fuji OK

AMATEUR RADIO'S newest satellite was launched after a few delays on August 12th. The bird has worn three names, starting life as JAS-1, changing to OSCAR 12 after launch, and now rededicated Fuji-OSCAR 12

(FO-12). Japanese spacecraft are christened with a flower's name when they start operation in space; Fuji is the Japanese word for wisteria. Early users report that FO-12 is very sensitive, easily accessed with only 100 Watts ERP. Mode-JA uplink is from 145.900 to 146.000 MHz, with the downlink falling at 435.900 to 435.800 MHz. The transponder inverts uplink signals: To calculate a downlink frequency, subtract the uplink frequency from 581.800. The beacon is at 435.797. JARL recommends that CW be used in the lower third of the passband (435.800–435.835 MHz), with SSB in the upper third (435.865–435.900 MHz) and mixed CW/SSB in the middle third. The digital transponder, mode JTD, is currently being tested and should be running by the time you read this. For tracking information, get in touch with AMSAT at PO Box 27, Washington DC 20044.

Done

That's a wrap for this issue. We had input from *The W5YI Report*, *Amateur Satellite Report*, *The Westlink Report*, and John Hackman WB4VVA. We're always looking for fun stuff to run; send your news to 73 Magazine, WGE Center, Peterborough NH 03458, Attention QRX. Slip a twenty in the envelope if you really want your item published (just kidding, Wayne...). Oh, you can also send things via CompuServe at 70310,775, or via MCI Mail at WGE PUB.

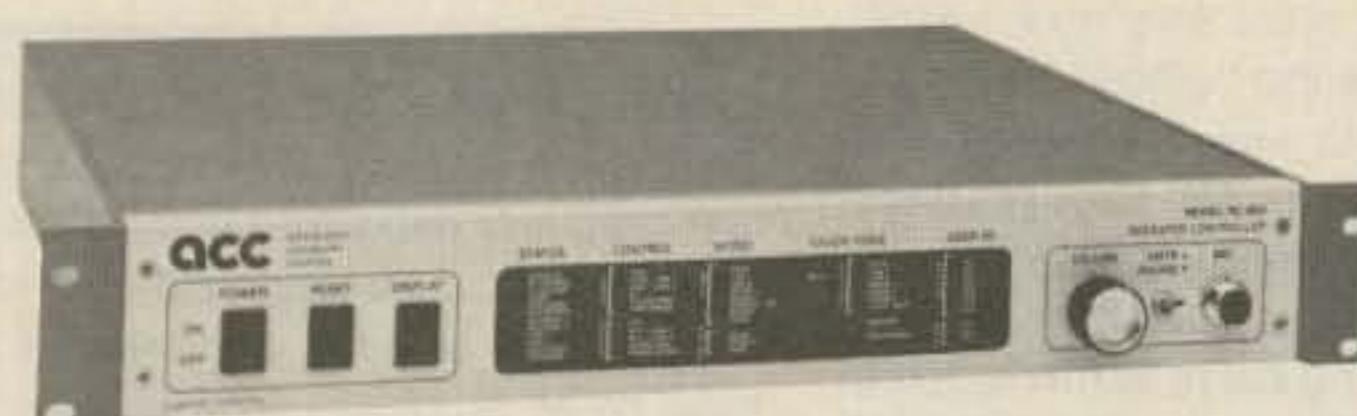

The RC-850 Repeater Controller . . . when only the best will do.

With an RC-850 controller, your repeater becomes fully remotely programmable — command codes, timers, autodial numbers, ID and tail messages . . . virtually every parameter can be easily changed. Touch-Tone programming from your radio or the phone with synthesized voice confirmation.

The patch supports local and radio-linked remote phone lines, so you can extend your patch coverage to match your RF coverage. Now you can have a full featured patch even if you can't get a phone line at your site. The 250 autodial slots meet everyone's needs, with up to 35 digit storage for MCI/Sprint.

The easy-to-use mailbox lets you include phone numbers, times, or frequencies as parts of messages. And it's so smart, it'll leave you a message if you miss a reverse patch or an alarm.

Selective call capabilities range from two-tone to numeric display paging, so you'll always be available. And its voice response metering continuously stores low and high readings — so you can find out how cold it gets, how high the reflected power reads . . . and when.

Individual user access codes, with callsign readback, give you secure access to selected functions to completely prevent horseplay.

Advanced Computer Controls continues to lead the way in advanced repeater technology, changing the face of amateur repeaters every day. ACC controllers offer users, control operators, and site managers features and tools to make operation more convenient, useful, and FUN!

The industry's top-of-the-line controller — for your repeater.


acc

advanced
computer
controls, inc.

2356 Walsh Avenue
Santa Clara, CA 95051

(408) 727-3330

v1

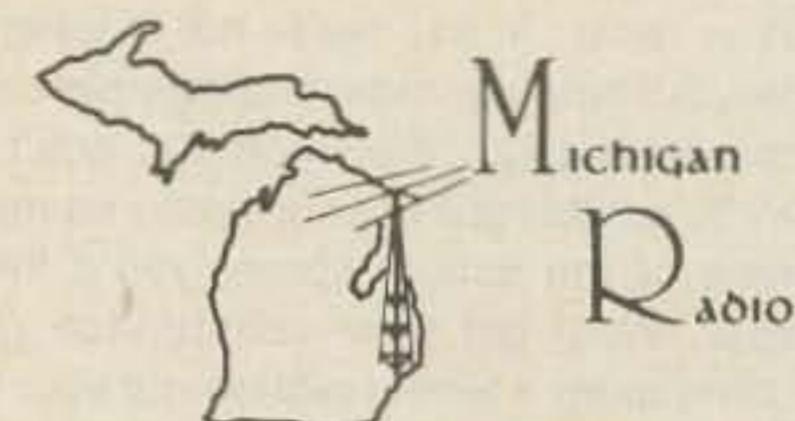

313-469-4656

Amateur, Business
Marine, and SWL
Major Credit Cards
— We ship UPS —
Most Major Brands
— Sales & Service —


WE STOCK
Radios, Ant, Books
and Accessories

ICOM, Kenwood, Yaesu
and Many More!!

Call For Prices

v162

28360 South River Road Sun., Mon.—Closed
Mt. Clemens, MI 48045 Tue., Wed., —10-6
Thurs., Fri.—10-9
Sat.—10-4



KENWOOD

...pacesetter in Amateur radio

Hurry!
Offer Extended
thru Nov. 15.

Kenwood CASH

REBATES

TS-440S
\$50.00
Cash Rebate

For complete Details & Rules
ask your
Authorized Kenwood
Dealer for a
Kenwood Cash Rebate
Self-Mailer

TM-2570A
\$40.00
Cash Rebate

OFFER GOOD ONLY
JULY 21, thru NOVEMBER 15, 1986

TS-430S
\$25.00
Cash Rebate

TH-21AT /31AT/41AT
\$10.00
Cash Rebate

TR-2600A /3600A
\$15.00
Cash Rebate

KENWOOD

TRIO-KENWOOD COMMUNICATIONS
1111 West Walnut Street
Compton, California 90220

NEVER SAY DIE

from page 4

times—I just haven't passed my 20-wpm test.

Yep, I peeped. Well, I have to tell you it was fun. That was back when I was 12 and in the Boy Scouts. After patrol meetings our group would go out and peep in ground floor apartment windows. The head peeper patrol leader would gasp in amazement, naturally driving the rest of us to peek. We'd gasp too. The fact is I never saw anything. But education is what the Boy Scouts is for, isn't it? And what better sex education than a good peep at the right time. It's just our timing was bad.

Now this camouflaged suit business is a real tipoff. Something extra has to be wrong with people who wear camouflaged T-shirts—sox—hats, and that nonsense. You show me an Extra-class ham in a camouflage suit and I'll show you some real running speed. Where's my bullet-proof vest—the one I wear to ARRL conventions?

I say let's stop this carnage. Let's petition the FCC to stop the 20-wpm code test before it's too late and we drive more innocent hams over the edge.

SAN DIEGO

The ARRL National Convention this year was in San Diego in early September. Though there weren't many exhibitors, the event sure brought out the local hams—very good attendance. I heard some



To celebrate W2NSD's visit to Tijuana during the ARRL National Convention, every donkey in the city was painted to look like a zebra.

estimates of 5,000. This is surprising for California. The weather couldn't have been better.

Since I got on the speaker's list late, all they had left open was Sunday morning—sure death for a speaker. Well, the room wasn't packed as usual, but an estimated 300 turned out—astounding for Sunday morning. Even more so when you know the hamfest only ran from 9 to 12 on Sunday and my talk was from 10 to 12!

One of the problems with talking at such a difficult time is that I find I'm preaching mostly to the converted—the hard-core Wayne Green fans. If we're going to get amateur radio growing, I've got to get more hams to read 73—so I need to reach the Wayne Green haters—and, even more, the apathetic, many of whom don't read 73 and haven't even heard of me.

Maybe you have some ideas on how I can get more hams to read

73. Unless a lot of readers are lying to me, I've perked up the magazine so it's fun to read again—more fun than any other ham magazine—which, alas, isn't very difficult. When I send letters to the *Callbook* list I find that about 98% of the hams just throw my letters away. I don't even know if they open them. Talk about depressing! So maybe you have some ideas?

Look, if you want to get a 300-page magazine every month—packed with construction articles, hot news on packet, international news, and so on, it's going to take 120 pages of advertising. That's a fact of publishing life. And that doesn't put me on easy street, that's just in order to break even.

Now, how do we get 120 pages of ads the way we used to a few years ago? First we have to have about 120,000 paid readers. The rule of thumb is that a magazine should be able to sell about one page of ads for every thousand readers. So if we can double the number of 73 subscribers, I think we'll be able to turn out some 300-page magazines for you and make 73 as exciting as it was around five and ten years ago.

So what do you suggest I do to get your friends to subscribe? It'll help if you try not to keep a total secret of how much you enjoy the magazine now. It won't hurt if you bring up the matter of getting club members to subscribe at club meetings. I even have some attractive group subscription deals for clubs.

Just having 120,000 readers won't magically get us 120 pages of ads. I'm going to need a good deal of help here, too. Many firms are so brainwashed about *QST* that they'll go out of business never even trying their ads somewhere else to see if they'll bring more sales and save their companies. You can help here by boarding them at hamfests and telling 'em you're looking for their ads in 73. If you happen to correspond with them about something, mention it.

73 has the most lively bunch of ham readers of any ham magazine—our advertisers constantly tell us their ads pull sales much better from 73 than anywhere else—yet even though it's costing 'em thousands of dollars in sales—cash money out of pocket—I see many ham firms not even giving us a chance to show how we can build their business.

The advertisers put a lot of store in the Reader Service requests we

STAFF

PUBLISHER
Wayne Green W2NSD/1

ASSOCIATE PUBLISHER
Stuart Norwood

EDITOR
Perry Donham KW1O

MANAGING EDITOR
Chris Schmidt KA1MPL

PRODUCTION EDITOR
Steve Jewett KA1MPM

INTERNATIONAL EDITOR
Richard Phenix

COPY EDITOR
Robin Florence

ASSOCIATES

Mike Bryce WB8VGE

John Edwards KI2U

Bill Gosney KE7C

Jim Gray W1XU

Dr. Marc Leavey WA5AJR

Bill Pasternak WA6ITF

Harold Price NK6K

Peter Putman KT2B

Mike Stone WB0QCD

Dr. Ralph Taggart WB8DQT

ART DIRECTOR/
PRODUCTION SUPERVISOR
Dianne Ritson

PHOTOGRAPHER
David Leifer N2ESS

ADVERTISING
1-603-525-4201
1-800-225-5083

SALES MANAGER
Nancy Ciampa-Mallette

ADVERTISING SALES
Jim Godron N1EJF

SALES SERVICES MANAGER
Hope Currier

WGE PUBLISHING, INC.

VICE PRESIDENT, PUBLISHING
Jim Connell

VICE PRESIDENT, DEVELOPMENT
James S. Kendrick

CHIEF FINANCIAL OFFICER
Richard Yee

BUSINESS MANAGER
David P. Raether

PRODUCTION MANAGER
Bill Heydolph

SYSTEMS MANAGER
Sara B. Philbin

TYPESETTING/PAGINATION
Bob Dukette, Linda Drew, Susan Allen

GRAPHICS SERVICES
Richard Clarke, Manager;
Sue B. Flanagan, Dan Croteau,
Deborah Smith

Editorial Offices
WGE Center
Peterborough, NH 03458-1194
603-525-4201

Wayne Green Enterprises is a division of International Data Group.

73 Amateur Radio (ISSN 0745-080X) is published monthly by WGE Publishing, Inc., a division of Wayne Green Enterprises, Inc., WGE Center, Peterborough NH 03458-1194. Entire contents © 1986 by WGE Publishing, Inc. No part of this publication may be reproduced without written permission from the publisher.

EA4DDJ

ESPAÑA



QSL OF THE MONTH

To enter your QSL, mail it in an envelope to 73, WGE Center, 70 Rte. 202 N., Peterborough NH 03458, Attn: QSL of the Month. Winners receive a one-year subscription (or extension) to 73. Entries not in envelopes cannot be accepted.


We're Building the West's Largest Convention of Amateur Radio Operators



Las Vegas, Nevada

EXCUSE OUR DUST! We're busy building the largest annual convention of amateur radio operators in the West and we're not stopping to rest along the way. Last year we called it "OCTOBERVENTION" and it was incredible! Now it's HAM/WEST and it's going to be even bigger and better! We have only one goal — to be the biggest ham convention in the West! We've got it all — prizes, technical talks, exhibitors with those new products for Christmas, giant flea market, free VEC exams, free cocktail party, awards banquet and ladies' programs, not to mention all the fun, excitement and glamour of Las Vegas and the beautiful Western scenery and climate!

ALL WE NEED TO COMPLETE OUR CONSTRUCTION PROJECT IS YOU! How do you become a part of this exciting new chapter in amateur radio history? Just send us this form, call your travel agent or fire up your mobile rig, and plan to BE THERE!

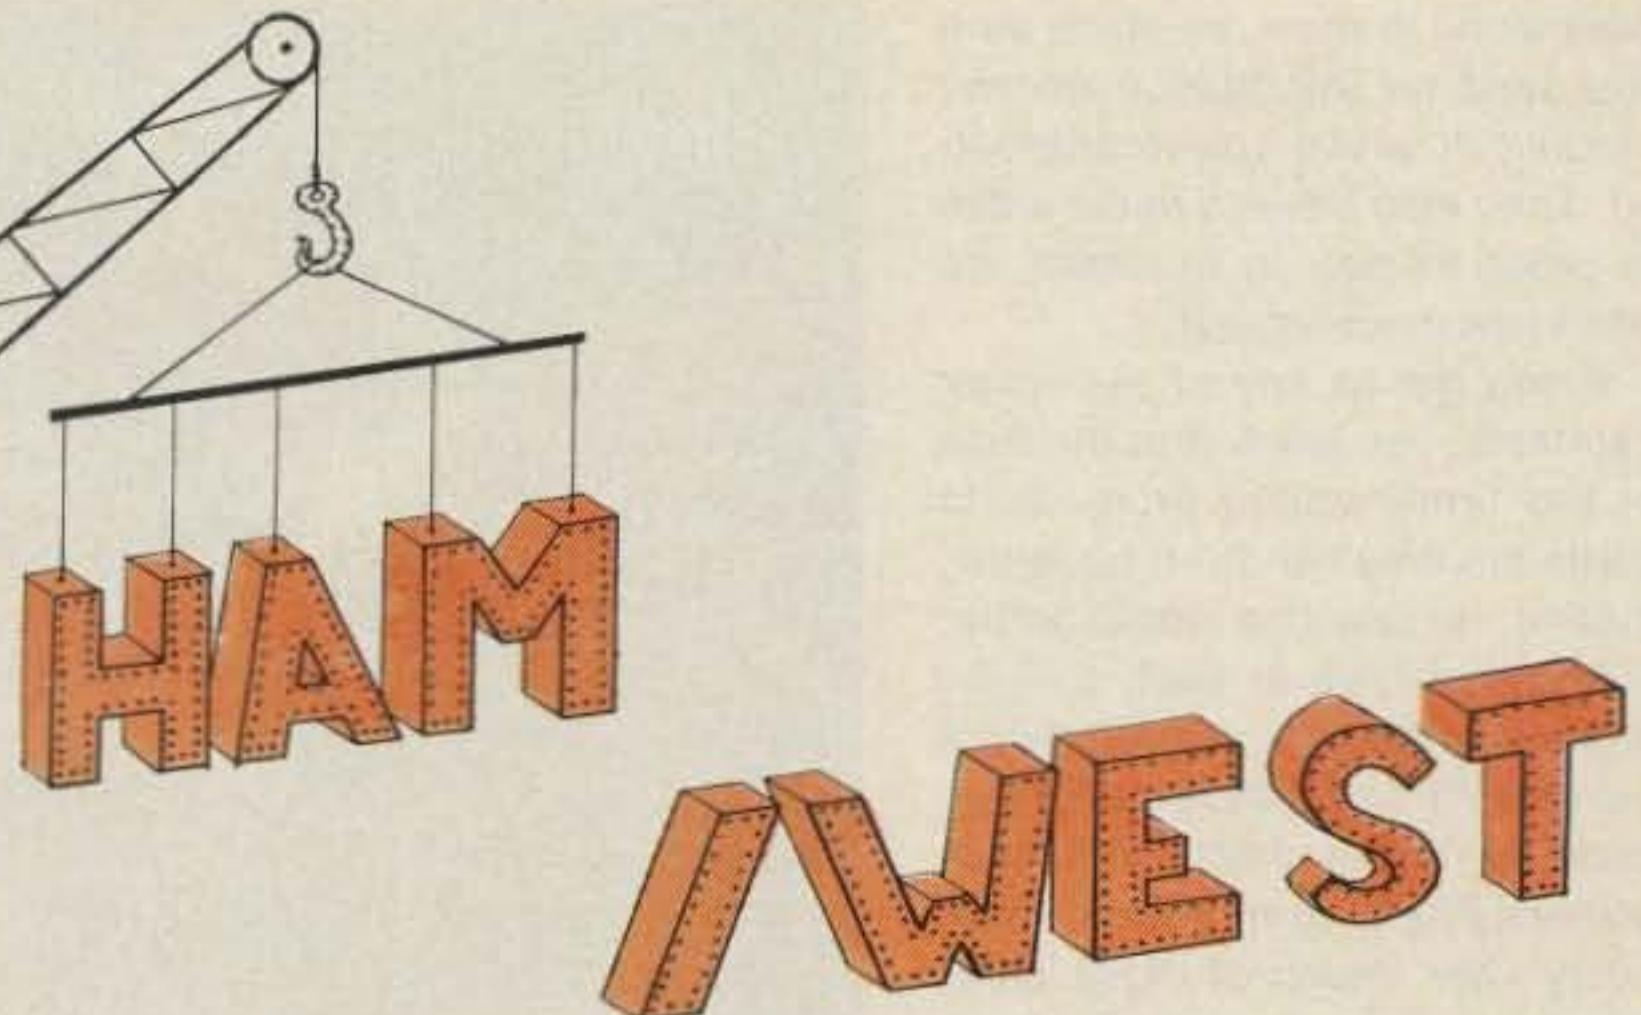

November 7-8

All day Friday and Saturday

GENERAL INFO: Plan to travel on Thursday. Exhibits and forums will be open 8 a.m.-5 p.m. Friday and 8 a.m.-4 p.m. Saturday. Awards banquet will be at 8 p.m. Saturday.

REGISTRATION INFO: Every person taking part in the HAM/WEST activities must be registered. Advance registration is \$12 before October 24 (\$15 at the door) and includes prize tickets and admission to all HAM/WEST activities except the banquet. It is not necessary to be registered to purchase tickets for the Saturday evening awards banquet. Flea-market sellers must be registered; outdoor spaces measure 16'x20' (two parking spaces). Born in 1966 or later? Request complimentary "admission-only" tickets (no prizes) at the door. And — there's no fee for VEC exams taken at the convention!

HOTEL INFO: To guarantee your room, you must **make your room reservations directly with HAM/WEST**, either on this form or by phone (if charging to a credit card), and **make payment in full before October 1, 1986**. Reservations not paid by that time will be accommodated on a space-available basis only. Call HAM/WEST at 702-361-3331.

RV INFO: Call Camperland directly at 800-634-6942 to reserve a space with full hookups right on the hotel grounds. Be sure to mention HAM/WEST. Call now. These spaces fill up early!

I WANT TO REGISTER FOR HAM/WEST '86:

Name _____ Call letters _____
Address _____
City _____ State _____ ZIP _____



I WANT TO TAKE A VEC EXAM, CLASS _____.

(Please enclose a self-addressed, stamped envelope marked "VEC Exam" with this application if you are planning to take an exam.)

PLEASE RESERVE A ROOM FOR ME AT THE HACIENDA HOTEL:

Register room to _____
Last name _____ First name _____ M.I. _____

Arrival day/date _____ Arrival time _____

Departure day/date _____ Number of nights _____

How many persons will stay in this room? One (\$55.00/night) Two (\$55.00/night) Three (\$65.00/night) Four (\$75.00/night)

How many beds do you need? One double bed Two double beds One king-size bed

Any special requests? _____

Amount for room \$ _____ Check or money order enclosed

Plus 7% room tax \$ _____ Charge to credit card # _____ Exp. date _____

Advance reg. \$12/person \$ _____ Print your name _____ Phone _____ / _____

Banquet, \$20/person \$ _____ M/C VISA

Flea market, \$20/space \$ _____ AMEX Authorized Signature _____

Total amount \$ _____ Note: We will bill your credit card account in full when your registration form is received.

HAM/WEST, P.O. Box 19675, Las Vegas, NV 89132, 702-361-3331

pass along to them, so make sure you send for information on any product in which you're interested. They also have to make sales in order to stay in business, so don't jerk them around.

If you get to any of the major hamfests, you know that the bulk of the firms selling products to hams are small and run by hams. Indeed, no one else would bother to try to survive in such a dying market. In the past, a large part of the sales of ham gear was to newcomers. These days, with newcomers dropping more and more every year, much of those sales are gone. That leaves us with a relatively small group of active hams—plus a raft of semi-active—the hams who have been rag-chewing for years with the same old gear—talking with the same people year after year.

DXers and contesters have to keep more up to date or else they fall behind. We're seeing most of the top DXers and contest hams using the newest computer-controlled rigs—putting up newer and better antennas every couple years—using a computer for log and record keeping.

The chap in the booth next to 73 had a corking good program for



W2NSD/ZF groping for grouper in Cayman Brac.

working the Sweepstakes contest—a contest I always used to enjoy. It keeps track of every contact, checks for duplicates, let's you know what sections have been worked and which are still needed, and so on. It sure would have made my contesting a lot easier to have an aid like that at hand!

Speaking of contests, it's getting on time for someone with contest experience to write some instructions on how to win contests.

Contests are won, for the most part, by hams who thoroughly believe that winning isn't just important—winning is everything. So I'd like to see helpful hints on winning contests—like how to leave openings in your log for the later insertion of normal-looking mythical stations from missing sections or countries. After all, the contest log checkers can't verify everything, right? So if you put in some calls you know, but which you didn't hear during the contest,

who's to know? It's despicable to win a contest certificate by such scurrilous skullduggery, but unless we let everyone know the contemptible techniques used by some of the high scorers who seem to have forgotten that amateur radio is a hobby—for fun—they'll be at a serious disadvantage. Only by bringing such treachery out in the open can it be thwarted, so let's have some facts on how some conscienceless hams have been screwing their more honest fellow hams.

One of the more fun aspects of the hamfest was the hospitality suites after the show closed. The 10-GHz group outdid everyone else with a bluegrass band—Gerry Earl N6LYX lead guitar and singer. Of course I'm a sucker for bluegrass music anyway. I've been increasingly upset that no bluegrass has yet come out on CD (at least that I know about). I wonder how many ham bluegrass groups there are out there? I'd sure like to find one in each city where there's a major hamfest so I could organize a hospitality room, complete with a small band.

My good friend Chuck Martin WA1KPS, who used to run Tuft's Electronics, plays a mean blue-

MAKE THE RIGHT CONNECTION

The CES phone patch is the
RIGHT CONNECTION for your
mobile radio-telephone
system.

Phone Patches

- Full Duplex
- Half Duplex
- VOX Simplex with EVD
- Sampling Simplex

CES — Simply the
Right Connection for

- Ingenuity
- Quality
- Reliability
- Service
- Value

1-800-327-9956 (Sales)
1-800-237-0030 (Service Only)

CES

Announcing the HF/VHF/UHF base station you'll hear about on the air.



Listen for Yaesu's FT-767GX everywhere you might hear it: HF, 6 meters, 2 meters and 70 cm.

You'll hear operators calling it the ideal HF/VHF/UHF base station for small ham shacks and apartments.

And they'll rave about its full-featured performance and highly attractive price.

You see, the FT-767GX continues the price/performance tradition of our popular FT-757GX. But with even more features.

When you're ready to expand beyond HF coverage, just plug in optional modules for 6-meter, 2-meter, and 70-cm operation.

As standard equipment, you get a built-in HF automatic antenna tuner, AC power supply, digital SWR meter, digital power output meter, electronic keyer, and CW filter.

And operation is smooth and intuitive with keyboard frequency entry. Dual VFOs that tune in 10-Hz steps. A digital display in 10-Hz steps. And ten memories that store mode, frequency, and CTCSS tone information.

The FT-767GX is ready to operate full duty cycle at full rated power

output for up to 30 minutes. And it listens from 100 kHz to 30 MHz.

Plus your station is really complete with full CW break-in, our patented Audio Peak Filter for CW operation, a CW TX offset variable 500/600/700 Hz, IF shift, an IF notch filter, a Woodpecker noise blanker, a VFO tracking system for slaved A/B VFO tuning, and optional CTCSS unit for repeater operation. And that's just a partial list!

But the best way to discover its full-featured performance is to visit your Yaesu dealer today.


Yaesu's FT-767GX. The affordable way to be heard on HF, VHF and UHF.

YAESU
Our 30th Anniversary.

Yaesu USA
17210 Edwards Road, Cerritos, CA 90701
(213) 404-2700
Customer Service: (213) 404-4884
Parts: (213) 404-4847

Yaesu Cincinnati Service Center
9070 Gold Park Drive, Hamilton, OH 45011
(513) 874-3100

Prices and specifications subject to change without notice.

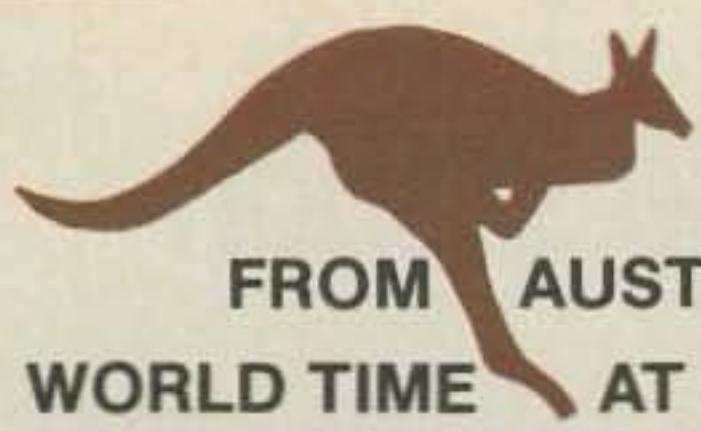

FROM AUSTRALIA
WORLD TIME AT A GLANCE with
"ZONE VIEW GLOBAL CLOCK"



QUARTZ
10 INCH
DIAM.

U.S. Pat. No. 4,502,789

Local Hour Pointer Attaches on Home Zone

WHICH
DISPLAYS WORLD
ZONE TIMES FOR

RADIO
OPERATORS

TELEX
OPERATORS

I.S.D. USERS

EDUCATORS

GENERAL
and
HOME USE.

TIME ZONES
DIFFERENTIATED
BY COLOURS.

ALSO SHOWS
HALF HOUR ZONES
and method to know
which DAY applies.

Order Direct From **RESEARCH ENGINEERING CO.**

1319 Main Rd., E. Eltham, Australia 3095
Enclose price U.S. \$75 plus S.A.L. P+P \$10
Pref. Bank Draft.

New for

KENWOOD TH21AT, 31AT, 41AT
a Fastcharger



SPECIAL SALE!

\$54.95

Now \$49.95

+ \$3.00 shipping and handling
FL res. add 5% sales tax

Save \$15.00 when ordering
charger with accessories kit.

Features:

- Charges in 15 minutes
- Automatic Voltage cut-off
- Battery doesn't heat-up
- Modification to charge PB21H
on request at no extra charge
- 12v-14vdc input
- No memory
- Proven in daily use

Optional AC adapter with DC and mobile cords
available **\$19.95** **\$9.95**

46

Charge-Rite

P.O. Box 4175, Vero Beach, FL 32964 (305) 476-8580

Call and talk with
Paul WB4WIG or
Dr. "S", WA4DRV

grass guitar. It made the drive from Denver to Aspen go quickly as we sang our way across the mountains on our yearly ham industry skiing trip there. I think we'll be hitting Aspen again this January—HTs tying us together as we ski the different areas.

I wish a group in San Diego would get a yearly hamfest started so it could build up attendance. You don't get a big pull the first year or two—these things have to build up.

San Diego isn't far from L.A.—has perfect weather—it could do well as a yearly hamfest site. It's got plenty of interesting things to see—such as Old Town, Tijuana, and the famous San Diego Zoo. Let's do it again.

The Las Vegas hamfest in November looks as if it will be a yearly affair, so I'm rooting for it. The chap running it has lots of good ideas and needs all the cooperation he can get. The old Saroc hamfest built up for a while, but then was killed off by what I saw as extraordinarily poor management. I know I got lied to and shafted—and I heard from others with similar problems.

By having the hamfest just before Comdex, it should pull in not only those California hams who enjoy a couple of days in Vegas, but get the computer industry hams to come a couple days early—and there are a whole lot of hams in the computer business.

**THROW YOURSELF
INTO THE VOLCANO**

It's getting time for some human sacrifices if we're going to save amateur radio. It's a drought and the crops are dying. How about you—are you willing to sacrifice to help stop the bleeding?

A letter from Ed WB6IDP had a good suggestion. One of the reasons we're losing more and more hams every year is that such a high percentage of Novices aren't making it to Tech or General. If we could improve the percentage of Novices who stay with us, we might at least break even and stop falling behind.

If we can get Novices to increase their interest in amateur radio, we stand a very good chance they'll infect some of their friends with their enthusiasm and help us get more Novices. This goes particularly for the 15% of the newcomers who are teenagers—the ones we need most to reach.

Okay, how can we get Novices to stick around? Well, one simple

way is to make sure they find amateur radio fun. Novel thought, eh? Now let's have a show of hands—how many of you have worked a Novice in the last two months? Humph, I thought so. You're so damned busy rag-chewing you haven't any time to try and make life more fun for Novices. What the devil do I have to do, start a contest and give certificates to bribe you to do your civic duty and put in some time with your key and help our Novices have some fun?

Let's be honest about this now...you're probably going to have to do some code practice to get your speed up to five per so the Novices won't embarrass you. If I had it my way every ham who insists on our keeping the code test would have to be tested every year at a minimum of 35 wpm. So get out your code tapes and spend a few weeks getting your speed up to 5 wpm and then get on one of the Novice bands and be nice. None of this QLF crap, okay? I can't tell a D from a TI when you send it, you know. Bad when you have the DTs. Let me know how long it takes you to figure that one out.

Rather than tell the poor Novice about that old rig you're using, I suggest you look up one of the modern ones in 73 and just tell 'em you're using one of those. After all, the chances are your rig was made before the Novice was born and he's never heard of it. Once the ARRL gets their new \$6 million museum up and running, Novices may get to be more familiar with your gear.

I'll bet you thought I was going to be critical of the League for putting so much into a museum instead of investing it in promoting the growth of the hobby. Nope, not me. I think they see amateur radio about to crash in the near future, so the best possible investment will be a museum so later generations will be able to know there once was something called amateur radio. Good move. I've got some first-class stuff I might donate...been wondering what to do with it.

I can hear the consternation now as Extra-class ops ask each other where the Novice bands are. Anyone got a *Callbook*? Maybe there's a frequency chart in there. How about the *Handbook*? Hmmm, I wonder if my 1955 edition is still okay to use? I don't see any point in buying the damned things every year.


Continued on page 62

Spectrum Repeater/Link

High Performance Boards & Sub-Assemblies

New FL-4 UHF Helical Resonators

Installed in Receiver
or FL-4H Preselector Unit

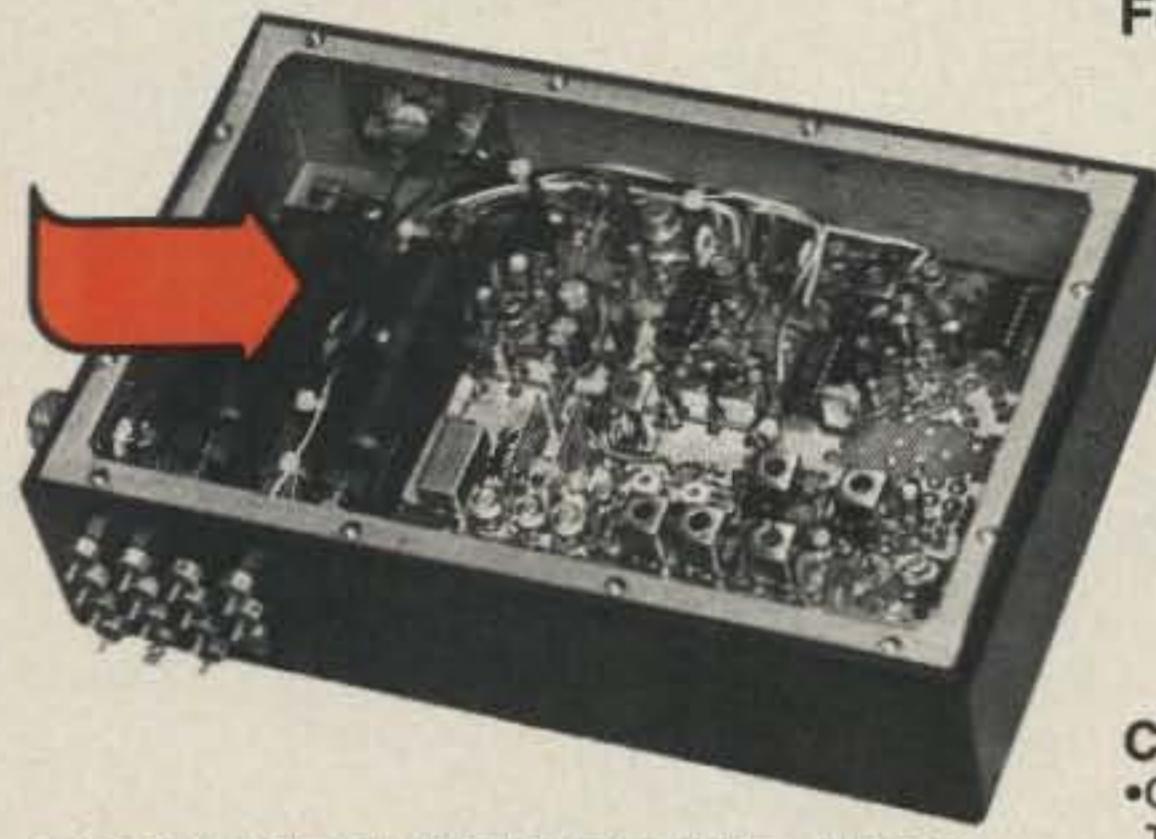

COMPLETE SHIELDED RCVR. ASSY.

VHF & UHF Receiver Boards


SCR200A-VHF SCR450A-UHF

- Totally Advanced Design!*
- 8 Pole Front End Fltr. + wide dynamic range—Reduces Overload, Spurious Resp. & Intermod.
- Sens. 0.25 μ V/12dB SINAD typ.
- Sel. -6dB @ \pm 6.5 KHz. -130dB @ \pm 30KHz. (8 Pole Crystal + 4 Pole Ceramic Fltrs.)
- 'S Meter', Discriminator & Deviation Mtr. Outputs!
- Exc. audio quality! Fast squelch! w/0.0005% Crystal. ("Super Sharp" IF Fltr. also avail.)
- New! 30 KHz B.W. IF Filter for High Speed Packet.

Complete Receiver Assemblies

- Rcvr. Board mounted in shielded housing.
- Completely assembled & tested, w/F.T. caps, SO239 conn.
- As used in the SCR 1000/2000X. Ready to drop into your system!
- UHF Rcvr. Assy. Now Available w/Super Sharp FL-4 Helical Resonators. Greatly reduces IM & "out of band" interference!

FL-4H

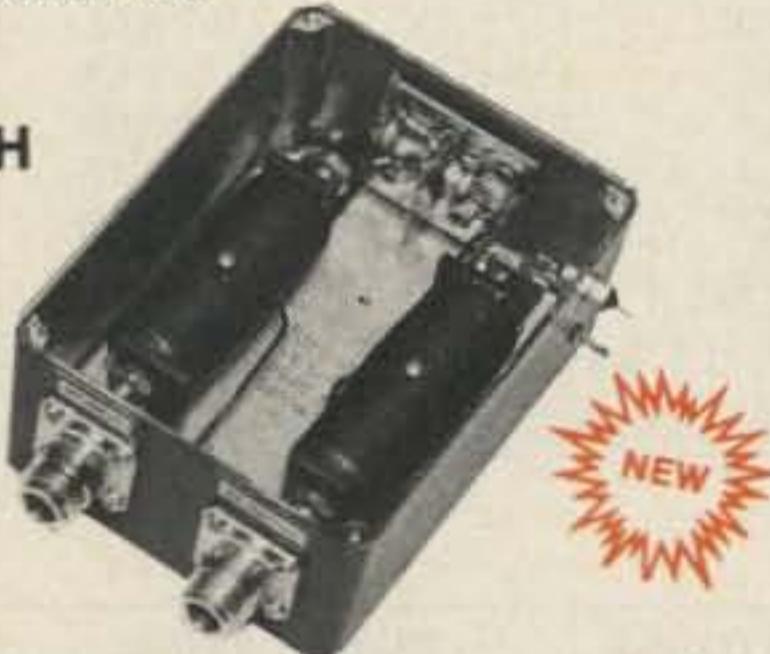

Receiver Front-End Preselectors

- FL-6: 6Hi Q Resonators with Lo-Noise Transistor Amp (2M or 220 MHz)
- FL-4H: 4Hi Q Helical Resonators & Lo-Noise Tr. Amp. in shielded housing. (420-470 MHz)
- Provides tremendous rejection of "out-of-band" signals w/out the usual loss! Can often be used instead of large expensive cavity filters.
- Extremely helpful at sites with many nearby transmitters to "filter-out" these out-of-band signals.


Call or Write for
Data Sheets

These are professional "Commercial Grade" Units—Designed for Extreme Environments (-30 to 60° C.) All Equipment Assembled & Tested.

For 10M, 2M, 220 MHz, & 440 MHz

ID250A CW ID & Audio Mixer Board

- Improved! Now includes "audio mute" circuit and "Emergency Power ID" option.
- 4 input AF Mixer & Local Mic. amp.
- PROM Memory—250 bits/channel.
- Up to 4 different ID channels!
- Many other features. Factory programmed.

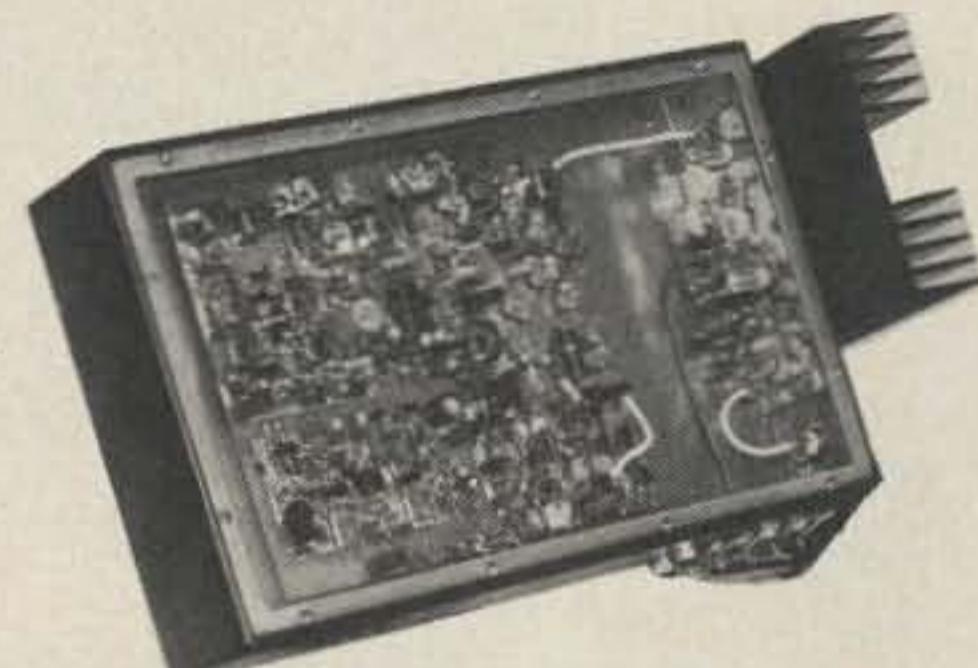


Improved SCT410B Transmitter Assy.

SCT110 VHF Xmtr/Exciter Board

- 10 Wts. Output. 100% Duty Cycle!
- Withstands High VS WR
- True FM for exc. audio quality
- Designed specifically for continuous rpt. service. Very low in "white noise."
- Spurious—75 dB. Harmonics—60 dB.
- With .0005% precision grade xtal.
- BA-30 30 Wt. Amp board & Heat sink, 3 sec. L.P. filter & rel. pwr. sensor.
- BA75 75 Wt. unit also available

Power Supply Bds


- SCP12 12VDC @ 0.3A out.
- SCP512 12 VDC @ 1A & 5VDC @ 0.4A out. (1.1A total max. out.)
- SCP512A As above, but also w/-12VDC @ 0.1A

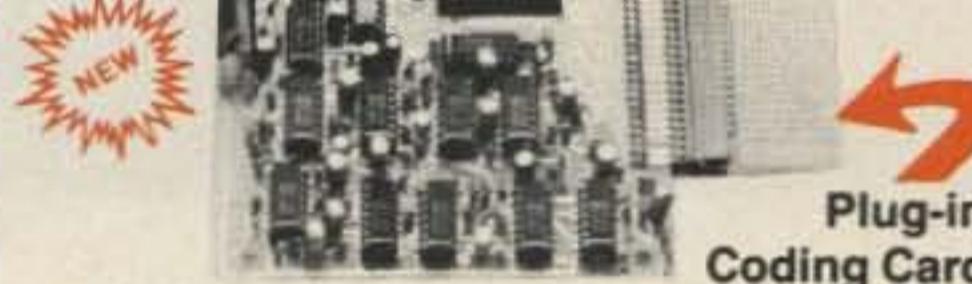

Plug-in
Coding Card


TTC300 TOUCH TONE CONTROLLER

- High performance, Super versatile design. To control any ON/OFF Function at a remote site via DTMF Radio Link.
- Uses new high quality Xtal Controlled Decoder IC, w/high immunity to falsing
- Decodes all 16 digits
- 3 ON/OFF Functions per Main Card. Easily expandable to any no. of functions w/Expansion Cards.
- Codes quickly field programmable via plug-in Coding Cards. Many unique 3-digit codes available. Not basically 1-digit as with competitive units.
- Latched or pulsed outputs.
- Transistor Switch outputs can directly trigger solid state circuitry or relays, etc. for any type of control function.
- Low Power Consumption CMOS Technology. 5VDC Input. Gold-plated connectors.

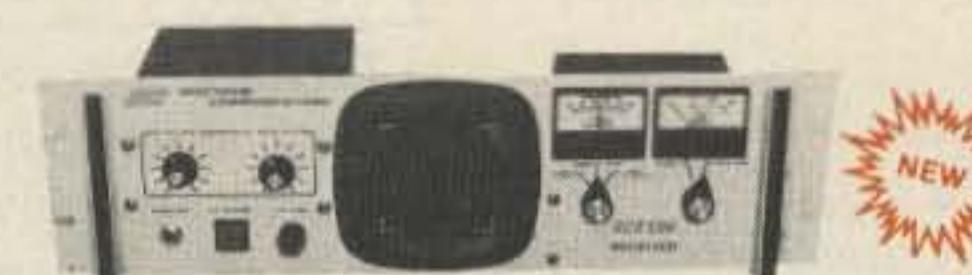

SCR 500 VHF/UHF COMMERCIAL LINK/CONTROL RECEIVER

- SCR200A or SCR450A rack mounted
- Available with or without meters and power supply
- SCT500 companion transmitter available

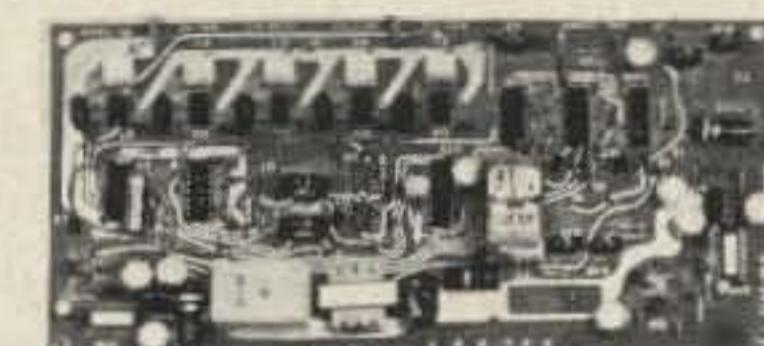

SCAP Autopatch Board

- Provides all basic autopatch functions
- Secure 3 Digit Access; 1 Aux On-Off function, Audio AGC; Built-in timers; etc. Beautiful Audio!
- 0/1 inhibit bd. also available
- Write/call for details and a data sheet

RPCM Board

- Used w/SCAP board to provide "Reverse Patch" and Land-Line Control of Repeater
- Includes land-line "answering" circuitry

Lightning Arrester For Autopatch

- Gas Discharge Tube shunts phone line surges to ground
- Handles up to 40,000 Amps!
- The Best device available to protect Autopatch equipment from lightning damage. \$17.00 + S/H.

I Se habla español!

v51

SPECTRUM COMMUNICATIONS CORP.

1055 W. Germantown Pk, S9 • Norristown, PA 190403 • (215) 631-1710 • TELEX: 846-211



Food for thought.

Our new Universal Tone Encoder lends its versatility to all tastes. The menu includes all CTCSS, as well as Burst Tones, Touch Tones, and Test Tones. No counter or test equipment required to set frequency - just dial it in. While traveling, use it on your Amateur transceiver to access tone operated systems, or in your service van to check out your customers' repeaters; also, as a piece of test equipment to modulate your Service Monitor or signal generator. It can even operate off an internal nine volt battery, and is available for one day delivery, backed by our one year warranty.

- All tones in Group A and Group B are included.
- Output level flat to within 1.5db over entire range selected.
- Separate level adjust pots and output connections for each tone Group.
- Immune to RF
- Powered by 6-30vdc, unregulated at 8 ma.
- Low impedance, low distortion, adjustable sinewave output, 5v peak-to-peak
- Instant start-up.
- Off position for no tone output.
- Reverse polarity protection built-in.

Group A

67.0 XZ	91.5 ZZ	118.8 2B	156.7 5A
71.9 XA	94.8 ZA	123.0 3Z	162.2 5B
74.4 WA	97.4 ZB	127.3 3A	167.9 6Z
77.0 XB	100.0 1Z	131.8 3B	173.8 6A
79.7 SP	103.5 1A	136.5 4Z	179.9 6B
82.5 YZ	107.2 1B	141.3 4A	186.2 7Z
85.4 YA	110.9 2Z	146.2 4B	192.8 7A
88.5 YB	114.8 2A	151.4 5Z	203.5 M1

- Frequency accuracy, $\pm .1$ Hz maximum - 40°C to + 85°C
- Frequencies to 250 Hz available on special order
- Continuous tone

Group B

TEST-TONES:	TOUCH-TONES:	BURST TONES:
600	697 1209	1600 1850 2150 2400
1000	770 1336	1650 1900 2200 2450
1500	852 1477	1700 1950 2250 2500
2175	941 1633	1750 2000 2300 2550
2805		1800 2100 2350



- Frequency accuracy, ± 1 Hz maximum - 40°C to + 85°C
- Tone length approximately 300 ms. May be lengthened, shortened or eliminated by changing value of resistor

Model TE-64 \$79.95



COMMUNICATIONS SPECIALISTS

426 West Taft Avenue, Orange, California 92667
(800) 854-0547 / California: (714) 998-3021



LETTERS

THE FIRST

J. L. Reinhartz did not originate the feedback circuit shown on page 68 of your September issue ("Kit Corner: Build a Two-Tube Receiver"). The first article covering the use of a fixed "tickler" for feedback and a variable capacitor for ease of control was the lead article in the December, 1919, *QST*. The author was "Donald F. Alexander, radio 1BK." I had just received license 1BK on October 1, 1919, but had been building receivers for two years.

The editorial box at the top of the article said, "This article is a description of a tickler-feedback set, and is destined, we believe, to be popular.... Receivers containing variometers are difficult of construction in the home workshop. Mr. Alexander's set is a cinch...."

My mother once told me of my father, "Son, your father has now an incurable disease... it is called the plague of total recall." So forgive me, too.

Don F. Alexander W8LK
Dayton OH

Forgiven. And, unfortunately, forgotten.—KW1O.

OUT OF TOUCH

In response to the August, 1986, Letter "AM-ATEUR RADIO":

Writers submit AM articles only to publishers interested in publishing AM articles; therefore you never see any at 73. If you never read any then it must be by choice because there are plenty out there.

Ever wonder why new transceivers have an AM mode? Is it because manufacturers are out of touch, or could it be that publishers are out of touch?

W6RNC is not stuck in the hobby of 40 years ago as you stated. He is 10-20 years ahead of his time. And don't feel sorry for W6RNC, feel sorry for yourself because you're the one missing out.

One final note. Get your equipment this year. The cost of the old gear is going up, up, up.... No

Number 18 on your Feedback card

one is making it any more, and once it's gone it's gone forever.

Art Rideout WA6IPD
Fallbrook CA

There seems to be a problem here. We don't publish AM articles because we don't get any; you don't send any in because we don't publish them. Believe me, 73 will survive a lot longer without AM articles than AM will without articles in 73. So the burden is on you and the AM community to come up with some interesting projects to send in—and I promise you that 73 will publish any article we think is worth reading... even if it's about AM.—KW1O.

FUNNY PAPERS

For years now I've been trying to promote ham radio to the younger generation; I just keep failing. Let's face it, the Japanese influx of computer games, cheap computers, and chicken band gear is hard to compete with. I sometimes think that the Japanese obsession with monster movies some years back was prophetic... they're likely to become the monster that ate the world.

Kids are highly impatient—they want it now. Kids aren't going to plunk down \$300 for some used gear if they don't have any interest. To generate this interest, they need the rig. Catch 22.

Young minds are innovative. If you can spark their interest, they soon find ways to get the money for bigger and better things. Home-brewing tends to foster basic skills and insights that appliance operators never will develop. I have known graduate engineers in our electronics industry who didn't know how to solder. This is how the Japanese got the ball from us and are running with it. Newington's answer to all this is a comic book. It is comic in more ways than one. The best it can hope to do is generate more appliance operators.

George Hermann N9BNH
Chicago IL

George, I agree with you that home-brewing is a great way to develop electronic savvy. However, we're looking at a hobby that's

changing... and holding on to the "old ways" just won't cut it anymore. There's nothing wrong with being an appliance operator; after all, the goal of ham radio is to communicate, not to sit around building transceivers. Giving Novices voice privileges is a good first step. Now let's push to drop the code requirement from the Novice license and really start communicating!—KW1O.

DOWNHILL

I believe that a high priority in the program to get amateur radio growing should be to prevail on the FCC to not discriminate against our young people, presently licensed as Novices or planning to become hams, in not allowing A3E in the proposed new "enhanced" Novice 10-meter phone band. I would like to remind the people at the ARRL who proposed this that this hobby of ours would not have grown as it did without a mass migration of us old-timers to 160-meter phone (AM) operation in the early 30s.

The reason the hobby is going downhill today is that our ham magazines no longer publish articles on how to build your own simple gear for a first station setup. The big bucks cost of the rigs presently advertised is out of reach for the majority of young people who might consider sweating out the Novice license requirements. With availability of the information and parts to build one's own gear, these people would be interested in becoming hams. The problem here is to turn around the present situation so local parts suppliers can get back into business to supply this group of prospective hams.

Irving Megeff KD2EF
Flushing NY

The cost of ham equipment is about the same as that of a stereo, or a home computer, or a dirt bike. Price is not the problem. Showing kids how to build a station out of a scrap TV won't help, either—at best they'll get a QRP transmitter that barely gets out of the yard and a junky super-het receiver to match. Big deal. What we need is to get kids talking to each other, and that means starting up clubs in every school in the country. That's our high-priority program.—KW1O.

OLD FRIENDS

Wayne: Here's a note to bring back some memories of your visit to Aqaba, Jordan.

Our family met your family during one of your many trips overseas. It was my pleasure that you used my rig to make some QSOs from our QTH. I really wished you could have stayed longer, as there were a million questions I thought of asking... after you and your wife had gone.

Anyway, I'm back in the U.S. now, operating as N4JFS instead of the pileup-grabbing JY9CW, and I'm beginning to feel like a small pea in a very large pot—it's terrible being a has-been. How about an uplift, Wayne? It would do me wonders.

Matt Barbani N4JFS/JY9CW
Vienna VA

Of course I remember my visit to Aqaba and getting on the air from your station. And sure, I'll see if I can't get your picture in 73. That should give you some attention on the air. I had a great time at Aqaba—particularly the birthday party you took us to—and the scuba diving in the Gulf of Aqaba with HM's equipment.—Wayne.



Matt Barbani N4JFS/JY9CW.

NEW PRODUCTS

Number 21 on your Feedback card

DIAMOND SYSTEMS HAM TESTS

Diamond Systems has introduced a computerized self-testing study guide for IBM and Apple computers. Separate tests are available for each class of license. The program provides automatic random selection of questions from the appropriate question pool and keeps a running count of the total number of questions answered, the number of wrong answers, and the percentage of correct answers.

The Novice test is \$24.95; all other tests are \$34.95. For more information, please check Reader Service number 206.

TWO NEW ICOM HTs

ICOM has released the 220-MHz counterpart to the popular IC-02AT and IC-04AT hand-helds. The IC-03AT features coverage from 220-224.995 MHz, an LCD display, a DTMF pad, 2.5 Watts rf out, 10 memories, memory scanning, programmable scanning, and 32 built-in subaudible tones. The IT comes with an IC-BP3 rechargeable battery pack, an ac wall charger, a belt clip, and a wrist strap.

The second entry is ICOM's IC-μ2AT pocket-sized 2-meter handheld. The Micro covers 139-174 on receive, and transmits from 140-150 MHz with 1 Watt output (1.5 Watts with an optional battery pack). Other features include ten memories for storing frequency, offset, and access tone informa-



ICOM's new pocket-sized IC-μ2AT.

tion; an LCD display on the top panel; scanning; and 32 built-in subaudible tones.

For more information, please check Reader Service number 213.


JENSEN TOOL KIT

Jensen Tools has introduced a new kit featuring tools for troubleshooting, servicing, and repairing all types of electrical and electronic equipment. Designated the JTK-84, the kit includes screwdrivers, nutdrivers, hex and spline drivers, pliers, cutters, wrenches, a hammer and punches, soldering equipment, and more. The kit is available in a vinyl zipper case or in a vinyl roll-up pouch that fits in a tool case or desk drawer.

For more details on this and other Jensen products, check Reader Service number 210.

KENWOOD R-5000

Kenwood has released information on its new R-5000 HF/VHF general-coverage receiver. The R-5000 looks similar to the TS-440S and features full coverage from 100 kHz to 30 MHz; additional coverage from 108-174 MHz can be had with the optional VC-20 converter. The receiver's 100 memory channels store frequency, mode, and antenna selection information. Other features include Kenwood's DynaMix™ system for a 102-dB dynamic range, dual digital vfo's, direct keyboard frequency entry, a built-in power supply, and dual 24-hour clocks with timers. Accessories include a voice synthesizer, a computer interface, and a variety of filters.

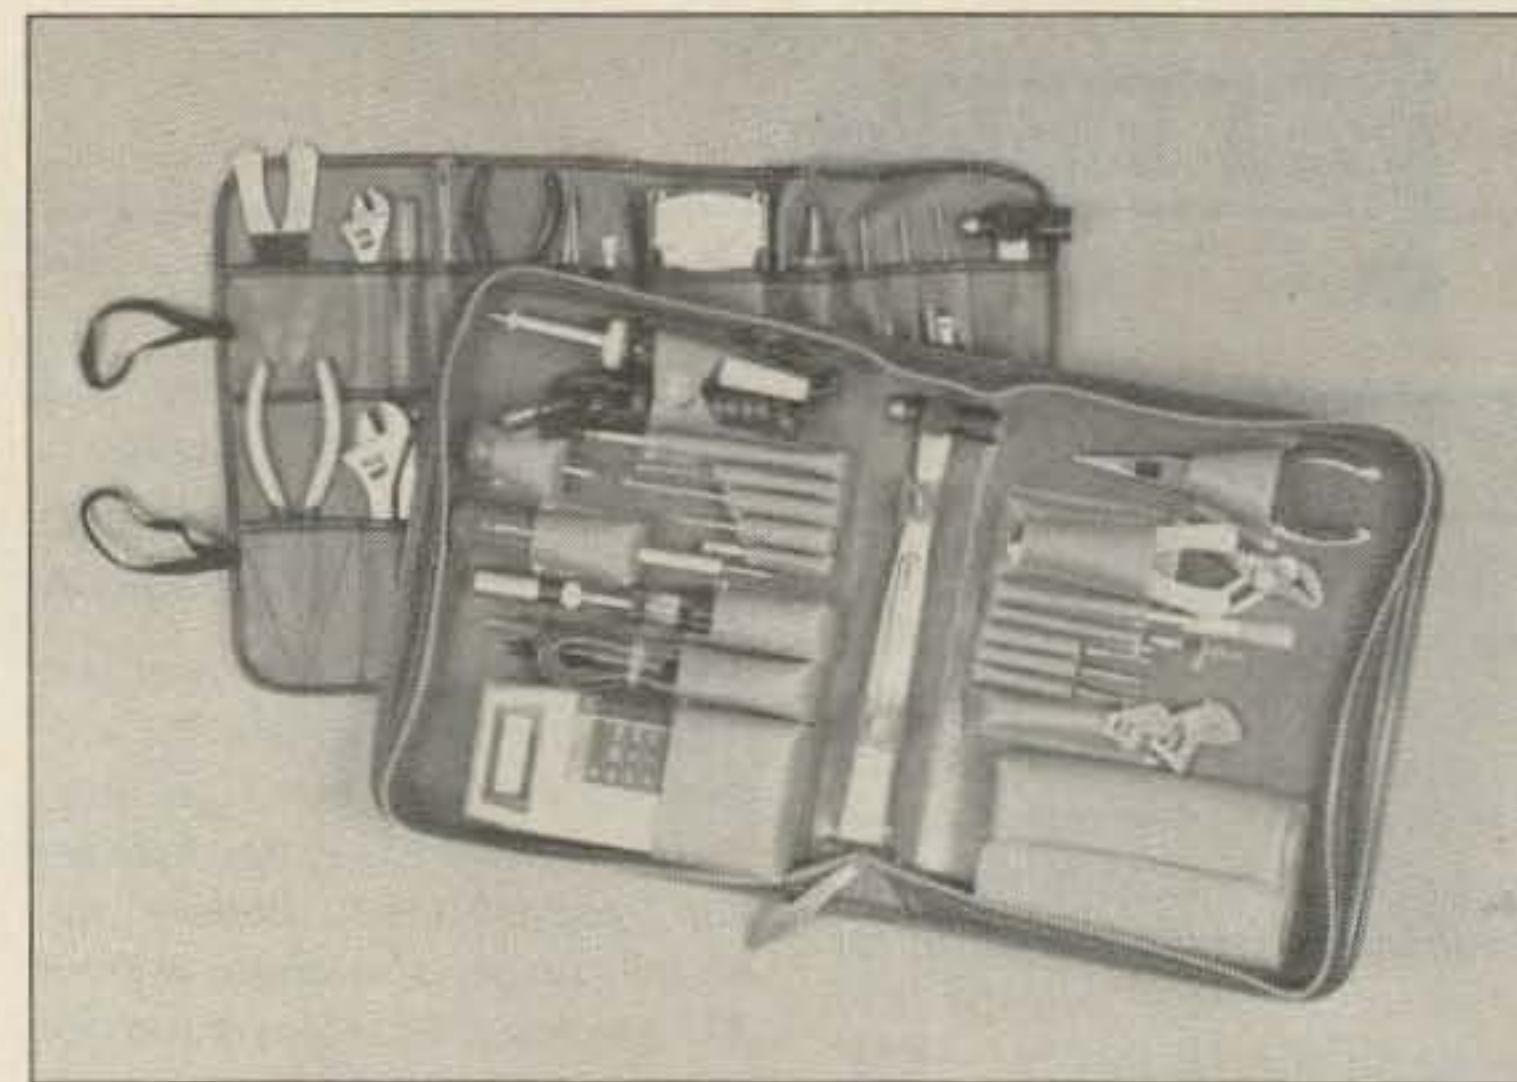

Jensen's JTK-84 tool kit.

For complete specifications, check Reader Service number 207.

TORONTEL SSTV SYSTEM

Torontel Technology Systems Graphics Environment for Slow-Scan Television (GEST) is an icon-oriented software package designed to marry the power of an IBM PC to Robot's 1200C color scan converter. GEST gives the SSTV operator a palette of over 250,000 colors (65,000 colors can be on the screen at any time), animation, image manipulation, image editing with over 20 functions, software signal processing and filtering, and a full 1200C control panel on the computer screen.

For complete information, check Reader Service number 208.

APE MICRO-CLEAN

Automated Production Equipment has announced a complete line of ultrasonic cleaners for the electronics industry. The A.P.E. Micro-Clean is available in sizes from 2 to 11 quarts, with prices

running from \$249 to \$525. The cleaners are also available with custom-fitted covers, baskets, and trays.

For more information, please check Reader Service number 211.

KAUL-TRONICS MESH ANTENNA

A new mesh satellite antenna, ideal for use on patios or other restricted areas, has been introduced by Kaul-Tronics. The Trans-7 is compatible with both C-band and Ku-band systems. Adaptable to either a patio mount or a polar mount, the black mesh antenna has an f/D ratio of .39 and a focal length of 33 inches. Gain is 37 dB on C-band and 43 dB on Ku-band.

For additional information on Kaul-Tronics antennas, check Reader Service number 212.

SCOOTER SURGE PROTECTOR

Ohm/Electronics has introduced its new Scooter™ model SP-100 Guard-It single-outlet



A.P.E. ultrasonic cleaners.



Single-outlet surge protection from Ohm/Electronics.



The Girard Protoflex-III printed-circuit system.

surge protector. This 125-volt, 15-Amp line-protection device plugs into any three-prong wall socket and glows to show that it's protecting your equipment against voltage surges. Use it to protect microcomputers, monitors, VCRs, radio gear, stereos, and so on.

Suggested retail price is \$9.95. For more information, please check Reader Service number 214.

GIRARD PROTOFLEX-III

Girard Electronics now offers a new system for fabricating printed-circuit boards directly from CAD equipment without chemicals. The Protoflex-III model PF-IIIA works from a CAD schematic or line art (film positives or negatives, or patterns from a magazine) and can produce tin-plated copper patterns on a polyimide base at the rate of 75 square inches per hour. The flexible circuit can be laminated onto a double-sided board.

For complete information about the PF-IIIA, please check Reader Service number 209.

DAVLE TECH TOOL CASES

Davle Tech's models TC-11 and TC-15 are rugged, lightweight, vinyl-laminated aluminum tool cases featuring removable tool pallets, aluminum partitions in the bottom, soft handles internally reinforced with steel cable, and a one-year warranty. The TC-11 measures 18" x 12.75" x 5.5", while the TC-15 is 18" x 12.75" x 8". Both models are available with formed polyurethane foam, elastic pallets, or conventional pocket-type pallets.

For more information on these and other Davle-Tech products, check Reader Service number 215.

FREE TOOL CATALOG

A free catalog of tools and test equipment is available from



Free tool catalog from Jensen.

Jensen Tools, Inc. Illustrated in full color, the 160-page catalog contains more than 1,000 items of interest to electronic service technicians, students, and electronics hobbyists.

Two new sections feature supplies and equipment for fiber optics and wire/cable systems. An expanded line of circuit board equipment includes breadboard kits, cutting tools, drill sets, insertion/extraction tools, and test cables.

For your copy of this free catalog, check Reader Service number 217.

KB1T PHOTO CALENDAR

KB1T Radio Specialties has announced availability of the 1987 Amateur Radio Photo Calendar. The 1987 edition is a 32-page spiral-bound book with two pages for each month: A 7" x 10" black-and-white photo of contest action on one page and dates and times for most of the major ham contests on the other.



KB1T's ham radio contest calendar.

There's also plenty of room for jotting notes and keeping track of schedules.

The calendar is \$11.95 plus \$1 for shipping in the U.S.; for more information, check Reader Service number 204.

XCELITE CUTTERS

Static-dissipating sleeves, designed to control electrostatic discharges that could damage sensitive electronic components, have been added to the Xcelite® line of stainless-steel diagonal cutting pliers. Made of Benstat®, the sleeves do not contain carbon elements or other agents that particulate or slough. This makes the cutters ideal for clean-room applications.

The sleeves are available on six models of diagonal cutters (112CGSD-117CGSD); all six meet DoD standard 1686 and DoD Handbook 262 requirements for static-dissipating material.

For more details, please check Reader Service number 216.

ALL BAND DIPOLE TRAP ANTENNAS!

**PRETUNED - ASSEMBLED
ONLY ONE NEAT SMALL
ANTENNA FOR ALL BANDS!
EXCELLENT FOR
APARTMENTS! IMPROVED DESIGN!**

COMPLETE with 90 ft. RG58U-52 ohm feedline, and PL259 connector, insulators, 30 ft. 300 lb. test dacron end supports, center connector with built-in lightning arrester and static discharge. Low SWR over all bands - Tuners usually NOT NEEDED! Can be used as inverted V's - slopes - in attics, on building tops or narrow lots. The ONLY ANTENNA YOU WILL EVER NEED FOR ALL BANDS! NO BALUNS NEEDED!

80-40-20-15-10 - 2 trap - 104 ft. - Model 998 E. \$99.95
40-20-15-10 - 2 trap - 54 ft. - Model 1001 E. \$98.95
20-15-10 meter - 2 trap - 26ft. - Model 1007 E. \$97.95

**SEND FULL PRICE FOR POSTPAID INSURED DEL. IN USA.
(Canada is \$5.00 extra for postage - clerical - customs etc.) or
order using VISA - MASTER CARD - AMER. EXPRESS.
Give number and ex. date. Ph 1-308-236-5333 9AM - 6PM
week days. We ship in 2-3 days. ALL PRICES MAY INCREASE
SAVE - ORDER NOW! All antennas guaranteed for 1 year.
10 day money back trial if returned in new condition! Made in
USA. FREE INFO. AVAILABLE ONLY FROM**

WESTERN ELECTRONICS
Dept. A7 Kearney, Nebraska, 68847

WORLD SSB CHAMPIONSHIP

results and rules

will appear next month.

PACKET RADIO CONNECT-ALARM

This TNC accessory emits a loud beep when another station connects to you.

Mounts entirely inside the TNC!

Quick and simple installation in the TAPR TNC-2, Pac-Com TNC-200, AEA PK-80, and MFJ-1270. Adjustable beep 1-9 seconds.

Complete Kit \$16.89 • Assembled Unit \$22.64
Shipping add \$2.00

SEND S.A.S.E FOR MORE INFORMATION

WATT
engineering

P.O. Box 1848 Goleta, CA 93116

(805) 564-3682-to order
(805) 964-0099-tech info
Visa/Mastercard Accepted

Money back guarantee

✓ 98

Head to Head

220-MHz Rf Power Amplifiers

by Peter H. Putman KT2B

MIRAGE

C22 A

Mirage/KLM, Inc.
16890 Church Street
Morgan Hill CA 95037
Price class: \$105



vs.



ALINCO

ELH-220GF

Alinco Electronics, Inc.
Box 2009
Reno NV 89515
Price class: \$100

Number 11 on your Feedback card

There's no doubt that what makes the 220-MHz band "tick" is the large number of FM operators, especially in metropolitan areas. 220 has become a haven from the congestion and chaos of the 2-meter band in these areas. Surprisingly, though, many operators on 220 possess no more than the bare bones—a 220 hand-held radio with 1 to 3 Watts output.

Quite often you will hear one of these operators using that same HT from his car, breaking in and out of the receiver with that same 1-3-Watt power level. After being informed that his signal just isn't cutting the mustard, the purchase of an intermediate power level amplifier is the next predictable step. For the infrequent user of 220, the investment in an HT and amplifier might total more than a 25-30-Watt mobile radio...but it does offer more flexibility around the station and in the car.

Who makes these amplifiers? There really isn't much of a choice! For the longest time, the only manufacturer of a 25-Watt amplifier for 220 MHz was KLM (now Mirage). The trusty Mirage C22 A (2 W in, 20 W out) has been with us for some time and is a familiar face. I've used one around the shack for about 1 year now for my 220 HTs and have also operated mobile with it on numerous occasions.

But now there's a newcomer to 220 FM. Alinco Corporation of Nevada has introduced the ELH-220GF 20-Watt amplifier with GaAs-

FET preamp and rf-sensed switching, all in an attractive package about 6" x 3" x 1". It is designed to take up to 3 Watts input for as much as 30 Watts output, making it attractive as a mobile or auxiliary base-station amplifier. This also puts it in head-to-head competition with the Mirage C22 A! How do the two units compare in performance? Let's start with the Alinco.

Appearance

The case is attractively designed and the controls easy to use. From left to right, they are: MODE (SSB or FM), RX ON/OFF, and TX ON/OFF. The MODE switch selects the time constant for relay dropout between words on SSB (on FM, it is instantaneous). The other controls are self-explanatory. The rear panel uses a 2-pin connector for dc, as opposed to the Mirage C22 A which has permanently wired power leads. Two SO-239 jacks are provided for input and output connections.

The Mirage unit comes close in size, roughly 6" x 3" x 2". It also has three controls on the front—POWER ON/OFF, SSB/FM, and PREAMP ON/OFF. These function the same as their counterparts on the Alinco. Again, two standard SO-239 jacks are employed for input and output connections.

One comment worth noting here: I much prefer the conventional four-hole flange type SO-239 used on the Mirage rather than the single hole threaded type used on the Alinco.


Why? Repeated connecting and disconnecting of the cables to the Alinco can cause the nut holding the connector to come loose and it might rotate in the hole. Use of the flange type connector by Mirage eliminates that possible problem.

Both units employ LED indicators to show that the receive preamp is on. The only other LED on the Mirage indicates that 13.8 V dc is present. The Alinco shows this as well but also provides LED indication when actually it is in the transmit mode. Amplifiers are frequently under a seat or in the trunk, so it's a moot point.


Performance Tests

Now on to the hard numbers. Both units were tested with the usual Hewlett-Packard 8640 RF Signal Generator and 8554 Spectrum Analyzer combination. Table 1 shows transmit linearity—that is, what level of output you could expect for a given input level. Both amplifiers nominally operate at about 10 dB of gain for a given input signal, and the results seem to reflect just that. The Mirage appeared to saturate at about 22 Watts output, while the Alinco reached saturation at 32 Watts output. (Final stages in each amplifier are: Mirage—MRF204A; Alinco—2SC2540.)

Both amplifiers compress (1-dB compression point) at about 2 Watts input. Gain falls off after this drive level on both amplifiers, but the Mirage falls off abruptly, while the Alinco con-

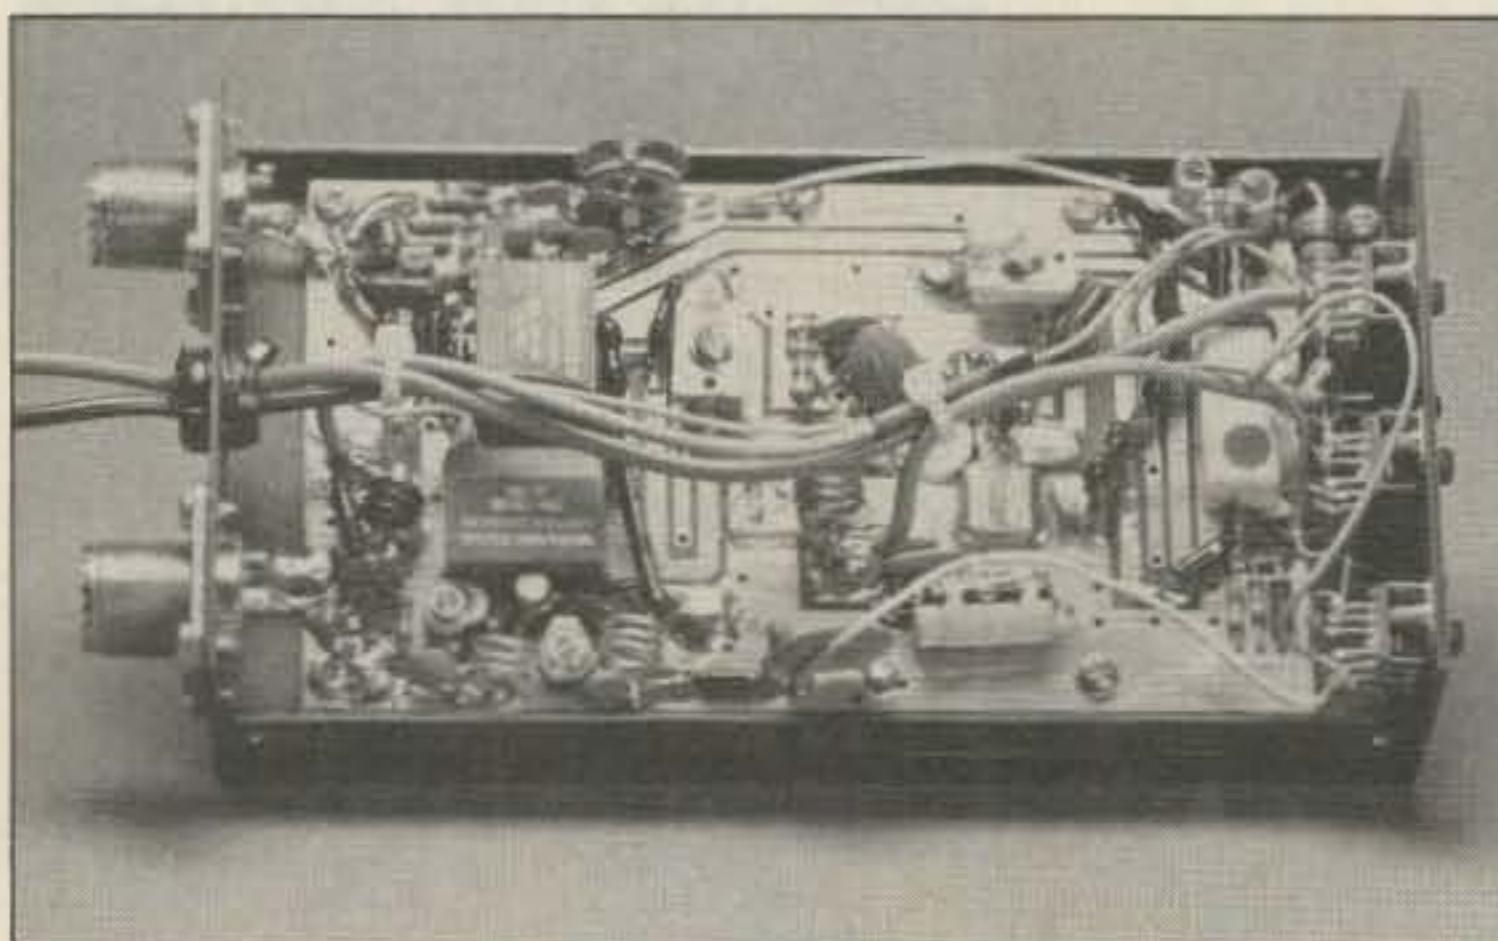

Interior view of the Mirage C22 A.

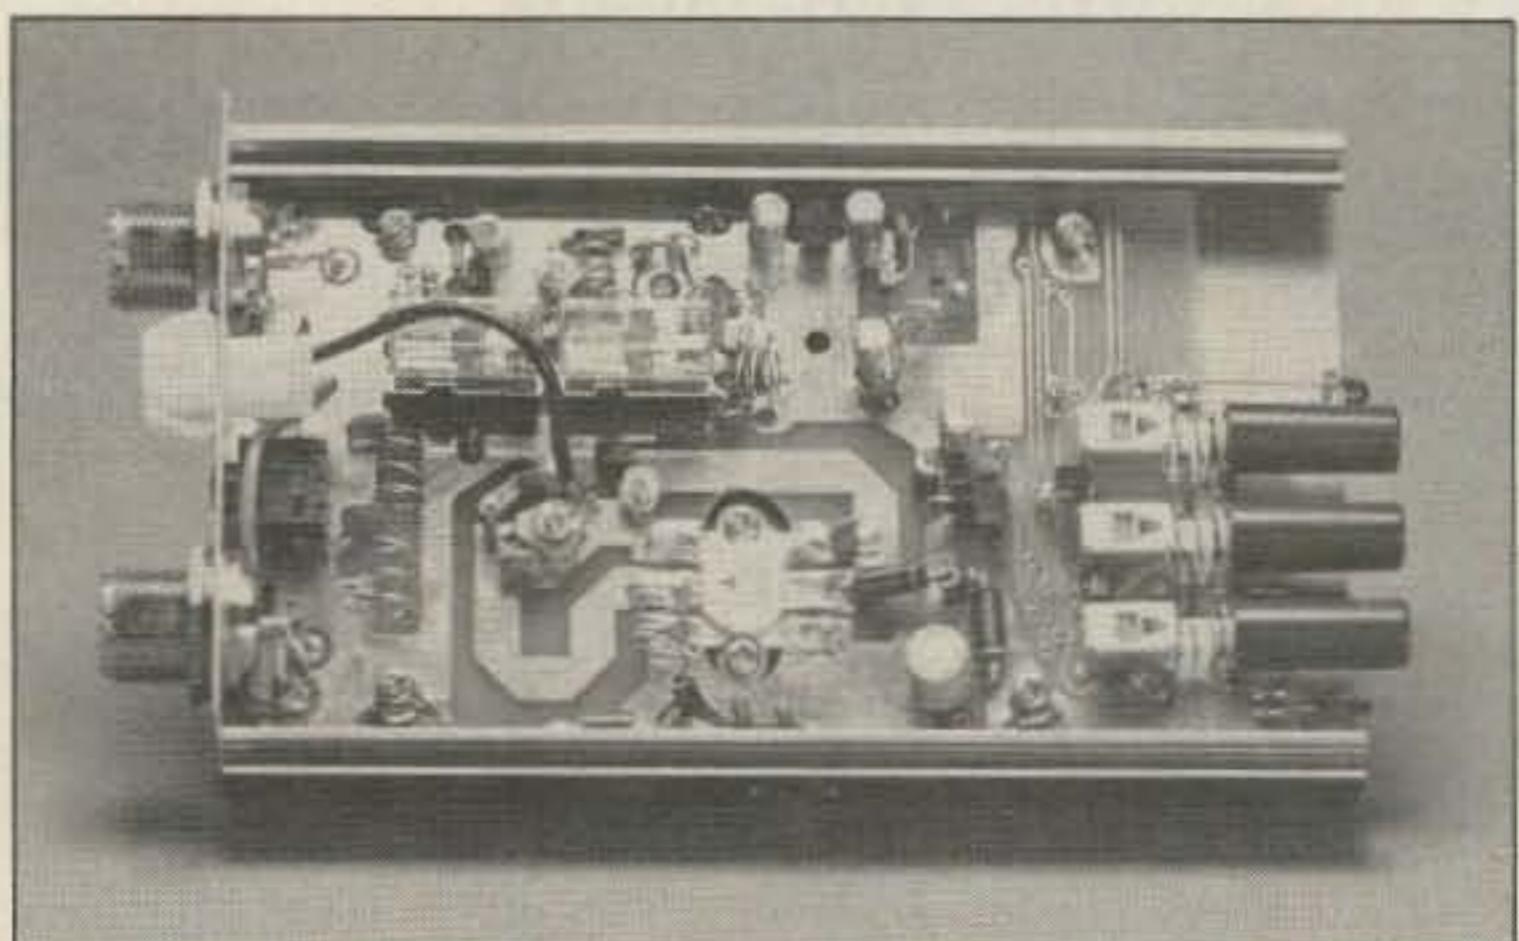

Interior view of the Alinco ELH-220GF.

Input Level	Alinco Output Power (W)	Mirage Output Power (W)
50 mW	1	1
100 mW	2	2
150 mW	2.5	3
200 mW	3	4
250 mW	4	4.5
300 mW	4.5	5.0
350 mW	5	5.5
400 mW	5.5	6
450 mW	6	6.5
500 mW	6.5	7
550 mW	7	7.5
600 mW	7.5	8
700 mW	8	9
800 mW	9	9.5
850 mW	9.5	10
950 mW	10	12.5
1 W	12	13
1.2 W	14	15
1.5 W	16	17.5
1.7 W	18	18.5
2.0 W	20	21
2.6 W	24	22
3.2 W	26	
4.0 W	28	
5.5 W	30	

Table 1. Input power vs. output power comparisons. The Mirage unit reached saturation at 22 W out. The Alinco unit reached saturation at 32 W out.

tinues to provide almost 10 more Watts of usable output. Overdriving the Mirage results in no additional output but current consumption continues to rise (?).

Spectral purity is comparable in both units, and they meet FCC specifications regarding spurious and third-order harmonics. As far as current consumption is concerned, the Alinco is more efficient—it draws but 3.1 Amps at 20 Watts output; the Mirage requires 4.7 Amps to deliver the same power output.

Since both units employ COR circuits for rf-sensed keying, a logical number to measure is COR sensitivity—otherwise known as the lowest level input signal required to “trip” the COR circuit and put the amplifier in line. Here the Mirage wins out, for it required less than 50 milliwatts of rf to switch on. The Alinco is a bit more insensitive and needs about 100 milliwatts. However, either level is easily below the typical “low power” setting on the average hand-held.

On to the preamplifiers! One gripe I've had in the past with outboard power amplifiers is the poor performance of the preamplifiers that come with them. (So far, the best I've seen have been the Microwave Modules preamps using GaAsFETs and high-performance MOSFETs.) Table 2 shows how the two preamps stack up against each other. Note that while we are sort of comparing apples and oranges—each preamp uses a different type of device, GaAsFET vs. MOSFET—the results are surprisingly similar!

The GaAsFET in the Alinco measured out at 10 dB gain up to an input level of -4.5 dBm, at

	Alinco ELH-220GF	Mirage C22 A
Gain	10 dB	9 dB
1-dB Compression Point	+4.5 dBm	+10 dBm
Minimum Discernible Signal in 1-kHz Bandwidth	-122.1 dBm	-120 dBm

Table 2. Here's how the two preamps stack up against each other.

which point the output started to drop off. This number (called the 1-dB compression point) would be considered fair for a GaAsFET. (A 1-dB compression point of 0 dBm would be good, and above that excellent.) The MOSFET in the Mirage measured out to 9 dB of gain up to an input level of +1 dBm—much better performance.

What does this mean to the average user? With a higher 1-dB compression point, the preamp exhibits better linearity and less tendency to compress and “crunch-up” in the presence of a strong signal. Such compression can result in the generation of secondary and tertiary spurious signals as well as mixing products at the preamplifier's output. In this case, it would be less of a problem with the Mirage when operating in the presence of a very strong adjacent channel signal.

Both preamplifiers exhibited better than average sensitivity. The Mirage was able to resolve a signal of -120 dBm in a 1-kHz bandwidth measured on the spectrum analyzer. The Alinco did slightly better, resolving a level of -122.1 dBm in a 1-kHz bandwidth. With these numbers, I wonder why Alinco bothered with the GaAsFET, as a well-designed MOSFET would have done as well.

Operating Impressions

Both units were tested in my Honda Civic over a one-week period, using a direct connection to the battery through #12 wires. The driving sources were alternately a Kenwood TH-31AT and an ICOM IC-3AT. In all cases the antenna used was a Larsen 220-MHz magnetic-mount 5/8-wave gain antenna.

One problem that both units exhibited occurred when the TX power was on and the RX switch (preamp) off, as I transmitted on 2 meters using my Kenwood TR-7400A. The COR relays chattered furiously in the presence of high rf power (25–30 Watts). Why this happened, I have no idea. Possibly rf was

picked up from the 2-meter antenna's coax and coupled into the dc power leads of the amplifiers.

Both the Mirage and Alinco performed reliably. In many cases, the preamps proved to be a boon, as 220-MHz propagation changes can be quite abrupt, resulting in rapid picket-fencing on weak signals. The preamps alleviate this to a great deal, and don't appear to exceed the transmit coverage. In all cases I employed FM mode, so the keying was always solid. I tested both units off the bench with a low-level SSB signal using delayed drop-out keying, but still prefer hard keying in SSB or CW mode. Neither amplifier offers this option, though.


The two units are so small you can tuck 'em away almost anywhere—real important in the smaller imported cars. If you choose to use them while mobile, I'd suggest making up a pigtail out of RG-8/X from your HT to the amplifier, and use a 90° BNC connector on the HT to allow the cable to swivel, reducing strain on it. Avoid 1/4-wave or multiples thereof in the length; aim for 1/2- or full-wave multiples. Although both amplifiers exhibited a good impedance match at the input (better than 1.3:1), it can't hurt and might squeeze a few more Watts out.

Drumroll

Now—the envelope please. And the winner is... Alinco, but by the slimmest of margins. It all came down to this: The Alinco could be driven with up to 5 Watts and delivered 30+ Watts for the effort, while the Mirage mysteriously leveled off above 2 Watts drive. While the Mirage had the better preamp, the ultimate criterion for making the decision is how well the amplifier amplifies. In almost every other department the two units came up almost even.

Reader Service numbers: Mirage 201; Alinco 202. ■

ELI'S AMATEUR RADIO OPEN 7 DAYS YOUR COMPLETE HAM RADIO STORE



CALL OR VISIT OUR CONSIGNMENT DEPT
FINEST SELECTION OF PERIODICALS
AND BOOKS IN SOUTH FLORIDA

SE HABLA
ESPAÑOL

ICOM
KENWOOD
YAESU

1351 State Road 84

Fort Lauderdale, Florida 33315

Exit-27 on I-95, then go 8/10 Mile East

DISCOUNT FOR CASH

BROWARD 305-525-0103

✓137

DADE 305-944-3383

Dick Smith 100-Watt VHF Amplifier Kit



by Allan J. Perrins WB6PHE

Dick Smith Electronics
PO Box 8021
Redwood City CA 94063
Price class: \$150

Number 12 on your Feedback card

Sometimes a little more power is all that you need to access a distant repeater or to make that DX contact. How about a lot more power—say 110 Watts or so for 10 Watts in? Need more mobile power with your hand-held? Would 43 Watts out for 2 Watts in make a difference? If you're willing to save a few bucks by spending a few hours with a soldering iron, the Dick Smith 100-Watt VHF amp kit will definitely fill the bill.

Appearance

The completed unit looks very professional. In fact, the only external giveaway that it is a kit will be the lack of pop-rivets holding the case together! All case parts are black anodized, as is the large heat sink (the photos are of a prototype, which had aluminum panels). Front and rear panels are silk-screened with control and connector nomenclature. Rubber feet are provided for base-station use, but as usual with amplifiers, no provision for mobile mounting is made. Fortunately, no parts mount to the bottom of the case and it may be drilled for mobile use. UHF connectors are provided for transceiver and antenna connection.

Circuit Analysis

As with most power amplifiers, there really isn't too much stuff in the box. The heart of the unit is a pair of Mitsubishi 2SC2694 transistors, each rated at 75 Watts. T-R switching is handled by a pair of low-loss coax-

ial relays, accounting for the low 0.6-dB insertion loss in receive. There is a third relay used to switch power on and off to the power transistors and to the "on air" light. In this way, current consumption during receive is held to about 50 mA, primarily because of the meter lamp. In the SSB/CW mode, the amp stays "on" for a short time after carrier sensing drops out due to the nature of SSB and CW transmissions.

Construction

As in many of the Dick Smith kits, the manual is a reprint of an *Electronics Australia* article. This one was run in March, 1986. Be prepared to read it several times and to translate it from Australian to "American." It is, however, unfair to compare the Dick Smith kits with the ones from our old friends at Benton Harbor. If you consider the Dick Smith offerings as "projects" instead of kits, the level of documentation becomes more tolerable. It is assumed that the builder has some knowledge of rf circuitry and construction practices.

The lay ham should have no trouble with this kit/project, however, as the manual/article contains all the necessary information if you're willing to dig. For instance, page 4 of the manual/article directs you to cut the supplied brass shim stock into specified strips and fit it to the PC board "as shown in Fig. 2." I'm sorry, but if you've never built a power amp before, it doesn't make any sense. But if you

refer to Fig. 9 on page 7, the fitting of this shim stock becomes clear—it ties the top and bottom ground plane of the PC board together right at the rf transistors.

This hurdle passed, the remaining construction is pretty garden variety. Be sure to refer to Fig. 5 for proper orientation of the variable caps, as the adjustment screws will have high rf voltage if they are installed backwards. You'll have to wind a few coils—no sweat, make them just as they appear in Fig. 7 and you won't go wrong. Remember, the dimensions are in millimeters! Instead of gluing the meter to the front panel, you could fashion "brackets" made of stiff wire soldered to the inside of the front panel. Fortunately, there are lots of good photographs to assist the builder in case of confusion.

Alignment

If you don't have the specified equipment, beg, borrow, or steal it! You run a real risk of blowing up the rf devices if you try to "wing it." The preferred test setup would be a vswr bridge between the radio and amp and a wattmeter on the amp output terminated in a proper load. An antenna is not a proper load! Assuming the unit was constructed properly, follow the instructions and you should be on the air in 15 minutes or less.


Summary

There is enough room in the case for a receive preamp, but with a measured 0.6-dB insertion loss, I felt that I didn't need it. The heat sink gets warm during prolonged operation, but the power output automatically shuts back as the temperature goes up as a protection measure. Make sure that your load is properly matched, as high vswr will only make the amp run hotter and shorten the life of your rf transistors. If you run the amp mobile, be sure to use heavy cable—the current draw is substantial.

For about a buck and a half a Watt, it's a lot of amp for the money. Besides, if it ever goes out, you'll be able to fix it yourself! ■

MICROWAVE MODULES TRANSVERTERS	
MMT1296/144G	1296-1298MHz, 144if, 2w.GAASFET
MMT432/28-S	432-437MHz, 28if, 10w
MMT220/28-S	220-225MHz, 28if, 10w
MMT144/28-R	144-146MHz, 28if, 25w, DBM
GAASFET	\$339
MMT50/28-R	50-54MHz, 28if, 20w, high performance
	\$349
SSB ELECTRONIC TRANSVERTERS & PREAMPS	
LT23S	1296-1298MHz, 144if, 10w, GAASFET
LT33S	902-904MHz, 144if, 10w, GAASFET
MICROLINE 13	2304-2306MHz, 144if, 0.5w, GAASFET
DX144S-01	144-146MHz, 0.4db nf, 25db gain
DX432S-01	430-440MHz, 0.3db nf, 20db gain
DX1296S	1250-1300MHz, 0.5db nf, 23db gain
DX230S	2300-2340MHz, 0.8db nf, 16db gain
MV144S-01	144-148MHz, 0.5db nf, 25db gain
MV432S-01	430-440MHz, 0.7db nf, 25db gain
MV1296-S	1250-1300MHz, 1.0db nf, 16db gain
DCW15A	Sequencer for MV preamps
PA2310	1296MHz, 10w solid state PA
PM1300A	Terminating watt meter (20mw-20W)
NEW	10 GHZ Transverter
	\$499
EME ELECTRONIC	
HF 400	High power relay, 144 2kw, 432 1kw
PA23150	1296MHz, 2 tube PA, 150 + W
PA1325	2304MHz, 1tube PA, 25 + W
WATTMETER	432, 1296, 2304 MHz
PA23200	1296MHz, 2 tube PA, 200 + W, water coolers
WJ10	Water coolers for 2C39, 7289, 3CX100, etc.
	\$119
	\$369
	\$349
	\$279
	\$279
	\$275
	\$10
TRANSVERTERS UNLIMITED	
BOX 6286 Station A	HANS PETERS (VE3CRU)
TORONTO, ONTARIO	(416) 759-5562
CANADA M5W 1P3	EVENINGS

✓ 135

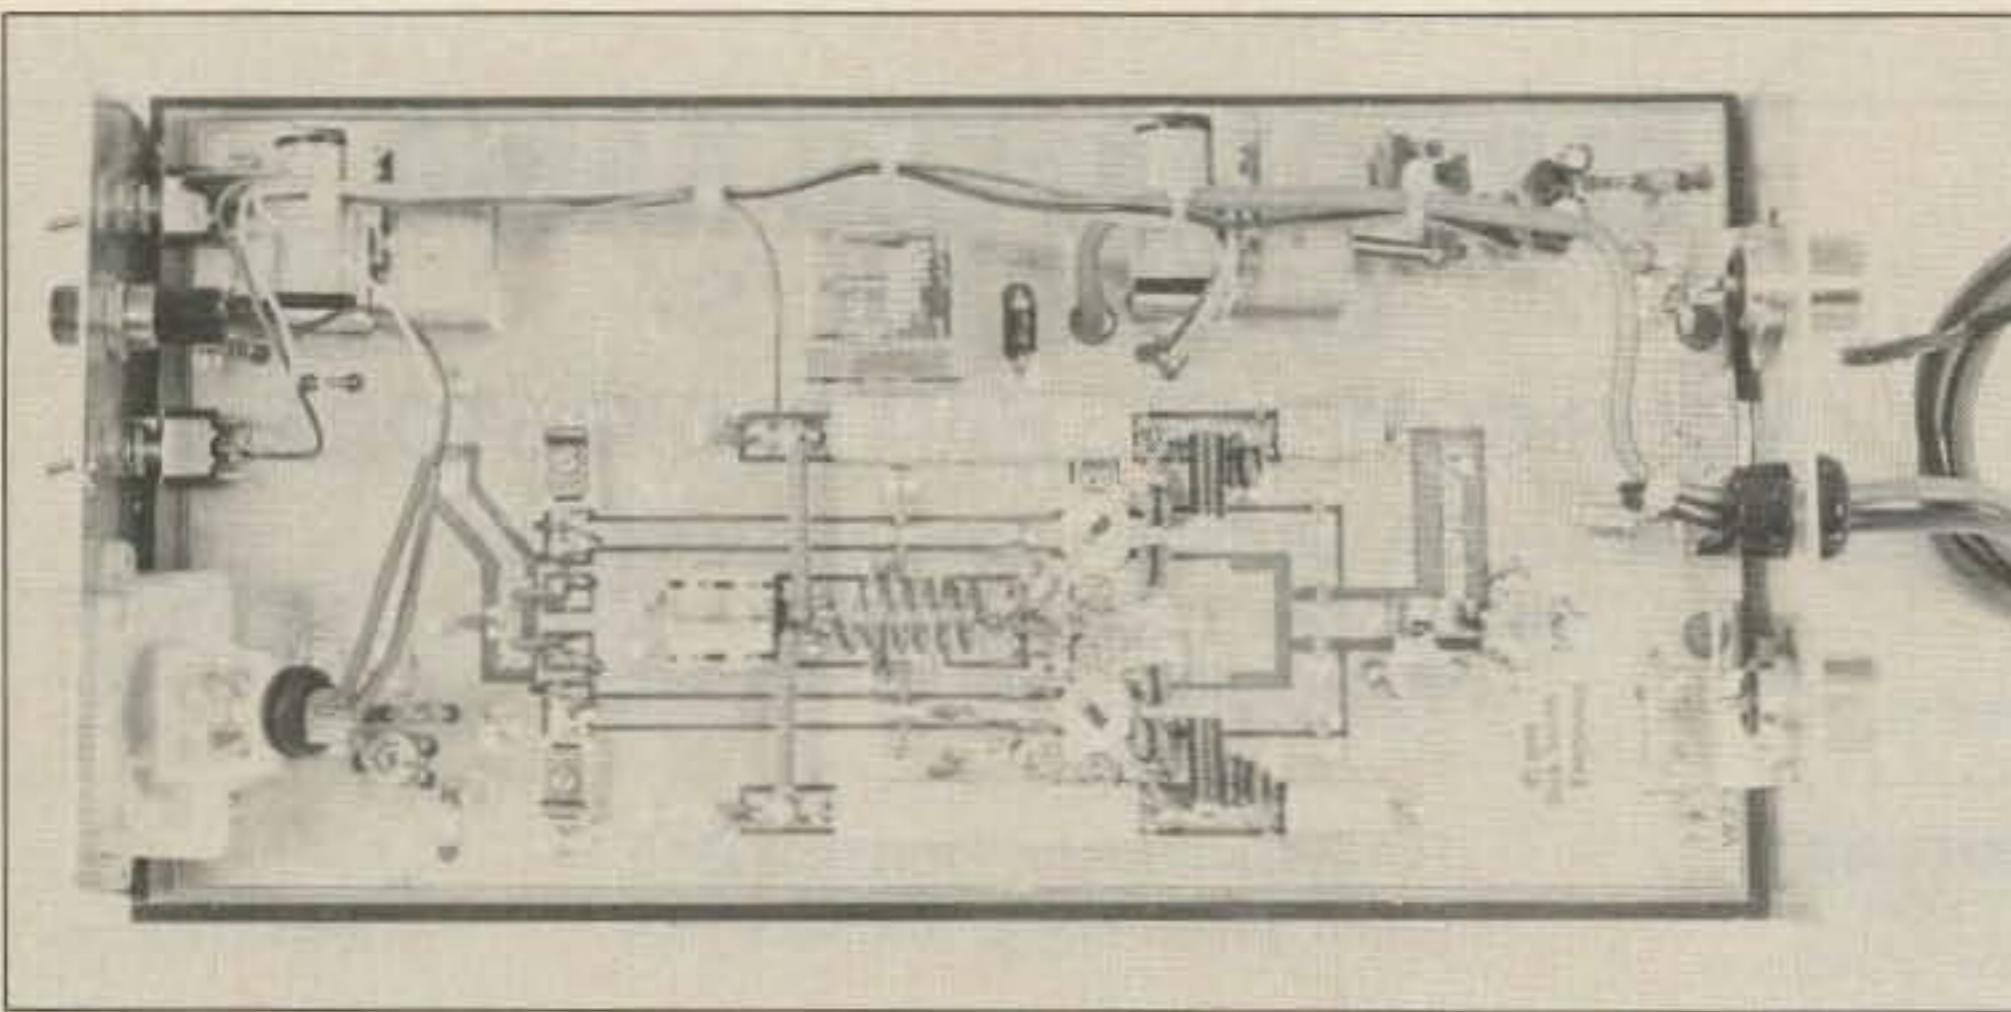


A look inside the DSE 100-Watt VHF amplifier.



P.C. ELECTRONICS 2522 S. PAXSON LN. ARCADIA CA 91006 (818) 447-4565
TOM W6ORG MARYANN WB6YSS Compuserve 72405,1207

v28



AMATEUR TELEVISION

ATV MADE EASY WITH OUR SMALL ALL IN ONE BOX TC70-1 TRANSCEIVER AT A SUPER LOW \$299 DELIVERED PRICE.

TC70-1 FEATURES:

- 10 pin VHS color camera and RCA phono jack video inputs.
- Crystal locked 4.5 mHz sound subcarrier.
- PTL (Push To Look) T/R switching.
- Sensitive UHF GaAsfet tuneable downconverter.
- Two frequency 1 watt pep xmtr. 1 crystal included.
- Xmit video monitor outputs to camera and phono jack.
- Small 7 x 7 x 2.5" for portable, mobile, or base.
- Draws only 500 ma (exc. camera) at 13.8 vdc.

Just plug in your camera, VCR, or computer composite video and audio, 70 cm antenna, 12 to 14 vdc, and you are ready to transmit live action color or black and white pictures. Sensitive downconverter tunes the whole 420-450 mHz band down to channel 3 on your TV set to receive. Both video carrier and sound subcarrier are crystal controlled. Specify 439.25, 434.0, or 426.25 mHz. Extra crystal \$15.

WHAT ELSE DOES IT TAKE TO GET ON ATV?

Any tech class or higher amateur can get on ATV. If you already have a source of video and a TV, it costs about the same as getting on 2 meters. Now you can be seen as well as heard.

DX with TC70-1s and KLM 440-27 antennas line of sight and snow free is about 22 miles, 7 miles with the 440-6 for portable use such as parades, races, search and rescue, etc. You can add one of the two ATV engineered linear amps listed below for greater DX.

At 70 cm, antenna height and gain is all important. Foliage can absorb much of the power. Also low loss tight braided coax such as the Saxton 8285 must be used along with type N connectors.

The TC70-1 has full bandwidth for color, sound, and computer graphics. You can now show the shack, computer programs, home video tapes and movies, repeat SSTV or even space shuttle video if you have a Home Satellite Receiver.


PURCHASE AN AMP WITH THE TC70-1 & SAVE!

20 WATT WITH ELH-730G....\$412


50 WATT WITH D24N-ATV....\$499

All prices include UPS surface shipping in cont. USA


ACCESSORIES:

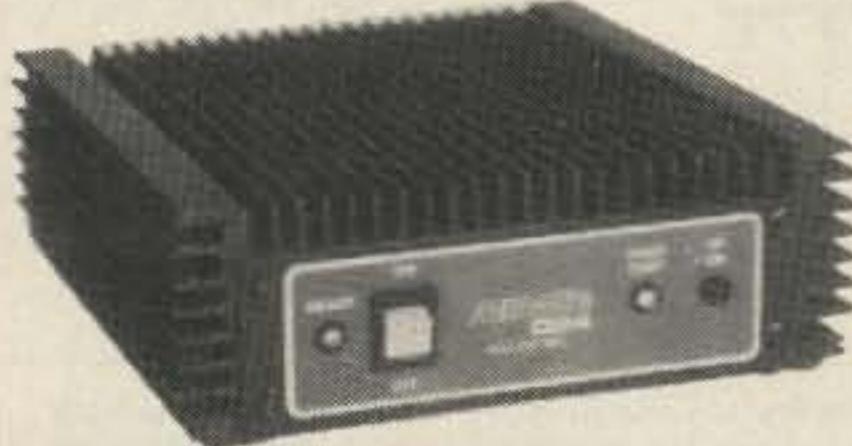

MIRAGE D24N-ATV 50 WPEP AMP...\$219
ATV, FM, SSB. 1 W IN. 13.8VDC @ 9A

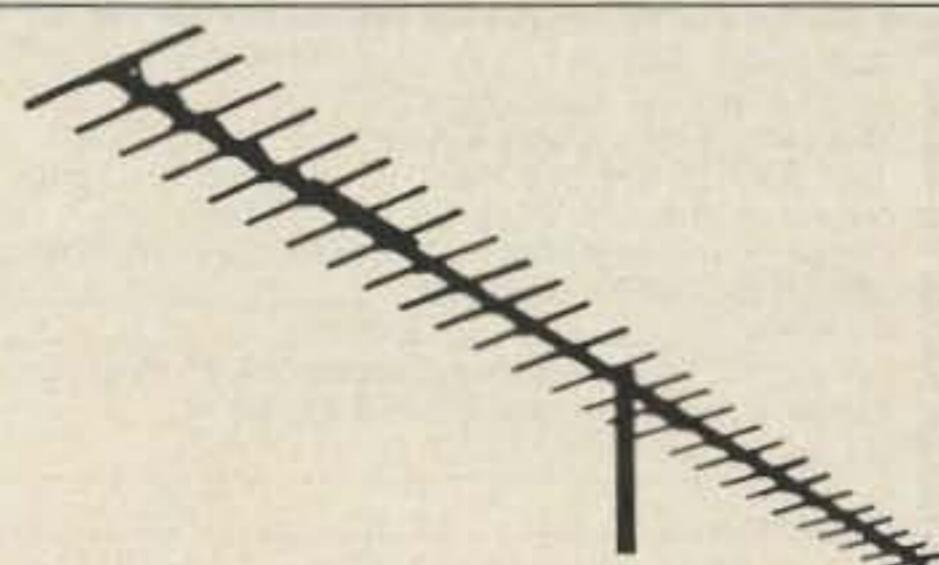

KLM 440-27 14DBD ANT...\$107
KLM 440-14 11DBD ANT.....\$77
KLM 440-6 8DBD ANT.....\$62

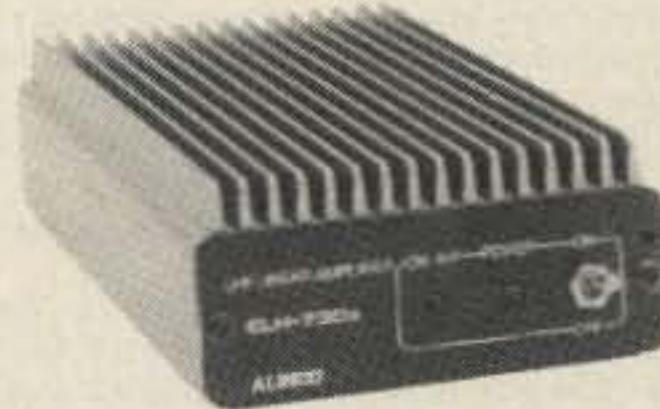

ALINCO ELH-730G 20 WPEP AMP....\$129
ATV, FM, SSB. 1W IN. 13.8VDC @ 4.5A

HAMS! Call or write for full line ATV Catalog.

7/86

Heath IP-2760 Battery Eliminator

Heath Company

Dept. 011-442

Benton Harbor MI 49022

Price class: \$180

Number 13 on your Feedback card

by Perry Donham KW1O

One accessory that you'll find in every ham's shack is a power supply. Some are fancy with cases to match a particular transceiver, others are general-purpose units in military-looking boxes, and there's always the home-brewed job with the 40-pound surplus transformer.

I needed a reliable 12-volt supply that could handle 10-15 Amps, and decided to try Heath's IP-2760 Battery Eliminator. The IP-2760 will run at 12 Amps forever and can deliver up to 20 Amps on peaks—perfect for my HF station.

The Circuit

As power supplies go, the IP-2760 is pretty simple. A full-wave bridge rectifier is followed by 20,000 microfarads of capacitance; voltage is then passed to an LM-317 monolithic regulator. Four hefty pass transistors provide the current-handling capability. The LM-317 is an adjustable regulator and is set up in this circuit to deliver 8-15 volts with less than a 2% drop in voltage when a load is applied. Output ripple is held to under 1%.

Two front-panel meters are provided to monitor output voltage and current. In addition to the on/off switch, a standby/operate toggle is included—handy if you want to use the supply for testing. Two color-coded banana jacks connect the unit to the rest of the world. The case is Heathkit blue with a white face, and two handles on the top make this a "portable" power supply (it weighs about 20 pounds).

Construction

It took about five hours to put the IP-2760 together. Most of the time was spent stripping wire and building the .09-Ohm, 20-Watt resistors for the pass transistors (four sets of four .33-Ohm, 5-Watt ceramic resistors wired together on two long terminal strips). As usual, there was plenty of material supplied in the kit, with quite a bit of wire left over.

"I ended up glad for the minute detail when it came time to really start hooking things up."

The remainder of the five hours was spent trying to get the little plastic strain relief for the power cord to fit into an even littler hole on the back panel. Now, I've seen these things go right in with no sweat, but it was always somebody else doing the work. I have never been able to get the buggers in without completely destroying them. And the manual just mocks me: "Place the line cord in the slot. Squeeze the two segments together. Insert the rear half into the hole." *As if it were that simple!*

Everything else went smoothly, although be very careful when you handle the finned heat sinks which attach to the sides of the chassis. They are very sharp. All of the transistors are socketed, and a generous amount of thermal

compound is included. I was a bit concerned about the plastic covers used on the transistors, but they seem not to be harmed when the supply is running full out.

During construction, I kept wondering whether or not I could go faster if I just ignored the step-by-step instructions. Especially with a project this simple, all of the "Connect one end of the 12" black wire to Q6 lug C" instructions tend to get tedious. I stuck with it, though, and ended up glad for the minute detail when it came time to really start hooking things up. Wires that had been cut to a specific length were (of course) just the right size to reach to tab C, and everything fit perfectly.

I did, however, end up ignoring the instructions regarding bending wires. In many cases a wire is to be bent to a particular shape to make it from one connection to the next; I found that I couldn't manage to pre-bend the wire and have it fit. It was no big deal, I just bent one end and then measured the distance by holding it up to the circuit.

I also was a bit put off by instructions that had you solder a wire into place on one end and then remove an additional amount of insulation from the other end. This places unnecessary stress on the solder joint, so I simply stripped the wire before it was soldered.

Summary

I've built several Heath kits in my years as a ham, starting with an HW-16. They always work. The IP-2760 started right up, and the measured voltage matched the published specifications. It costs a bit more than most power supplies in its category, but I think that the pleasure of putting it together and the ability to repair it yourself are well worth the additional cost. I think that you'll find the IP-2760 a useful addition to the shack, whether you use it as a dedicated power supply or a test-bench voltage source. ■

NEW!

The **AZIMUTH**
World Time Dual-Zone
24 Hour Station/
Travel/Alarm Clock

SPECIAL
INTRODUCTORY
OFFER!
\$19.95
SAVES YOU \$10.00
Plus P&H



REGULAR \$29.95 RETAIL VALUE

SEE DUAL-ZONES! FINDS "GREY LINE"
WORLDWIDE—TOO!

Displays LOCAL plus 24 Cities/Zones around the world. Set to LONDON for GMT/Universal for easy QSO logging. Both displays show 24-Hour Zulu. Compensates for Int'l. Date Line world-wide + or — from local date. Special Summer/Daylight Savings Time switch memorizes changes Zone by Zone.

LEGENDARY QUARTZ ACCURACY—ALARM &
STANDARD BATTERIES

Ingenious new quartz digital design runs on one oscillator. Long life AAA batteries included. Excellent accuracy important in ham radio. Compact size (2" x 4.5" x .5"). Great for your station. DXpeditions or travel. Sharp, easy to read digits. Set alarm for schedules. Folding easel stand. Black leather-like travel pouch.

Take Advantage of Our Special Low Introductory Price! Today! Thousands of Azimuth Clocks in use world-wide!

Mall To: AZIMUTH CLOCK, 11030 Santa Monica Blvd., Suite 100, Los Angeles, CA 90025, Dept. A1100

YES! Please rush me _____ Azimuth World Time 24-Hour Clock(s) at \$19.95 plus \$1.95 Shipping & Handling. Order 2 & SAVE \$3.90. Just \$39.90 we pay P&H. (California residents please add 6.5% Sales Tax). Enclosed is my check or money order. Or CHARGE my VISA or MASTERCARD • Account _____ InterBank _____ Expires _____ Foreign Orders—Please include \$4.95 Postage & Handling each clock (US \$ Only).

Print Name _____

Address _____ Apt _____

City _____ State _____ ZIP _____

Call _____ Day Tel _____

For QUICK TOLL-FREE CREDIT CARD
ORDERS CALL TOLL FREE 1-800-421-6842
Natl / 1-800-421-1061 Calif. CUSTOMER
SERVICE ONLY (213) 473-1332. CALL TODAY!
14-Day TRIAL SATISFACTION OR YOUR
MONEY BACK!

**LASER PRINTED
QSLs**
Top Quality - Low prices
Write for Information
THE LASER PRESS
P.O. BOX 876
MOUNDSVILLE WV 26041

PORTAQUADS
2-MTR. & 220 MHz
FOLDS INTO CASE CA ADD
SPECIFY BAND \$73.95 6% TAX
RADIO ENGINEERS
3941 MT. BRUNDAGE AVE.
SAN DIEGO CA. 92111
(619) 268-7988


Be the first to know precisely when and where to work all the choice DX. Bi-weekly *LI DX Bulletin* has hot DX news, time and frequency of each goodie, QSL info, propagation forecast, and more. Send business-size SASE for free sample or \$15 for one-year domestic subscription to:

Long Island DX Bulletin
PO Box 173, Huntington NY 11743

NEW!

PAC-COMM TNC-220

**\$124.95
KIT**

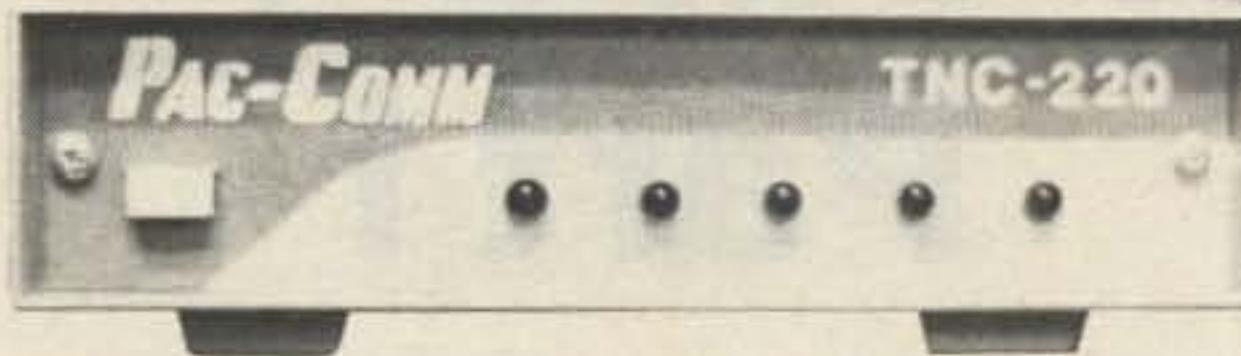

**\$159.95
ASSEMBLED**

The TNC-220 is a newly designed successor to the TNC-200 and other TNC-2 "clones", giving more features at lower cost. It uses a single-chip modem that is software switchable between two radio ports, conveniently supporting both VHF and HF packet operation. Each of the TNC-220 radio ports may be configured with jumpers for 300 or 1200 bauds. Switching between ports is entirely done in software and no cable changing, no switch setting and no retuning is required! Both ports have provision for an active bandpass filter to optimize HF operation, one filter is standard. An optional tuning indicator will mount inside the cabinet. A standard modem disconnect header is provided to allow the use of accessory high-speed or satellite modems.

- Two radio ports
- 7910 single-chip modem
- 300 and 1200 bauds
- Enhanced command set
- Multi-color status LED's
- Supports RS-232 and TTL computers
- Active HF bandpass filter
- Tuning indicator option
- 12 volt DC operation
- Premium quality case
- 6" w x 2" h x 7" d

An assembled TNC-220 includes radio and power connectors, complete operator's manual and command reference card. The kit also contains a detailed, step-by-step assembly manual. And, of course, the quality and support you expect from the "Specialists in Packet Radio".

The TNC-220 has the familiar TAPR command set and AX.25 Level 2 Version 2 protocol running on a Z-80 processor with 32k bytes of EPROM and 16k bytes of battery-backed RAM. A Zilog 8530 Serial Communications Controller performs all packet HDLC in hardware. The RS-232 port includes a jumper to select TTL interfacing to your VIC-20, C-64/128 or other TTL computer. Five large, color-coded LED's clearly indicate the TNC-220 status at a glance. The power switch is located on the front panel. TNC-220 is enclosed in a rugged extruded aluminum cabinet. The attractive Pac-Comm two-tone blue front panel has large, clear labels on all indicators and controls.

SINGLE AND DUAL-PORT DIGIPEATERS.

The Pac-Comm DR-100 and DR-200 are packet radio digipeater controllers which have been especially designed for dedicated repeater service. The DR-100 provides single-port controller capability at low cost. It is well-suited to any application where a single-frequency digipeater is required.

The DR-200 is a dual-port controller, capable of digipeating on two separate frequencies and able to switch packets between ports. It is a basic network building block.

TECH LINE
(813) 874-2980

SOFTWARE OPTIONS

- DR-100 Single-Port Software
 - AX.25 Level 2 Digipeater
 - AX.25 Level 3 Switch
- DR-200 Dual-Port Software
 - AX.25 Level 3 Switch
 - KE3Z Dual-Port Digipeater
 - Southern California Dual-Port
 - Internet Protocol (TCP/IP)

Amateur Net Price Schedule

	Kit	Assembled
DR-100	\$ 84.95	\$ 99.95
DR-200	\$139.95	\$159.95

Both digipeaters use a Z-80 processor which has up to 32k bytes of EPROM and two JEDEC sockets for 2/8/16/32k bytes of battery-backed RAM. A Z80-CTC is provided in the DR-200 for dual-port scheduling/interrupts. Packet HDLC operations are handled in hardware by a Zilog 8530 SCC. Both use the AMD 7910 LSI modem chip. Each modem channel has a standard disconnect header and time-out timer. The CPU itself has a hardware watchdog timer and external hard reset line. The circuit board is RFI shielded by our extruded aluminum case. All connections are soldered to feedthroughs.

ORDER DIRECT 800-223-3511 FREE UPS BROWN



✓152

Pac-Comm Packet Radio Systems, 3652 West Cypress St., Tampa, FL 33607

A Power Supply Primer: Part I

Without a well-regulated and reliable power supply, your state-of-the-art rig will work just about as well as a megaphone.

Number 1 on your Feedback card

No matter how you cut it, the dc power supply is of critical importance to the success of any construction project. It's easy to understand how a project needs correct dc power to operate—about that there is little argument. But what about reliability? The dc power supply is unfortunately the last thing thought of by both amateurs and professional designers. Let me make a few points in that regard.

Point One. During a time when I worked repairing medical equipment at a major hospital, records were kept regarding all repairs. It was found that (over a six-month period) 36 percent of all failures were in the dc power supply either as primary or secondary failures. No other single kind of failure even approached the power-supply failure rate.

Point Two. Several well-known amateur radio transceivers suffered excessive downtime due to underspecified power-supply recti-

fiers. Once the amateurs involved followed the derating advice that will be given in this series, the reliability problem went away (except on Field Day, when all bets are off!).

Point Three. While working for the Food and Drug Administration, I had to examine reports of excessive failure in a certain medical device (fortunately not a piece of life-saving equipment). More than half of the failures reported for that equipment were either rectifiers, filter capacitors, or voltage regulators in the dc power supply—the designer overlooked some elementary design rules which even a novice could appreciate and follow!

Point Four. The US Naval Material Command, recognizing that low-voltage dc power supplies in Navy equipment are a major source of reliability problems, issued tough new guidelines for the design of supplies in military electronic equipment.

Clearly, the design of dc power supplies is a nontrivial matter when considered from a suitability and reliability point of view. In this article and those to follow, we will discuss the proper design of small dc power supplies for amateur and hobbyist applications. In order to keep the arithmetic to a minimum, we will use "rules of thumb" which are proven effective in some cases. We will also provide several Basic computer programs to assist in working some of the arithmetic.

Basic Elements of the Dc Power Supply

The basic dc power supply consists of the following elements: *transformer*, *rectifier*,

filter, and sometimes *voltage regulator*. Also included in some dc supplies are the following features: *overvoltage protection*, *current limiting*, *fusing*, *transient protection*, and various *status indicators*. In the sections to follow, we will discuss each of these.

Transformers

The transformer (Fig. 1) is essentially a voltage converter. It changes the standard line voltage (115 V ac in the U.S.) to a higher or lower voltage required for the operation of electronic circuits. In some other cases, the transformer will be used for *isolation* and will deliver the same output voltage as is applied to the input. The main use of these transformers is *safety*. Many electronic appliances (especially but not universally those marked "ac/dc") are unsafe when operated either out of doors or in a "grounded environment" indoors (e.g., in the cellar on a concrete floor).

Most of the transformers which we will consider are *step-down* types because solid-state electronic circuits typically operate from lower voltages. The "typical" range for most projects is 1.5 V dc to 30 V dc: Linear ICs tend to require ± 4.5 V dc to ± 18 V dc; CMOS digital circuits use ± 4 V dc to ± 15 V dc; TTL digital circuits require 0 and +5 V dc (regulated); transistor circuits require the entire range given above. Some integrated circuits fall outside of the ranges above, but the limits are proper for most devices.

Because the transformer is very efficient, stepping the potential down in the secondary winding increases the current available for

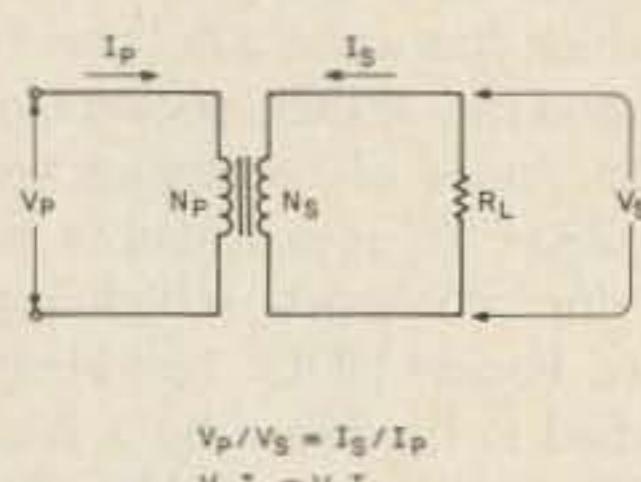


Fig. 1. The transformer is essentially a voltage converter.

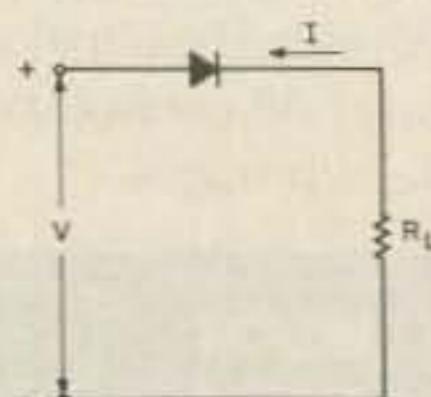


Fig. 2(a). Forward-biased half-wave rectifier.

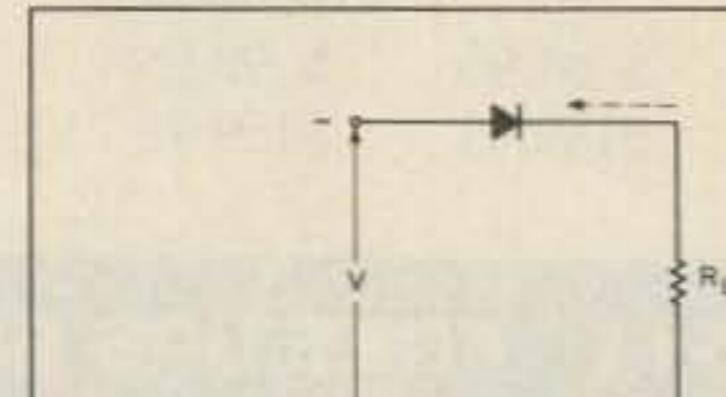


Fig. 2(b). Reverse-biased half-wave rectifier.

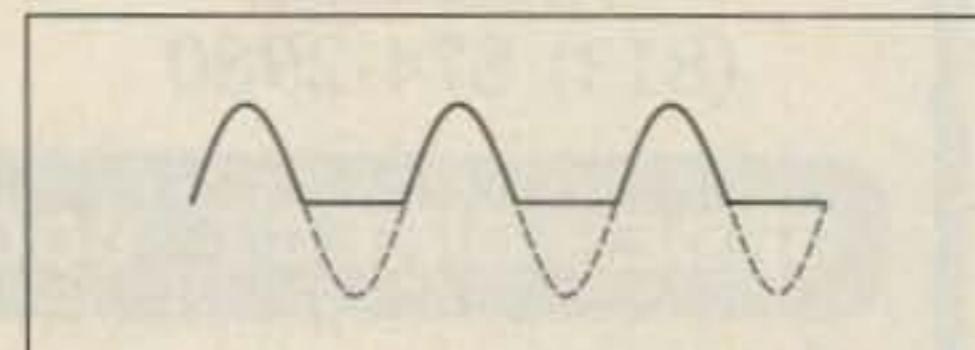


Fig. 2(c). Output waveform of a half-wave rectifier.

any given voltage level (the opposite is true for step-up transformers). The primary volt-Ampere (VA) rating (volts x Amperes) is very nearly equal to the VA rating of the secondary. Simply stated: $V_{\text{pri}} \times I_{\text{pri}} = V_{\text{sec}} \times I_{\text{sec}}$, where: V_{pri} is the voltage applied to the primary winding, V_{sec} is the voltage appearing across the secondary winding, I_{pri} is the current flowing in the primary winding, and I_{sec} is the load current drawn from the secondary winding.

In most transformers, the primary winding is closest to the core and so is not able to dissipate heat to the air as well as the secondary winding. As a result, the limiting factor for the transformer is the *primary VA rating*. This rating should not be exceeded, or low reliability will result. As a matter of normal procedure, I prefer to specify the primary VA rating at not less than 120 percent of the expected power requirement for applications that are analogous to the "intermittent commercial and amateur service" (ICAS) ratings given for vacuum tubes (Watts = volts x Amps).

Where service is continuous or where the environment is hostile (which usually means heat dissipation is limited), then I prefer to specify a VA rating that is 200 percent of the power requirements. In other words, if a project will draw 3 Amperes at 6.3 volts ($P = 3 \times 6.3 = 18.9$ Watts), then I would look for a VA rating of 23 for ICAS-type service or 38 for critical service. These figures translate into secondary current ratings of greater than 3.7 Amperes and greater than 6 Amperes, respectively.

In general, for ICAS-type service, military transformers can be operated at secondary currents greater than the marked values because they are normally derated considerably. I would not recommend pushing these ratings for critical service, however.

Rectifiers

The rectifier converts the alternating current from the secondary winding of the transformer into pulsating dc. The output of the rectifier is not the "pure" dc which we would obtain from batteries, but it is at least unidirectional and can be "filtered pure" (well, almost pure). The simplest form of rectifier is the half-wave rectifier.

All rectifiers operate on the same principle, whether they are vacuum tube, mercury vapor tube, cold cathode gas tube, or solid-state PN junction diodes (or even "mechanical rectifiers," which the old-timers will remember): They produce unidirectional current from bi-directional ac current by virtue of *conducting current in only one direction*. When an ac sine wave is applied to the input of this circuit, current passes through the rectifier only when its anode is more positive than its cathode, as in Fig. 2(a). On the other half of the ac cycle, Fig. 2(b), the rectifier is reverse-biased and so will not conduct electrical current through load resistor R_L .

The waveform associated with the half-wave rectifier is shown in Fig. 2(c). This waveform appears across load resistor R_L . Note that the waveform exists only when the

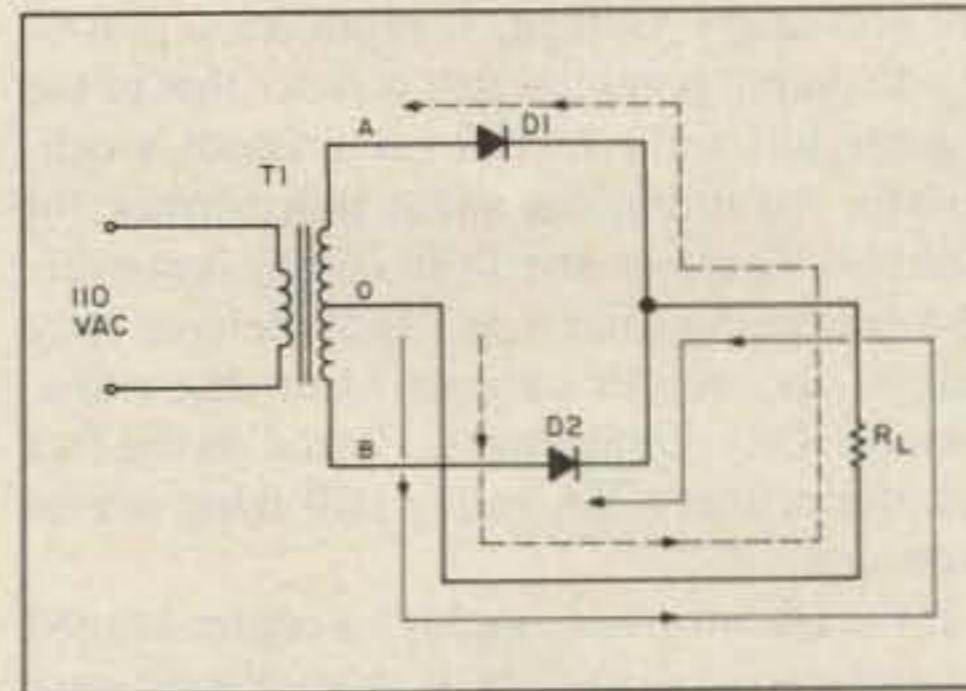


Fig. 3(a). Basic full-wave rectifier using a center-tapped transformer.

input waveform is positive; the negative half-cycle is lost. Since half of the cycle is not used, the half-wave rectifier is wasteful of energy.

The half-wave rectifier has an average output potential that is approximately 45 percent of the applied rms potential, and its "ripple" amounts to 120 percent. To add to the problems of this design, the transformer used must have a primary VA rating that is 40 percent higher than is required if the entire cycle were used (as in full-wave rectification).

A basic full-wave rectifier using a center-tapped transformer is shown in Fig. 3(a). At any given ac peak voltage, one end of the transformer secondary is positive while the other end is negative. The center-tap is at a potential that is half that found across the entire secondary. Therefore, if the center-tap is used as the common reference voltage, then equal and opposite polarity potentials are found at either end of the secondary with respect to the center-tap.

Let's consider the case when the top of the secondary is more positive than the bottom. Current flows from the common center-tap through load resistor R_L and forward-biased diode D1 (whose anode is more positive than the cathode) and then back to the transformer secondary winding. During this period, diode D2 is reverse-biased due to the negative potential on its anode, so no current flows in D2.

On the alternate half-cycle, diode D1 becomes reverse-biased and D2 is forward-biased. Current then flows from the center-tap




Fig. 3(b). Characteristic double-humped waveform of full-wave rectifier.

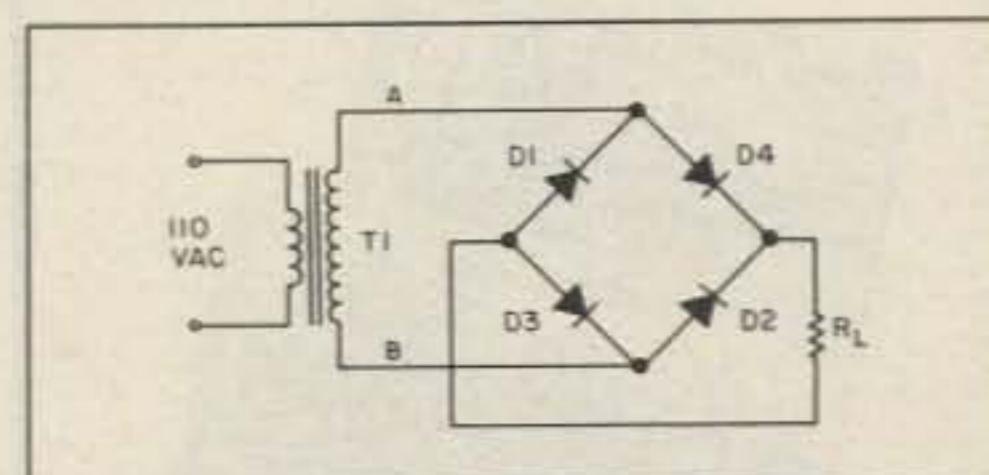


Fig. 4. The bridge rectifier requires no center tap on the transformer.

through R_L and diode D2 back to the transformer secondary.

Note that in both cases the current flows in the *same direction* through load resistance R_L . This action produces the characteristic "double-humped" waveform across R_L shown in Fig. 3(b). We can say the negative half of the ac cycle is "folded up" to the positive side of baseline by the switching action of the diodes.

Another form of full-wave rectifier is the "bridge-rectifier" circuit shown in Fig. 4. It employs a diode "ring" (D1 through D4) for rectification. The secondary of the transformer is not center-tapped because the diode ring provides the negative (and sometimes grounded) zero reference point. The two "corners" of the bridge circuit labelled "-" and "+" go to the positive and negative dc outputs of the power supply or to the same polarity points on the filter capacitor.

Although some designs use individual rectifiers for D1-D4, the trend today is to use a bridge "stack" that includes all four diodes in one package. Fig. 5 shows two common circuit symbols for these devices.

Since the bridge rectifier employs the en-

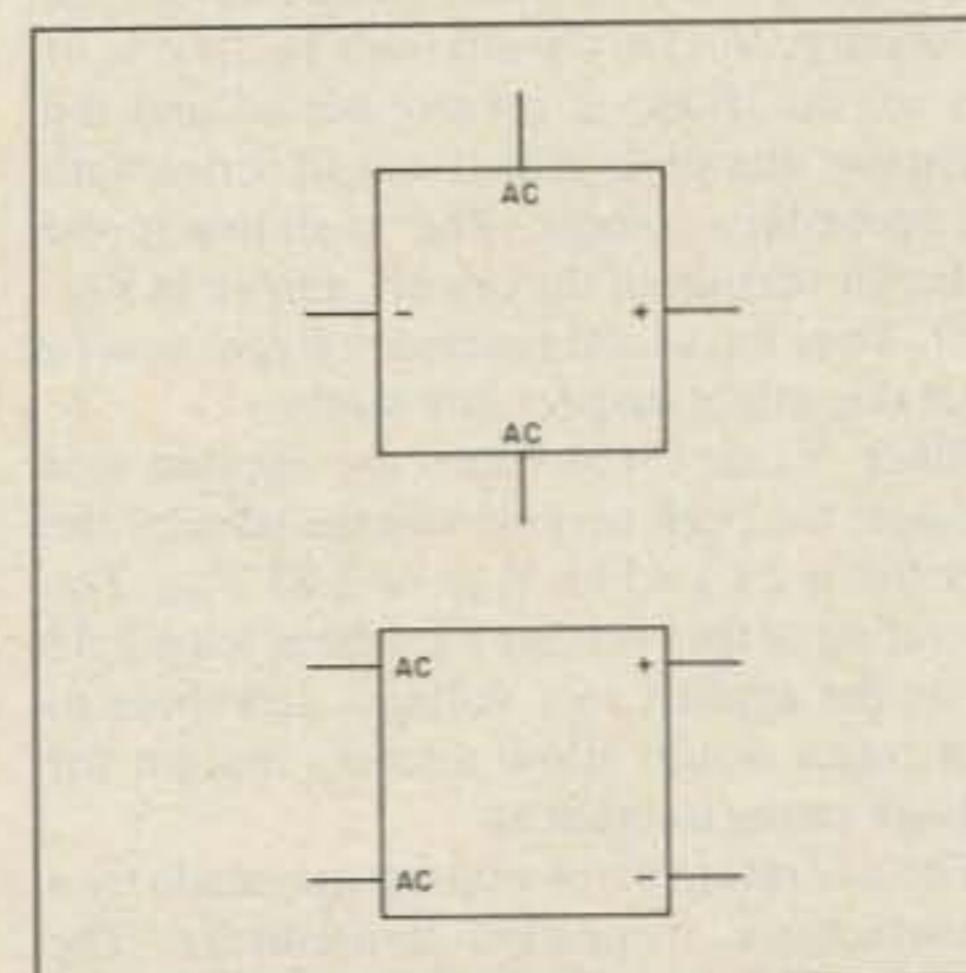


Fig. 5. Circuit symbols for integrated bridge-rectifier assemblies.

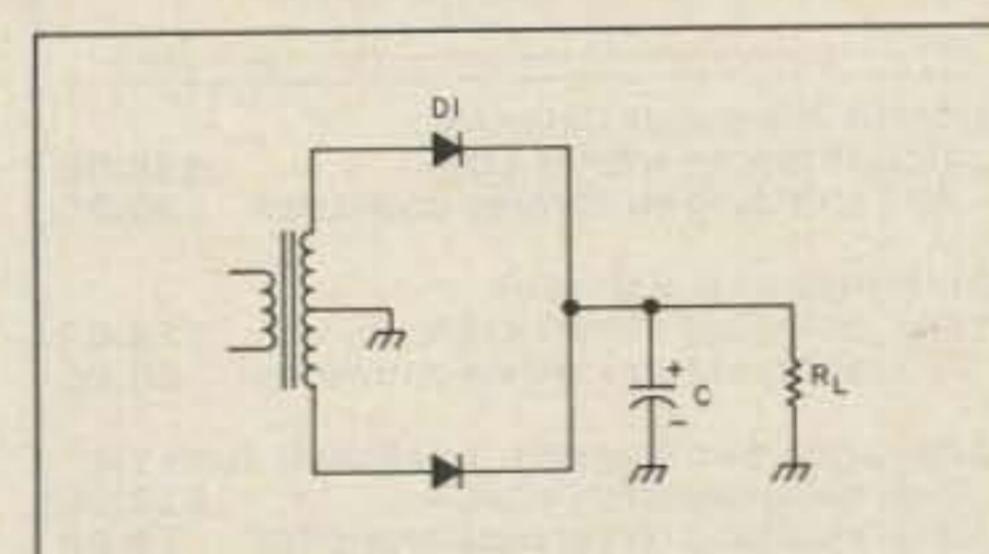


Fig. 6(a). Capacitor C smooths out the pulsating wave.

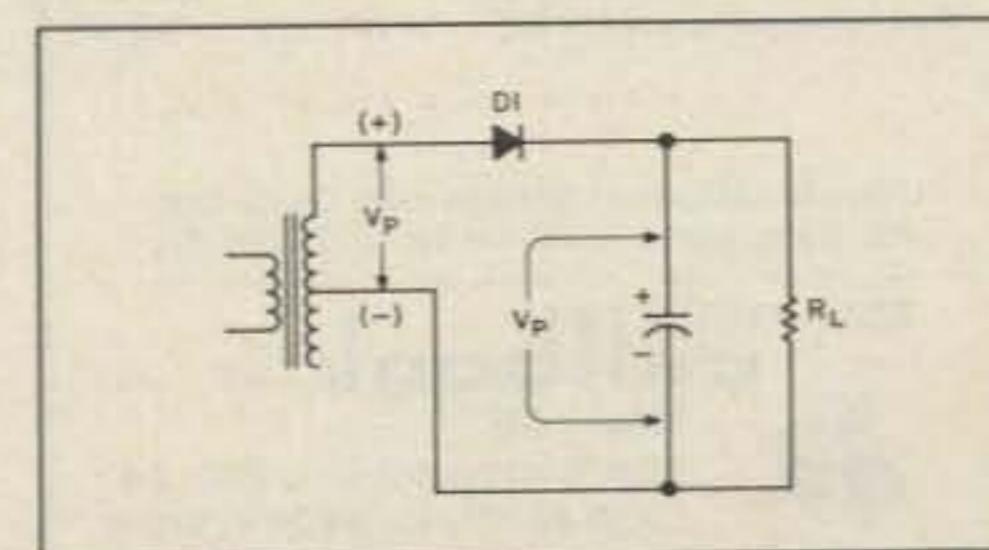


Fig. 6(b). This is what D1 sees on the alternate half-cycle.

1987 CALLBOOKS



The "Flying Horse" sets the standards

Continuing a 66 year tradition, there are three new Callbooks for 1987.

The North American Callbook lists the calls, names, and address information for licensed amateurs in all countries from Canada to Panama including Greenland, Bermuda, and the Caribbean islands plus Hawaii and the U.S. possessions.

The International Callbook lists the amateurs in countries outside North America. Coverage includes South America, Europe, Africa, Asia, and the Pacific area.

The 1987 Callbook Supplement is a new idea in Callbook updates; it lists the activity in both the North American and International Callbooks. Published June 1, 1987, this Supplement will include all the new licenses, address changes, and call sign changes for the preceding 6 months.

Publication date for the 1987 Callbooks is December 1, 1986. See your dealer or order now directly from the publisher.

<input type="checkbox"/> North American Callbook Incl. shipping within USA	\$28.00
<input type="checkbox"/> incl. shipping to foreign countries	30.00
<input type="checkbox"/> International Callbook Incl. shipping within USA	\$28.00
<input type="checkbox"/> incl. shipping to foreign countries	30.00
<input type="checkbox"/> Callbook Supplement, published June 1st Incl. shipping within USA	\$13.00
<input type="checkbox"/> incl. shipping to foreign countries	14.00



SPECIAL OFFER

<input type="checkbox"/> Both N.A. & International Callbooks Incl. shipping within USA	\$53.00
<input type="checkbox"/> incl. shipping to foreign countries	58.00

Illinois residents please add 6½% tax.
All payments must be in U.S. funds.

RADIO AMATEUR
callbook INC. -31
Dept. B
925 Sherwood Dr., Box 247
Lake Bluff, IL 60044, USA

Tel: (312) 234-6600



tire secondary voltage, it produces a pulsating dc output potential that is twice that of the regular full-wave rectifier that needs a center-tap, assuming the same transformer (of course). There is one little catch, however. The bridge rectifier can safely deliver only half of the output current from that transformer! This requirement is based on the fact that the primary VA rating still must not be exceeded.

If the transformer employs a center-tapped secondary winding then it is an almost sure bet that the manufacturer rated the device for regular full-wave—not bridge—service. We can use that transformer for bridge service, but we should accordingly derate the output current by one-half. If the transformer is not center-tapped, then it was probably designed for bridge-rectifier service and can be used at the full rated current.

The average dc potential across an unfiltered full-wave rectified power supply (bridge or otherwise) is approximately 90 percent of the applied rms potential. Full-wave supplies produce 48 percent ripple, which is a lot less than half-wave circuits but still requires filtering. Since both halves of the ac cycle are used, the ripple frequency of a full-wave supply is twice the line frequency, or 120 Hz for a 60-Hz power line; half-wave ripple frequency is the same as the power-line frequency.

Rectifier Specifications

Solid-state rectifiers are generally reliable devices. Premature failure of rectifiers is usually due to improper specification by the design engineer. There are two principal rectifier specifications of concern to us: *peak inverse voltage*, or *piv* (also called *peak reverse voltage*), and *forward current*.

Peak Inverse Voltage

The peak inverse voltage is maximum reverse-bias potential that the rectifier can sustain without damage. It is this specification that seems to give the most trouble. The problem is that many designers fail to recognize the actual reverse voltage in a circuit that contains a reactive element like a filter capacitor. Most filters use a capacitor across the output of the rectifier, as in Fig. 6(a). This filter charges to the peak voltage across the secondary, V_p . On the alternate half-cycle of the ac, the diode is reverse-biased and the capacitor charge is effectively in series with the secondary voltage. This is shown in the redrawn version of the circuit, shown in Fig. 6(b). Thus the actual reverse voltage is twice what one might suspect intuitively.

Since V_p is 1.414 times the applied rms voltage, the peak reverse voltage seen by the rectifier is $2 \times 1.414 \times V_{rms}$, or $2.83 V_{rms}$. The *piv* rating of the rectifier must be at least 2.83 times the applied rms voltage, and three to four times would allow a safety margin for voltage rating tolerances.

The *piv* rating error was the one made by a manufacturer of amateur transceivers. The HV rectifier diodes were rated at 1000 volts *piv*, and the applied voltage was 450 V_{rms} . Thus, because of the filter capacitors, almost

1300 volts were applied to those diodes in the reverse direction, and the result was new diodes and blown fuses every few months!

As a general rule, it is wise to use 1000-volt-piv diodes for all applications up to 300 volts rms, including low-voltage power supplies. In the 1-Ampere size, the 1N4007 is a good choice.

Forward Current

The forward current rating of the rectifier is the maximum sustained current that the device will pass in the forward-biased direction. Do not confuse this rating with the surge current rating, which is much higher. There might be a 25X factor between the two ratings. In other words, a 1-Ampere diode might have a surge current rating of 25 Amperes or more. This rating is the current that is tolerated by the diode for one cycle of the ac input waveform, or less than 17 milliseconds at 60 Hz!

In some cases, there has been a little, er, uh, creative spec writing on the part of some rectifier vendors. Since amateurs and hobbyists can often use ICAS-type ratings, they tend to rate the diode at twice the real forward current rating—especially in the over-1-Ampere category of devices. Thus, I can recall seeing a diode marked with a type number that Motorola claimed was rated at 1.5 Amperes being hawked in a local dealer as a 3-Ampere device! Since Motorola made the thing, I tend to trust their label over that of a surplus rebrander.

In the case of bulk-packed "bargain" rectifiers, the forward current rating is an out and out lie—not merely an almost-reasonable stretching of the truth. The lack of a type number or recognizable semiconductor manufacturer's logo generally betrays these devices. If the rectifier is of uncertain parentage, then be suspicious and derate them by 50 percent or more (in other words, consider a "1-Ampere" device to be a 500-mA rectifier). Since I prefer to specify rectifier forward current at twice (or more) the expected normal maximum load current, these devices should be rated by you at one-fourth the load current.

When you actually mount either a replacement (in case of repair) or an original rectifier, be sure to give the device plenty of breathing room—it gets quite hot. Axial lead rectifiers should be mounted 1/4" from the surface of the printed circuit board, while stud-mounted rectifiers should be mounted on heat sinks. Bridge stacks intended for PC-board mounting should also be mounted with breathing space between them and the board. When laying out a new project, do not mount the rectifier in close proximity to heat-sensitive circuits such as oscillators, amplifiers, and so forth. If an already-built circuit seems unstable with respect to temperature and the rectifier is mounted close to sensitive components, suspect the rectifier as the problem.

Looking Ahead

In the next installment of this series, we will discuss filter circuits for simple low-voltage power supplies. ■

MIRAGE /KLM

Expanding Our Horizons

Introducing

Mirage/KLM 1.2-44 LBX

The first 1260 MHz to 1300 MHz
Made in the U.S.A.

- Factory Tested
- Completely Assembled
- Completely Weatherized Balun
- Also Available Soon . . .

Power Dividers

SPECIFICATIONS

Electrical

- Band Width 1260-1300 MHz
- Gain 18.2
- VSWR Better than 1.5 to 1
- Feed Imp..... 50 Ohms
- Balun 4:1 Rigid Coax

Mechanical

- Beam Length 12' 4"
- Element Length 4.5"
- Mast 2" O.D.
- Windload 1 sq. ft.

✓91

Mirage Communications Equipment, Inc.
P.O. Box 1000
Morgan Hill, CA 95037
(408) 779-7363

Born-Again Bargain Boards

It's magic! Turn scrap PC boards into an electronic library of pre-etched building blocks.

Number 2 on your Feedback card

I was visiting my friend Bob in his basement ham shack one evening, and I was enjoying myself watching him rummage around in his junk pile as he tried yet again to shrink it to a manageable size.

"Hey, what are those?" I asked as he retrieved a dusty box from beneath a workbench and hauled it toward the basement bulkhead on his way to the trash can.

"It's a lifetime supply of PC boards," Bob said, "all unused, no components, just etched boards."

"Gee, it seems a shame to just throw them away," I said. "There must be something they could be used for."

"What, square Frisbees? Shingles for a leaky doghouse? What earthly good is a PC board somebody else has etched?" Bob laughed. "They've kicked around under my bench for years, and I never did anything with them. Here, you want them? Take them away!"

That's how I wound up with 20 pounds of assorted "pre-etched" circuit boards, a term akin to "pre-owned automobile." Somewhere, some hapless company had made a mistake and ordered too many PC boards for its needs, or perhaps a PC board designer made a few layout errors. It's also possible that the artwork for the board was revised and the old-generation boards were juked,

or that the boards were rejected by quality assurance.

Sorting Through the Boards

In any case, what kind of silk purses could be made from this collection of electronic sow's ears? I began by sorting through the boards: Bob had assembled a fine assortment of PC boards, that was for sure.

I divided the boards into two general classes: digital and analog. The digital boards were characterized by large numbers of integrated-circuit DIP pad patterns arranged in neat rows. The analog boards had a few DIP patterns, but most of the pads were laid out in an irregular fashion.

Most of the digital boards were two-sided, with traces on both sides; a few boards were of multilayer construction. When I held these to the light, I could see a dark inner layer which didn't correspond to the traces on either surface of the board. Many of the analog boards were of single-sided construction.

Almost all of the boards were made from the familiar green-colored epoxy-fiberglass material that is widely used in industrial and military electronics. A few of the analog boards were made from a tan-colored epoxy-paper laminate. There were even one or two boards made from brown paper-phenolic material; this stuff was used in huge quantities for consumer goods. Its most notable features are a barnlike smell when it's overheated and its tendency to lose traces when a soldering iron is applied for too long. I threw these boards away.

The Digital Boards

I selected a double-sided digital board for my first experiments. The board was approximately six inches by nine inches and it had pads for approximately 30 integrated circuits, all of 14- and 16-pin sizes. There was a nice gold-plated edge connector on one end and pads for test points at the other.

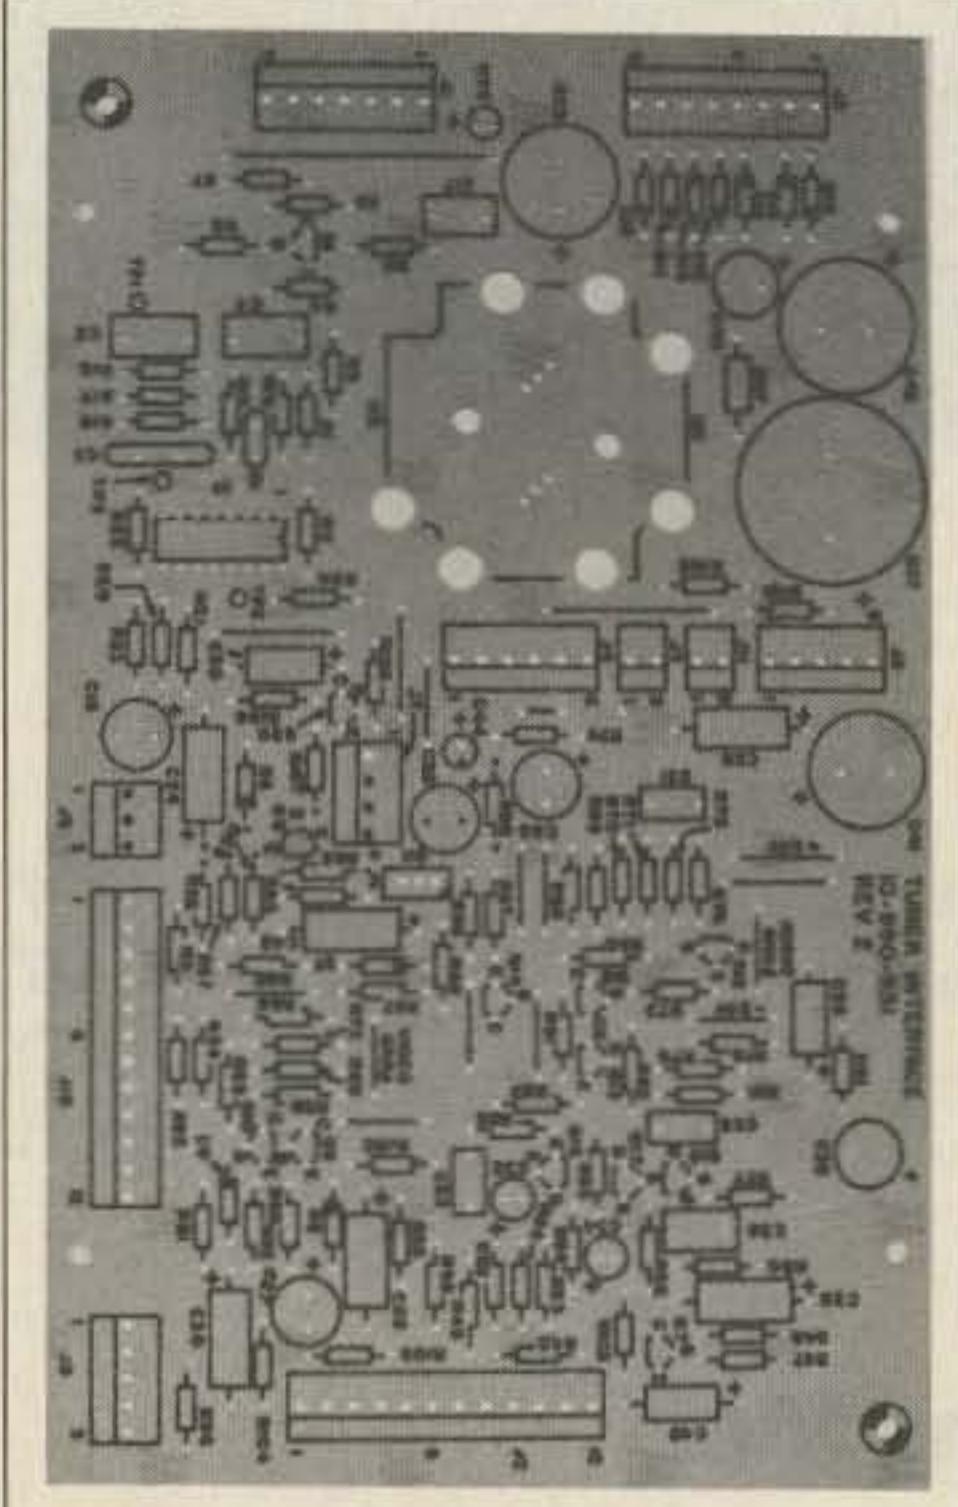


Photo A. Component side of the "Tuner Interface" analog PC board. The power supply section is in the upper right portion of the board.

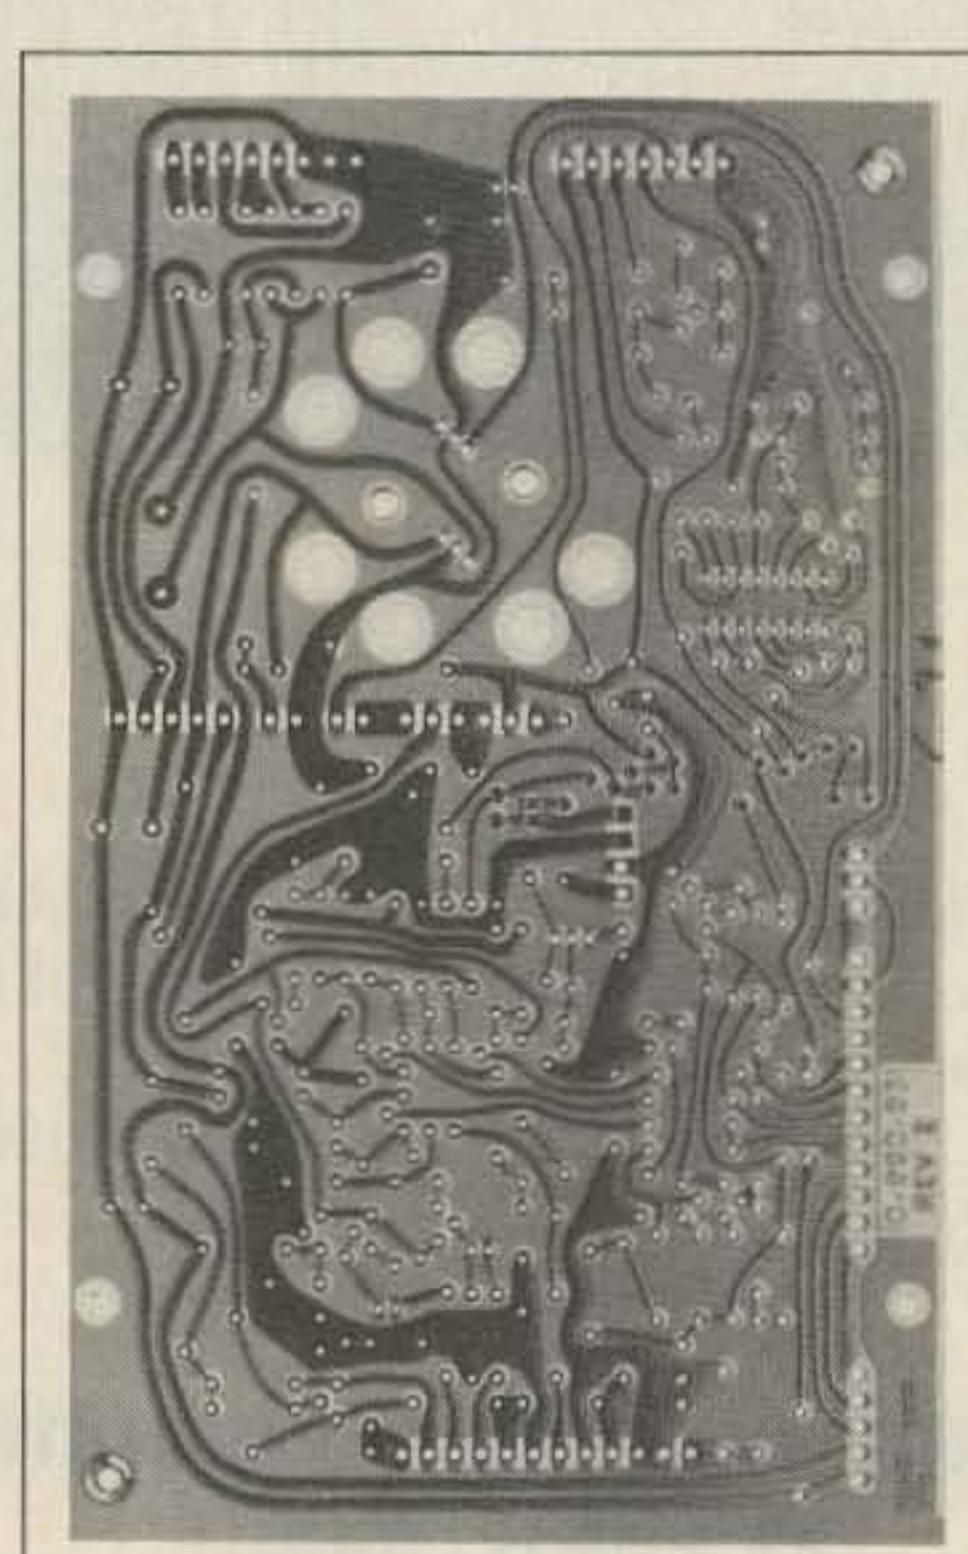


Photo B. Foil side of the "Tuner Interface" analog PC board. The power supply section is in the upper left portion of the board.

While traces snaked every which way between IC locations, there was a power bus pattern that ran to the corner pads of most of the IC locations. If I could remove all of the traces except the bus, perhaps I could use the card as a breadboard.

I plugged in the soldering iron and, while it was warming up, I fitted a new, sharp blade into an X-acto® knife. I selected a PC trace at random and cut through the copper close to the IC pad at each end. I held the hot soldering iron onto one cut end of the trace and simultaneously pried up the trace's end with the knife.

Next, I grabbed the raised end of the trace with a pair of needle-nose pliers and pulled. Zzzip! The trace peeled cleanly away from the board and left a ghostly trail on the board to mark its passing.

I fell into a steady rhythm: Cut both ends, heat and slightly lift one end of the trace, and then peel away the traces when a bunch were ready. There were a couple of hazards: It was essential to use a sharp blade in the X-acto knife, and the exposed edges of the peeled-away copper traces were razor-sharp and capable of dealing exquisite "paper" cuts.

When all the signal traces were stripped away, I installed wire-wrap IC sockets and soldered their pins to the power bus pads and two corner pads for mechanical strength. Locations for bypass capacitors were already pre-etched next to each IC, and the junk box yielded a matching edge connector. The board was ready to be wrapped.

Was the time required to strip away the traces well spent? Yes, I think so. Thanks to its power buses and good ground plane, the board would be electrically less noisy than a totally wire-wrapped equivalent, and its cost was much less than a commercially available bus board.

The technique works best for small, double-sided PC boards that are laid out in an open fashion. Multilayer boards are unsalvageable if signal traces are buried in the inner layers; if the inner layers are the power and ground planes, the board may be usable. Also, avoid densely packed, large boards with more than 30 IC locations. The larger boards are harder to work with and are less useful for small projects.

The Analog Boards

Next, I turned my attention to the pile of analog boards from Bob's junk box. At first glance, these boards seemed less useful than the digital boards. There was no regular power-distribution bus, nor were there many DIP locations. There were dozens of identical boards, however.

One board caught my eye: It was a single-sided board that measured about five by eight inches. Its top surface was silk-screened with component outlines and the words "Tuner Interface" (Photo A). The pattern of copper paths on the reverse side (Photo B) was simple enough to trace into a schematic, but why bother?

After staring at the board for a few minutes, however, I noticed an interesting pat-

tern: The outlines of electrolytic capacitors marked with polarity symbols, diodes, and a heat sink were visible in the silk-screened markings. Whatever the board's ultimate function was, it included a power supply section with IC voltage regulators.

Power supplies are basic building blocks common to almost every project, and it's time-consuming to lash one together from scratch. The circuitry doesn't vary much from design to design: There's always a rectifier and a filter capacitor, and often a three-lead voltage-regulator IC of the 78XX family.

The chances were good that the designer of the board used the same building blocks in his power supply. I spent a few minutes tracing etch and discovered that he had. I could install my own components, ignore or cut away the unwanted circuitry on the board, and have a regulated power supply building block for future projects. There were two dozen boards in the pile, so I had a lifetime supply.

Tracing the power supply wasn't hard, so I turned my attention to the rest of the board. Could I figure out what it was used for and perhaps determine what components were used? The low density of components and single-sided construction suggested that the board had been built for use in a consumer product, perhaps a projection television receiver.

I selected a DIP IC location on the board as a starting point and systematically examined all traces going to its pins. Two traces made their way back into the power-supply section, and by examining the polarity markings on the silk-screened capacitor outlines, I was able to determine which IC pin received positive voltage and which was grounded.

With that information, I began a search for a linear IC whose pins matched my findings. I selected a data book and reviewed common operational amplifiers and comparators: no dice. Next, I looked through the consumer IC section of the data book: again, no luck. I switched to another vendor's data book and repeated the process: bingo! There, on page 792 of the RCA linear IC data book was the CA3159E, a "horizontal processor and agc detector" device.

The data book included a functional block diagram of the IC and an application circuit, so I was able to identify the input and output pins that were being used. A little more tracing of PC patterns and I discovered that only the agc portion of the chip was being used. With a little effort, the circuit could be adapted to other functions. I had added another potential pre-etched "building block" to my collection.

Helpful Hints

I found a couple of techniques very helpful to the process of tracing PC patterns. When an etched run has been followed to its ends, it's a good idea to mark the run to avoid confusion. I found that a Pilot ultra-fine point permanent marker, type SC-UF, worked well and semi-permanently marked both copper traces and fiberglass. The marker's fine, sharp point also made it possible to write part numbers on the circuit side of the board. Alcohol or solder-flux solvent will remove the ink.

It's also helpful to mark the beginning and end of a trace and then flip the PC board over to see what components are in the vicinity. I took a pair of plastic-headed map pins and blunted their points. It was easy to poke the pins through the trace's beginning and ending holes and then reverse the board.

Once you have identified the function of a PC board or a portion thereof, you can choose to attack the board with a nibbling tool or a bandsaw and cut out the interesting part. Avoid breathing the dust from a glass-epoxy board because it's an irritant and a good substitute for itching powder. Make sure that you haven't introduced any short circuits due to copper burrs when you made the cuts.

Choosing the Boards

If you should find a batch of boards for sale at a flea market, look them over carefully before you decide to buy them. Make sure that the boards have been fully processed. Avoid those that have bare copper traces or chemical residue stains. Some boards have had their gold-plated contact fingers clipped away. These boards may still be useful if an IC location is used as a connector site.

The most desirable boards will have their function and component part numbers silk-screened on the component side of the board. Unlabeled boards, "mystery" boards, and large digital boards are less useful. Do not spend much money on any bare board. Remember, you're buying someone else's mistake and you still have some detective work ahead.

Is it worthwhile to salvage unused PC boards? In general, yes, if you can identify a basic building-block function that you can use. The more boards of a useful type you have, the better, because your research time has a larger payoff.

Don't overlook the educational benefits of putting your reverse-engineering skills against an unknown designer's efforts. The secret is to take advantage of what would otherwise go to waste and make it useful to you. ■

FIVE BUCKS FOR FIVE BOARDS

A package of five circuit boards is available from the author for \$5 ppd. The boards are of mixed sizes and shapes and are representative of the types discussed in this article. Send a check or money order to: Brad Thompson, 77 Waltham Street, Maynard MA 01754.

Defuse RFI

*A couple of caps and some coax
put an end to crisped lips and cruddy audio.*

Number 3 on your Feedback card

The response to "Lightning Never Strikes" in the August, 1986, issue was so great that we decided to reprint this WØWUZ classic from 1983.—Eds.

As a long-time denizen of 10 meters, I have learned along with my like-minded compatriots to suffer when the band is really running well and our friends from 80, 40, and 20 come up to partake of the fun and games. Suffer? You bet!

A ground wire is totally ineffective over 1/8 wavelengths on the frequency in use. Dc yes; rf no. This works out to about 4 feet on ten. I realize it is extremely difficult to achieve a situation where your ground wire is 4 feet or less, *to the earth*, not the toilet!

Another problem (coincidental with the above) is rf feedback in the TX audio, which in its least annoying form makes your voice sound like vibrating chicken wire and in its worst sends spurs running 100 kHz up and down from your central frequency (or from dc to daylight, as we used to say in Navy ECM).

For considerably less than \$5, there are steps to take that can result in hearing, either while in QSO or afterwards when the station you worked is talking with someone else, "Lord, the guy in _____ had beautiful audio!" These measures are not new, but like so many other pieces of hands-on know-how, they need to be repeated and correlated every now and then to refresh and instruct those who don't read electronics books on the john.

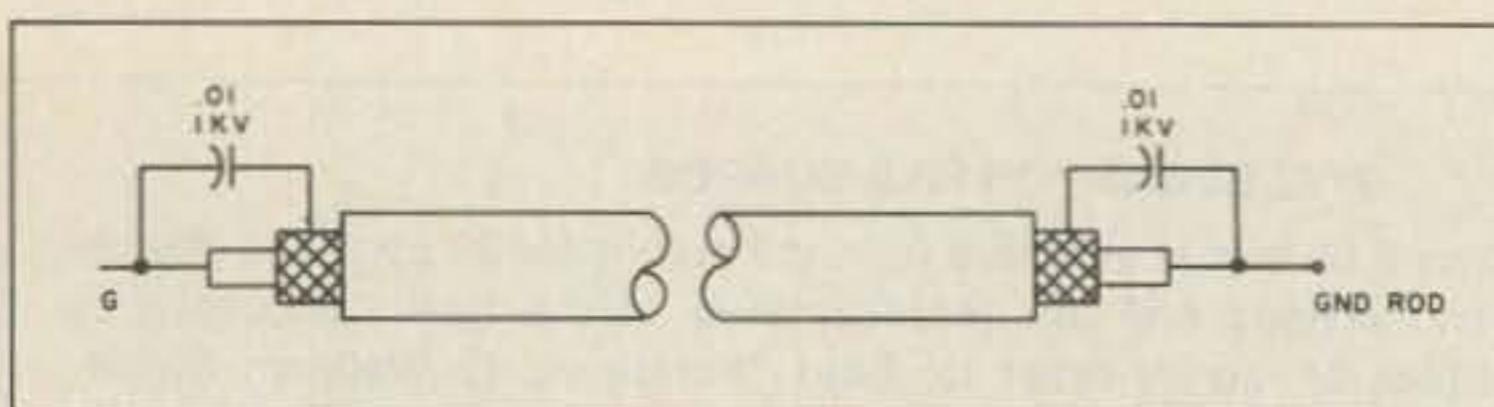


Fig. 1. The coax ground couldn't be simpler.

If your rig is in the basement, effect a 1/2" 45° hole in the wall with a masonry bit or star drill and drive a 6-to-8-foot ground rod, leaving about 5 inches protruding. Seal with waterproof putty or silicone. Properly placed, this will give you about a 1-foot ground connection. For those not in the basement, a coaxial ground is needed.¹ This is a simple miracle that makes your effective ground length only a few inches!

"There is absolutely no excuse for the cruddy signals on HF... if you're not going for the solution, you're part of the problem."

A coax ground is made using good quality (95% shield braid) coax such as Columbia 1107 or 1108 RG-8/X or Mini-8 with a stranded center conductor. The center conductor is used as the ground wire, connected to the *rf generating unit* and the outside ground system. It's bypassed at each end with a .01-uF, 1-kV disc capacitor to the

shield braid (see Fig. 1). Don't tie all of your station's components together with zip cord or aluminum wire. Let the coax shield handle the dc grounding between units as it is seldom over a foot or so long. Otherwise, you set up ground rf loops that defeat everything you've done.

Microphones seem to be universally designed for use in high school auditoriums, with no rf suppression whatsoever. This is simple, so simple that there is absolutely no excuse for rf feedback in this area. All that is usually necessary is to install a .01-uF disc capacitor across the microphone cartridge (do it quickly because it can't take much heat!) and add a 1-mH choke in series with the audio high lead. This may be done at the mike or on the inside of the mike jack of the transmitter, which is more convenient when using several microphones. If using a power mike, ferrite beads on the transistor base leads and a pi filter using two .005-uF capacitors with a 1-mH choke are called for (Fig. 2).

In summation, there is absolutely no excuse for the cruddy signals on HF, and if you're not going for the solution, you're certainly part of the problem. These steps will also knock an RFI problem in the ditch. ■

Reference

1. "The Capacitive Coaxial Ground Wire," 73, May, 1980, p. 82.

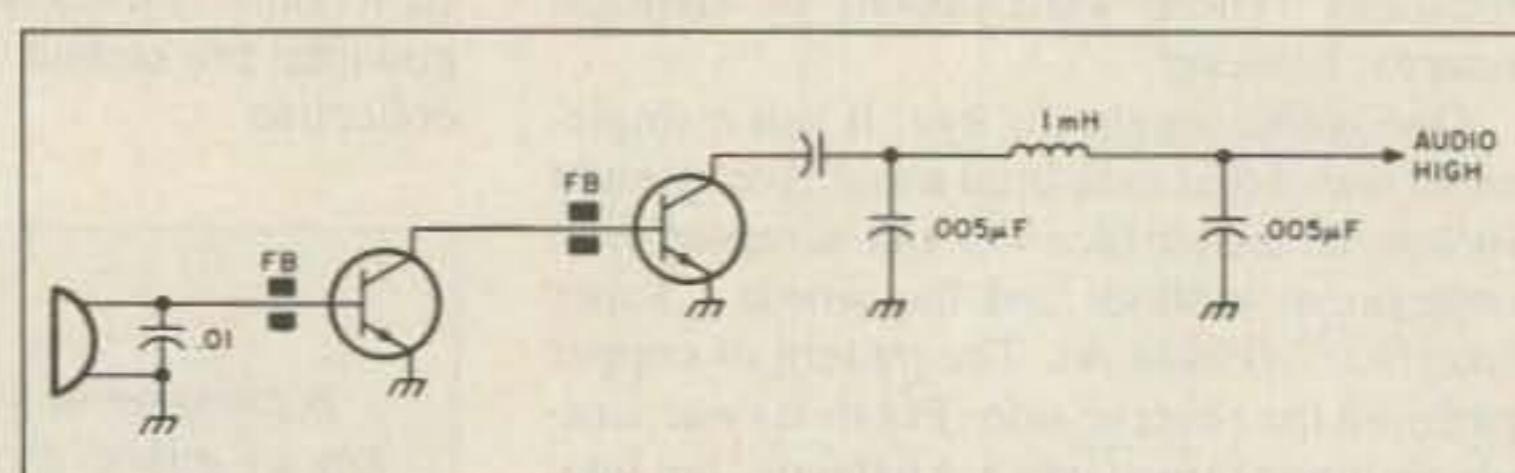


Fig. 2. A little rf suppression will dramatically improve your transmitted audio.

7 Good Reasons to Subscribe to 73®

1. The League has long had a policy that you must subscribe to QST before you have a right to complain about the League. Why should 73 have any less lenient a policy? From now on, all you readers who are complaining about my editorials . . . subscribe first, then complain. It's my policy.

2. Do you sit there helplessly while your friends tear the latest 73 to bits over the air, frustrated because you've been too cheap to subscribe and 73 hasn't yet gotten to the newsstand or local ham store?

3. You know, it isn't as if I don't make it a practical financial decision for you. If you insist on helping to pay for your local newsstand owner's yacht, you'll shell out \$35 a year for 73. I'd rather you contribute to my dinghy fund at \$20 and blow the extra \$15 on a fur coat for the wife. Heck, at least bring the poor suffering woman some flowers . . . say I sent 'em.

4. 73 can save you from a terrible fate—being a known packet nerd. Get out your August issue again and get with this packet stuff. Hey, have I ever led you wrong? Youngsters (if there are any) can ask their grandfathers about when they fought me tooth and nail as I pushed SSB in the late '50s. Their fathers hated it when I shoved repeaters and FM down their throats in 1969. Then I got enthusiastic about computers in 1975, generating further bitching. Now I'm plugging packet, so subscribe and get on the bandwagon, fighting me every inch of the way.

5. This is a bonus. Now that I've started getting some life into 73, I need your support with a subscription. More, I really need your help in getting your friends and fellow ham club members to subscribe. Talk it up, okay?

6. With new communications technologies becoming so important to business, 73 obviously is necessary for you to read if you are going to be adequately informed for your work. What could be a more valid business expense? So why shell the hard-earned out of your pocket? Let your business keep you informed on the latest in communications technology . . . via 73.

7. There, I just saved you a bundle. Am I kidding, or am I serious? Find out. Subscribe now—only \$19.97 and save over 40%, while they last. Send a check or credit card information . . . or call my gorgeous 800 operator. Hey, don't ask for me, I'm out checking into dinghy prices.
(800) 722-7790



Wayne Green

Wayne W2NSD/1

YES! I need the excitement that 73 brings to hamming each month. Send me 12 issues for 19.97, that's a savings of 43% off the cover price.

MC

AE

VISA

Bill Me Later

Card# _____

Exp. Date _____

Name _____

Call _____

Address _____

City _____

State _____

Zip _____

Please allow 6-8 weeks for delivery. This offer expires December 31, 1986.

76A600

73, WGE Center, 70 Rte.202 No., Peterborough NH 03458-9995

Alan Smith, Sr. W8CHK
Alan L. Smith WB8YOB
6275 King Arthur Drive
Swartz Creek MI 48473

Commodore's RTTY Riot

*If you can get the C-64 away from the kids,
try this simple method of computerizing your TTY operation.*

Number 4 on your Feedback card

The Baudot Model 14, 15, and 19 Teletype® machines have to some extent fallen from favor. Even the wondrous Model 33 (ASCII) is now selling at dumping prices at flea markets. It's no secret that flea-market prices tend to be a bellwether of change. In this case, they simply reflect the impact of personal computers on the ham shack. But the rush to get rid of the old reliable printer workhorses may be a bit premature: They continue to be great hard-copy machines for RTTY, and interfacing to the C-64 through the current loop can be done for just a few dollars and very little effort.

This home-brew C-64 interface/KG3V-software combination will go receive or transmit at 45 bps or 110 bps with the Hal ST-6—and probably with any terminal unit

that is presently connected (or connectable) to the 60-mA loop of a Teletype® machine such as a Model 14, 15, or 19. (300 bps and 1,200 bps with home-brew KG3V modem—see July, 1981, *Ham Radio*.)

There are a number of ways to work out a practical hookup between the older RTTY tuning units, printers, and the PCs most often found in ham shacks. Except for its cost effectiveness, this project doesn't break any new ground. And as for the computer part, the Commodore 64 appears to be as popular a choice as any for the ham shack. It also happens to have a user port that is a very friendly place to gain access to the operating system.

We have one Model 15 working perfectly with this interface and a ten-year-old home-brew demodulator built with polar relays and

another with a Hal ST-6. With regard to the latter, as the loop current is supplied by the tuning unit, the TTY printer can be eliminated if desired. When this is done, a current-limiting device (100 mA maximum) must be installed in the loop to protect the interface. (Note: Some ST-6s may require a small modification to enable 75- to 110-baud operation. The details of this mod are available from the Hal corporation.)

Fig. 1 shows a functional block diagram of the various units required to complete the project. If an existing station is to be converted in this manner, nothing need be disturbed except for breaking the loop current line to make a series connection with the interface (two wires). The C-64 is not disturbed in any way at all. Simply plug in the interface at the user port and load the "RTTY" program.

One advantage of using this system is that when you are not in the shack, the computer can be switched off without breaking the loop. Therefore, autostart traffic can still be copied with the page printer.

The software required to turn your C-64 into a RTTY machine is the brainchild of Thomas B. Zelwanger KG3V. The program and documentation (at latest revision) can

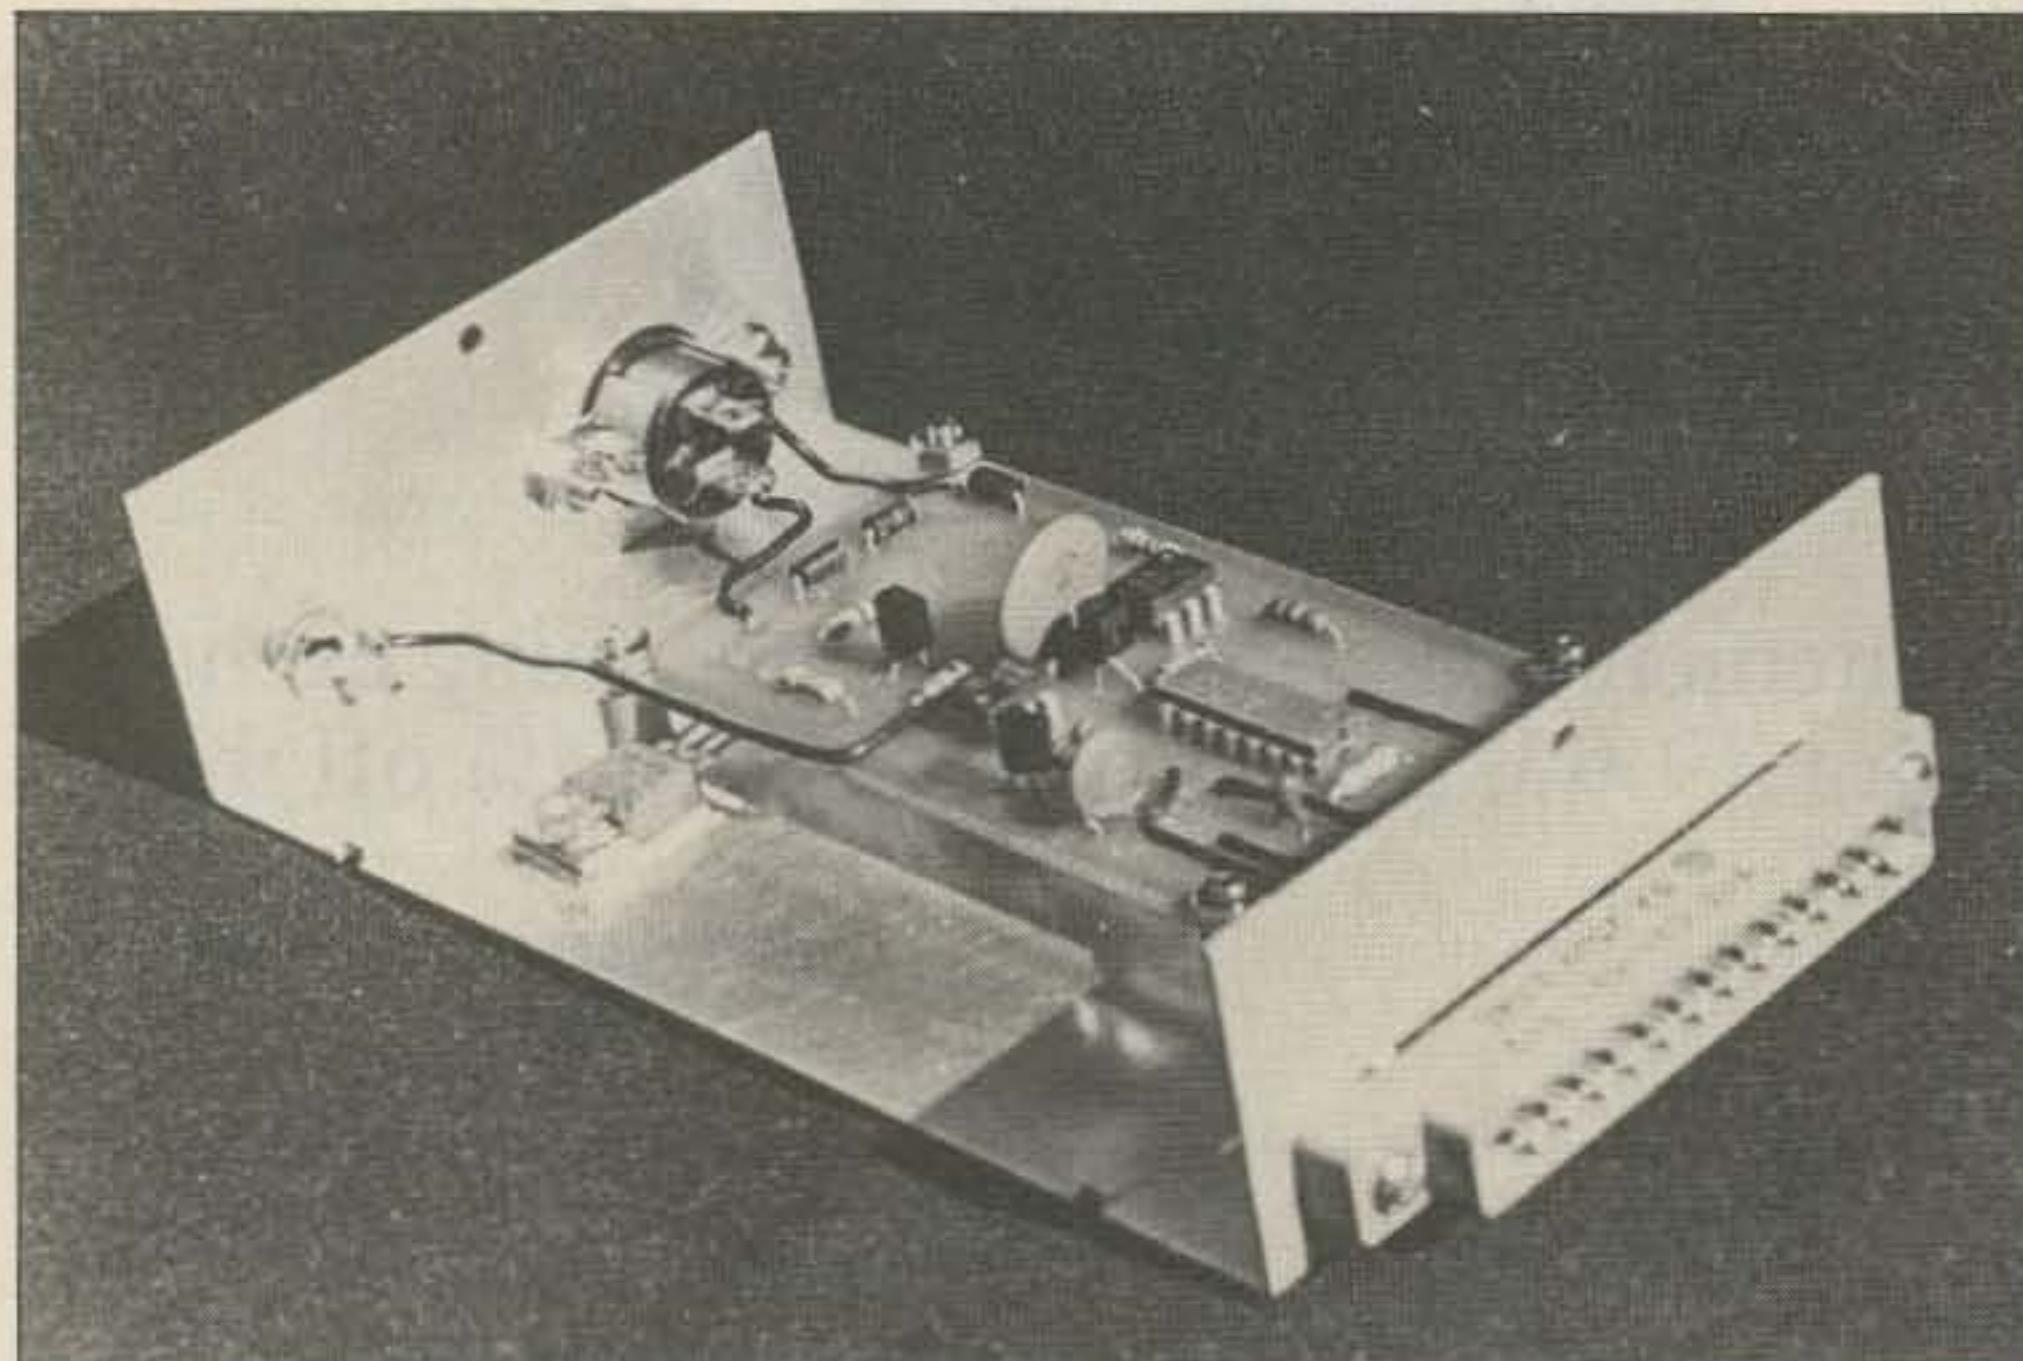


Photo A. The fully assembled interface with top cover removed.

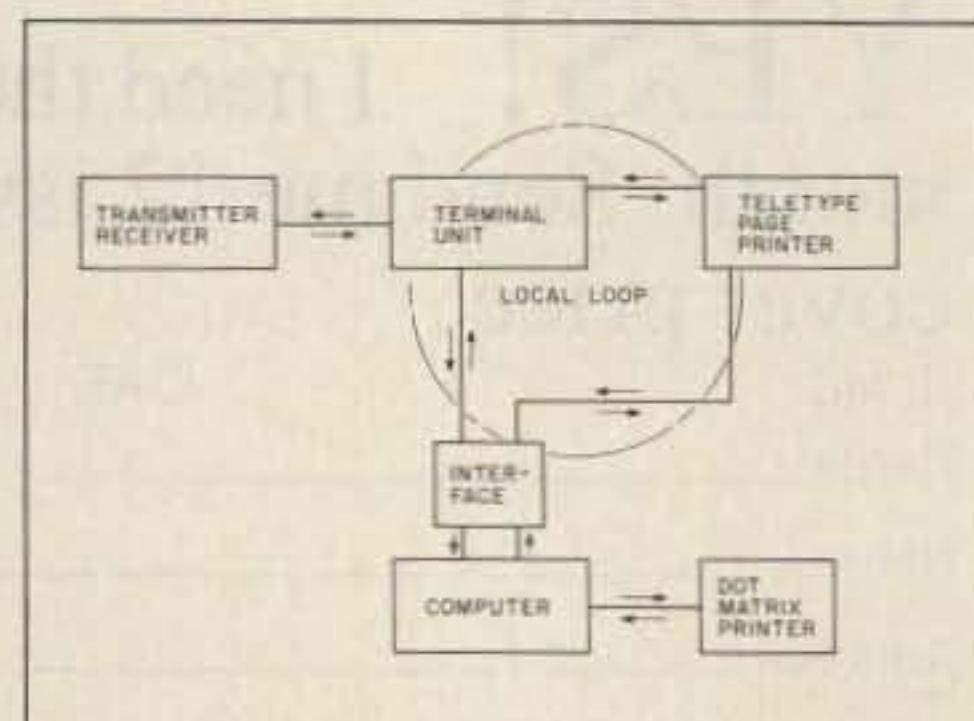


Fig. 1. Block diagram, RTTY local-loop configuration.

be obtained from KG3V (PO Box 62, State College PA 16804). Send Tom a blank tape or disk along with \$2 for postage and packing. The purpose of his generosity is to encourage greater activity on RTTY, and while you won't find all the bells and whistles of commercial software on the KG3V program, it is nevertheless very effective.

Construction of the interface is quite conventional. There is lots of room on the board for the parts. Use standard printed-circuit cautions in the parts assembly. Radio Shack part numbers are given in the parts list when possible.

Fig. 2 shows the schematic diagram, Fig. 3 shows the circuit-board layout, and Fig. 4 shows the parts placement in graphic scale.

Q1 (RCA SK-3220/198) is packaged complete with mounting hardware. Substitutes for this part may be packaged individually. This transistor is mounted to the circuit board and to the case for a heat sink. To ensure a precision fit between Q1 and the circuit board and the case, use the spacer length called for and assemble the transistor as shown in Fig. 4. The case requires the drilling of nine holes and a cutout for the edge connector, as shown in Fig. 5.

Circuit Description

As is well known to RTTY aficionados, there are few electrical circuits in use by hams as simple as the common local loop. Its only purpose is to interconnect the peripherals commonly associated with the RTTY mode. This loop, or common line, is a universal message cable for the serial data coming from or sent by these peripherals. However, all RTTY gear (pre-solid-state) incorporates high-voltage circuits and lots of rugged components. Computers are not quite that simple. The object of the project interface is to make the C-64 compatible with the local loop.

The basic function of the interface is to orchestrate the transfer of data between the high voltage levels of the ST-6 (et al) and the TTL voltage levels of the computer.

With the software driver loaded and running, the user port is configured as an RS-232C data port. Add the interface, and the receive serial-data stream enters the computer at pins B and C. On transmit, a request-to-send signal is sent by the computer to pin D, and the transmit serial-data stream leaves from pin M. The request-to-send signal can be used to control the transceiver. More on that later.

Only the pins in Table 1 are used for this project; the remainder can be disregarded.

The project interface is seen by the terminal unit as just another peripheral. Connection to the loop is made by breaking the circuit and splicing in the interface with a serial connection through PL-1. Polarity must be observed. Turn off power to the computer before plugging in the interface, and switch off the tuning unit before working on the external loop circuit.

The emitter of Q1, emulating a normally closed switch, is enabled open when the base

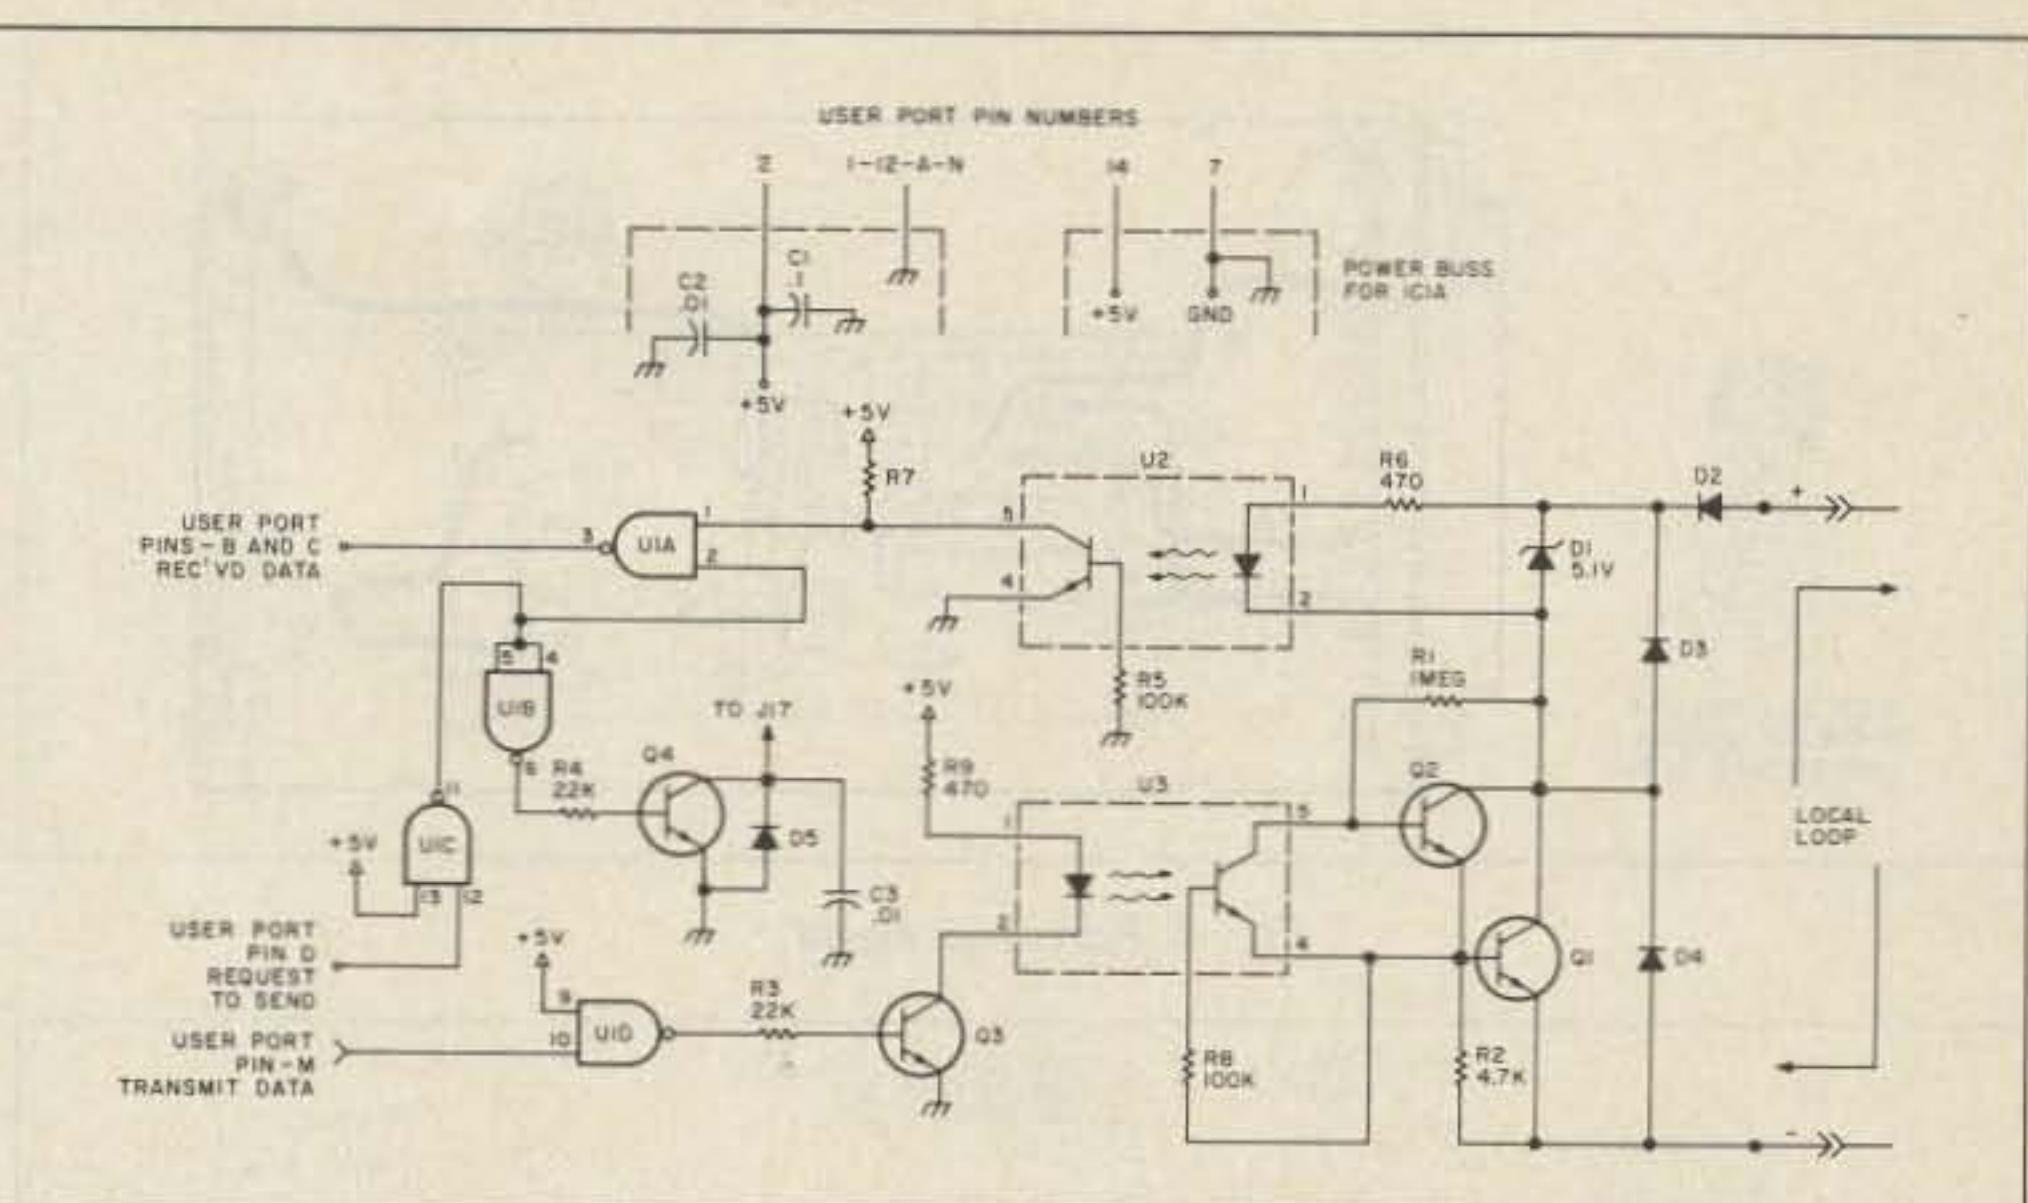


Fig. 2. RTTY/C-64 interface schematic.

current of driver transistor Q2 is shorted by the output transistor in optoisolator U3.

R1 supplies a small current to Q2, which provides a bias to hold Q1 closed during mark pulses. This normally closed switching default is an important feature. The normally closed Q1 switch preserves local-loop continuity and allows data flow through the terminal unit and printer, even when the computer is switched off or disconnected from the project interface.

Data generated by the computer has a logic orientation as is required for RTTY encoding. Mark is a 1 (or 5 volts). Space is a 0 (zero volts). The outbound data stream of ones and zeros is present only on transmit, appears at pin 10 of IC1, and is routed to output pin M.

U1 has four NAND gates. Section U1D is set up to invert the computer output so that mark = 0 and space = 1. The output of this gate (pin 8) drives Q3 through a current-limiting resistor (R3) at the base. Q3 conducts on space and switches on the photodiode portion of U3.

The switched-on photodiode triggers its optically coupled transistor into conduction, which results in a drop in the bias current of Q2, thus turning it off. The normally closed switch then opens. This breaks the local loop for the duration of the space pulse.

Data from the loop is received through optoisolator U2 where the photodiode and series resistor R6 shunts zener diode D1, which is connected in series with Q1. R6 limits photodiode current to 8 mA during mark, or 60-mA loop current.

In the absence of loop current, defined by the presence of space pulses, the U2's photo-

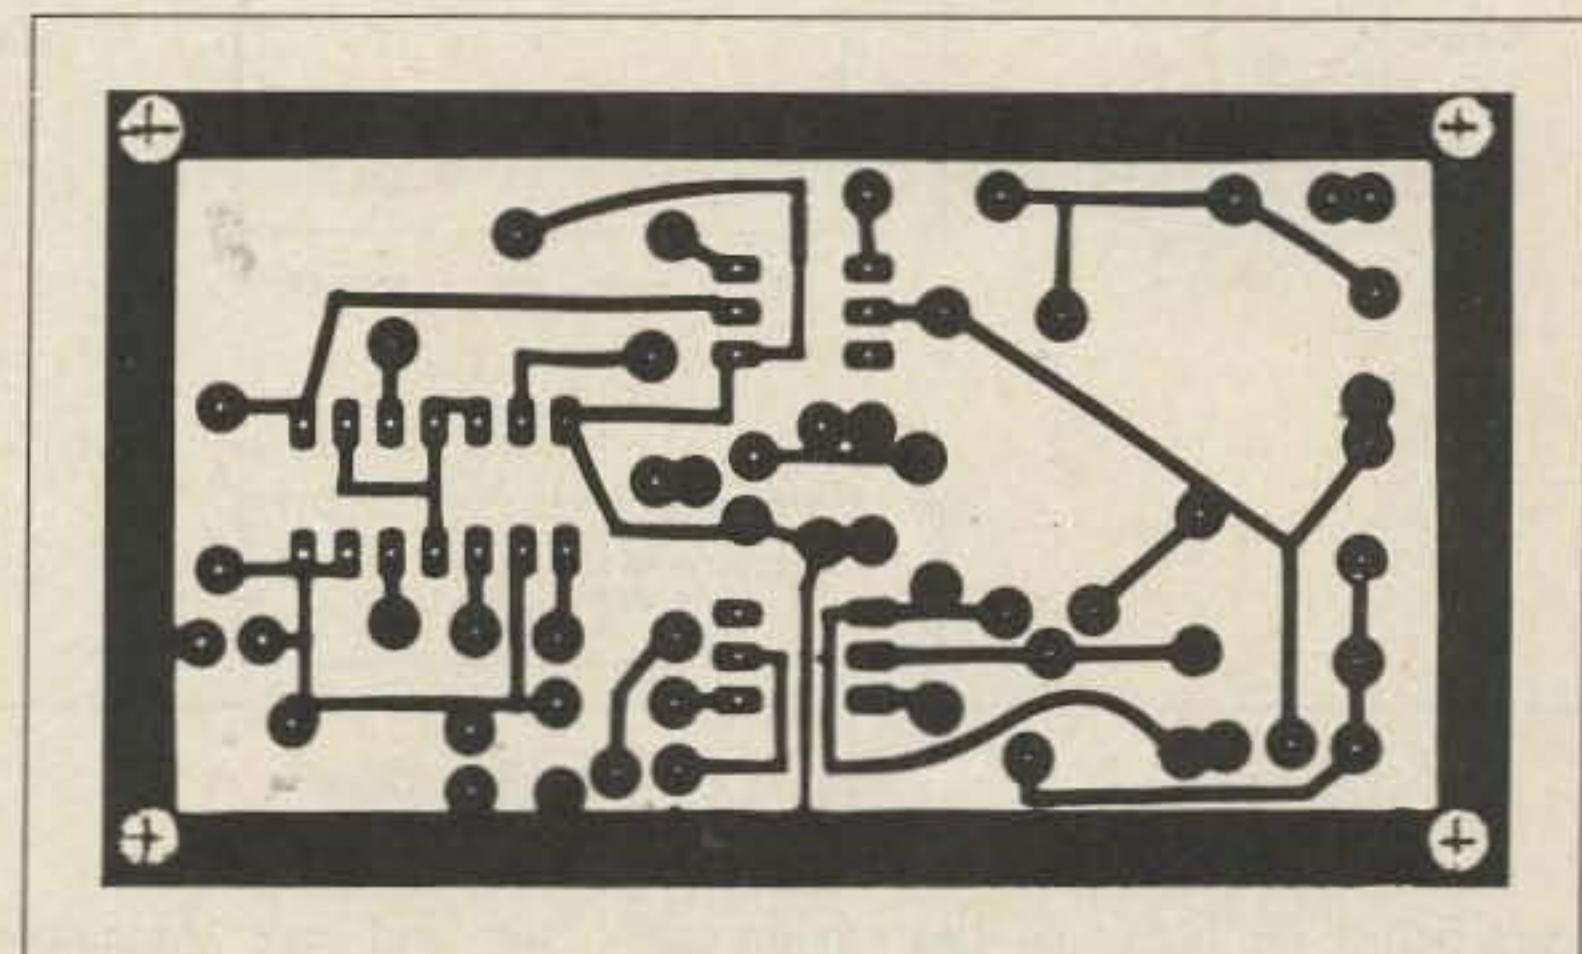


Fig. 3. Interface circuit board.

diode turns off and the phototransistor stops conducting.

When the photodiode switches off, pull-up resistor R7 develops a 5-volt level at pin 1 of U1. Gate U1A inverts the 5-volt level to a logic-0 voltage level. This signal appears at pins B and C on the edge connector.

D3 and D4 avert voltage-spike damage to components on the loop side of the interface. D2 protects the interface from accidentally reversed loop polarity.

The C-64 RS-232C port has full-duplex capability, but it cannot be paired with current-loop RTTY machines because the local loop is not a full-duplex circuit. A design feature of the project interface eliminates interference to received data caused by echoing.

When the control operator elects to transmit, the interface comes to attention with two responses. First, pin D on the edge connector gets a request to send in the form of a logic 1. This signal also appears on pin 12 of U1 (gate C), which inverts the signal. The output of gate C appears at pin 2 of U1 (gate A), which cuts off the output of this gate.

This latter feature prevents transmitted data from filling the C-64 receive buffer. Without it, the receive buffer will fill from the previous transmission and dump to the

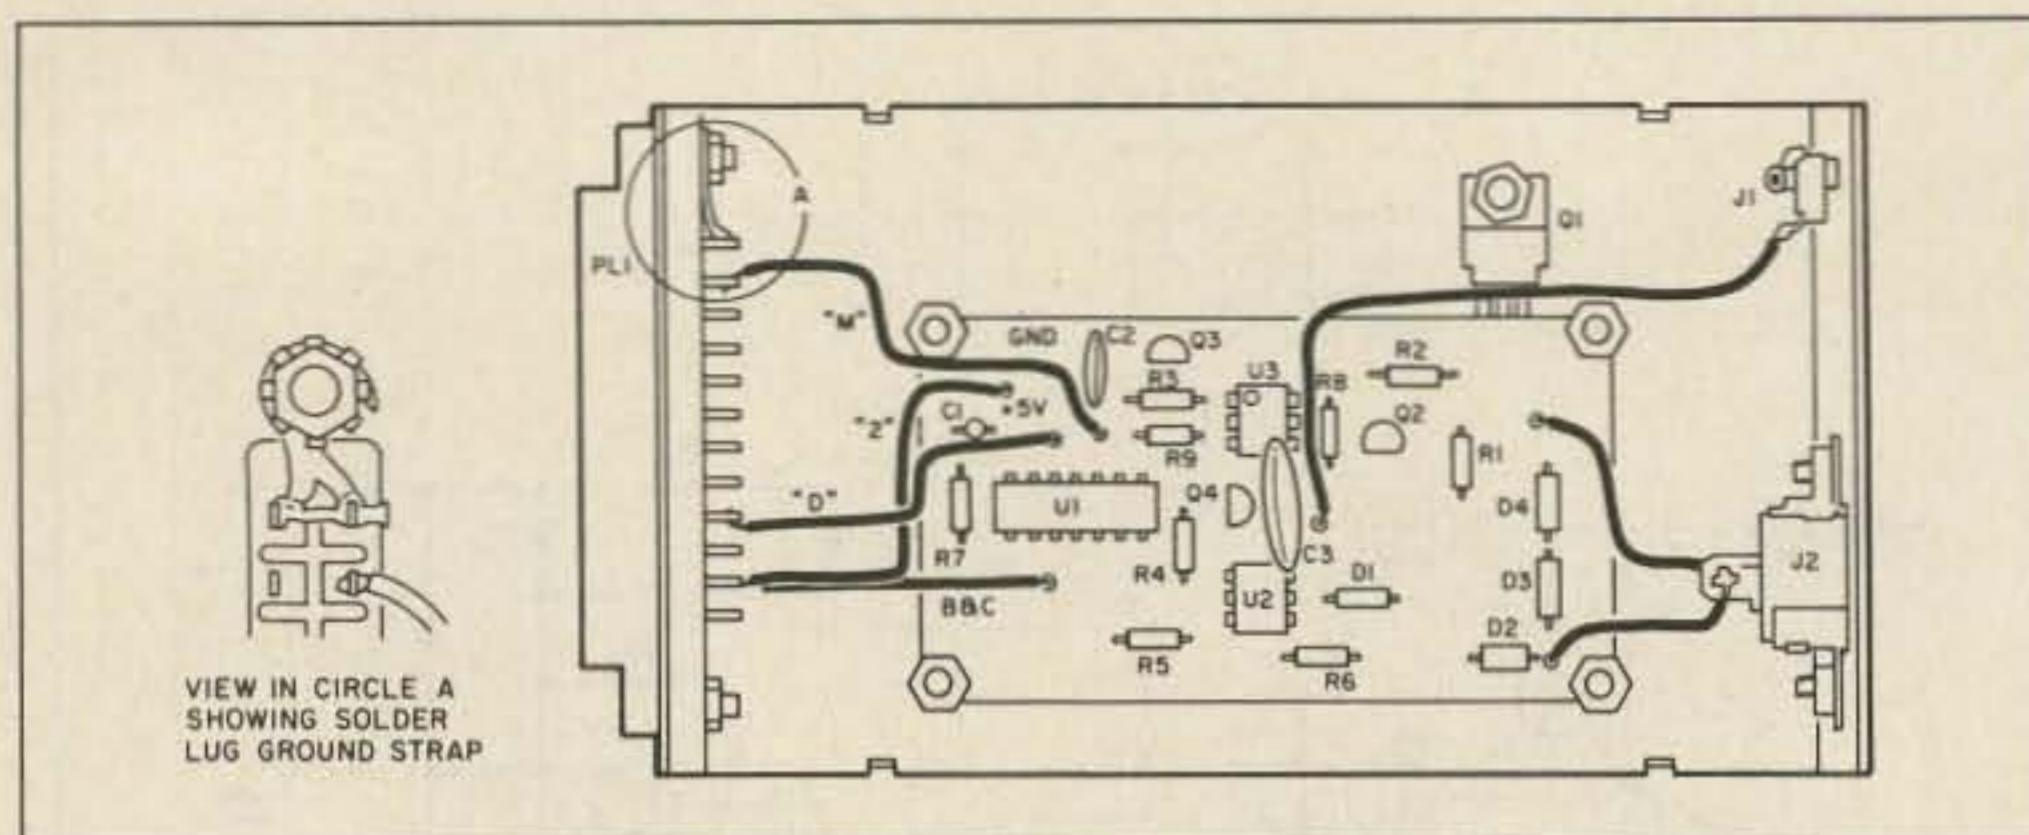


Fig. 4. Parts placement.

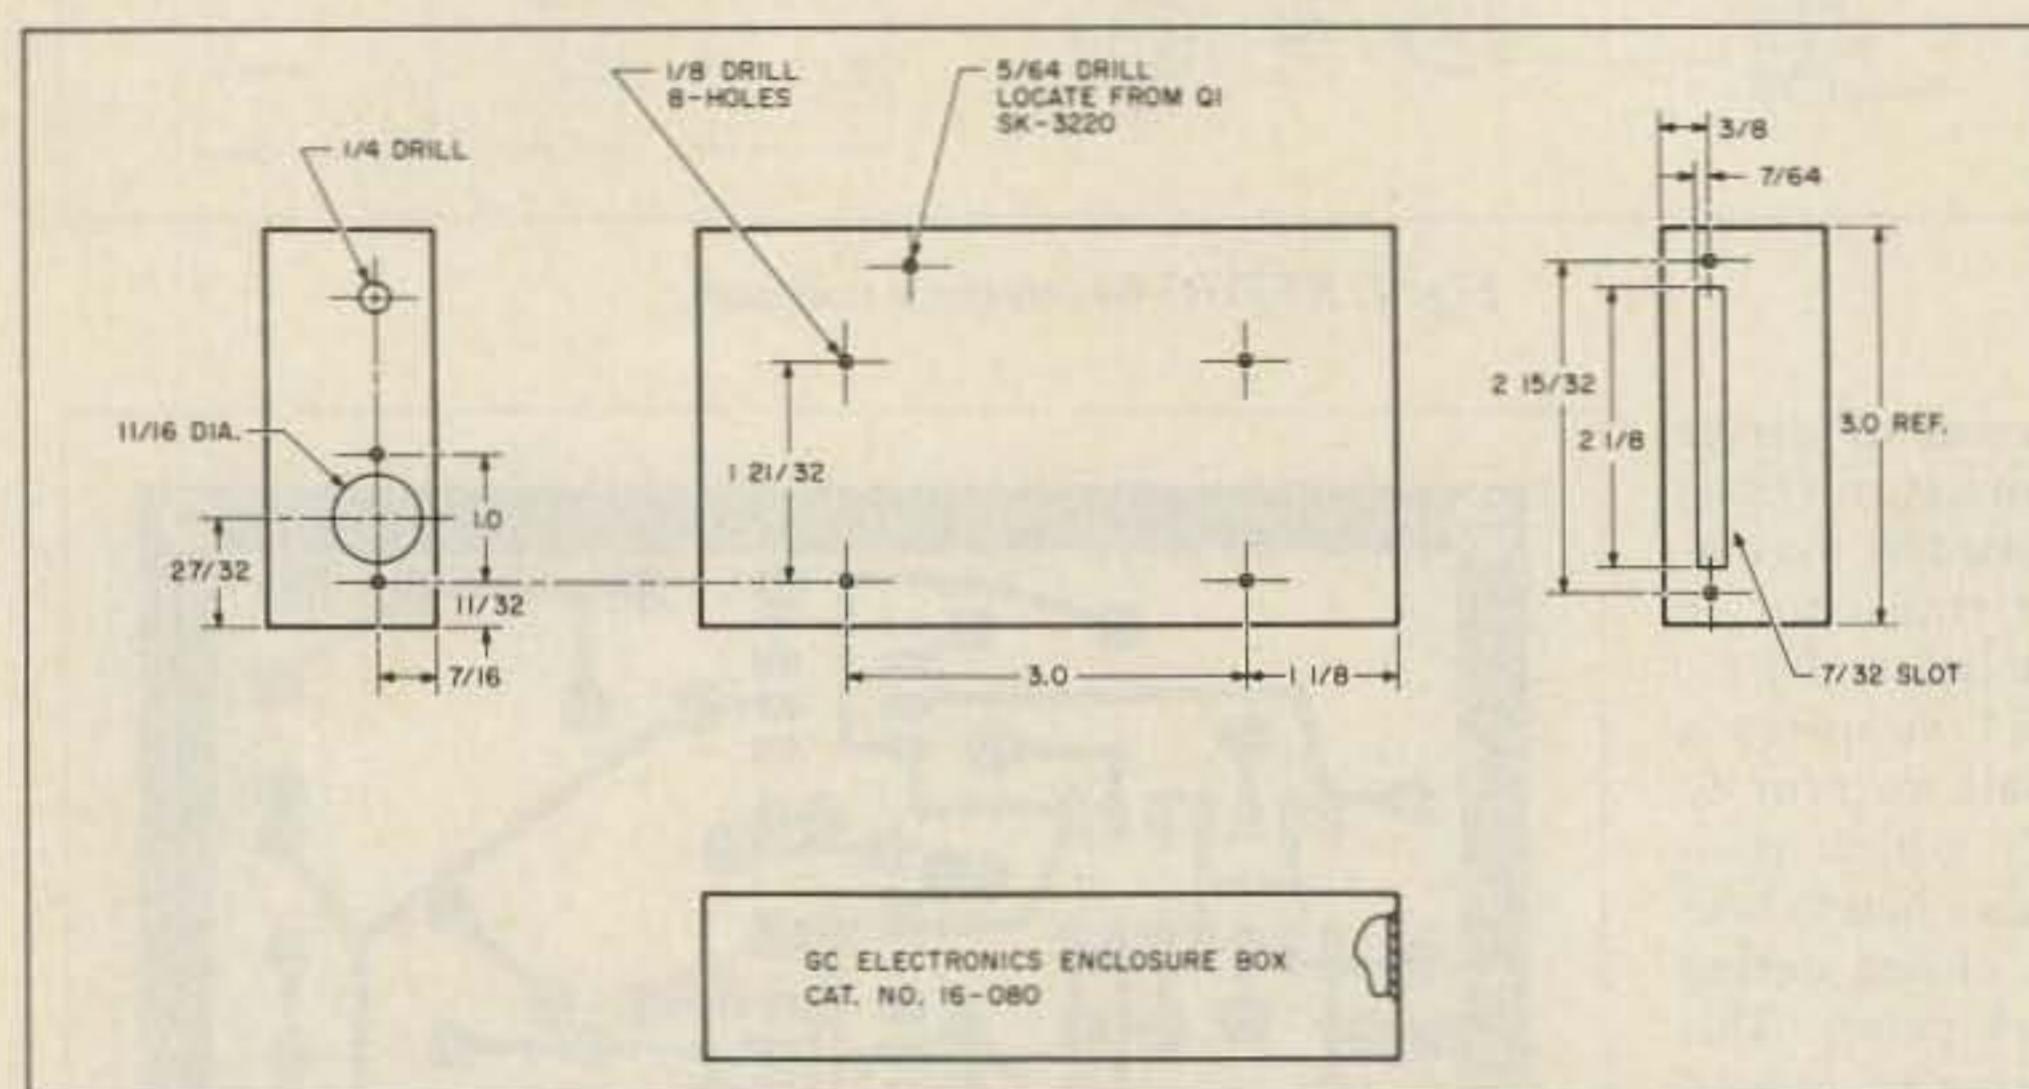


Fig. 5. Case modification.

screen before the incoming data stream can be reviewed.

An additional design feature utilizes an option available on most transceivers and transmitters for using the PTT line. With this feature, the transceiver can be controlled from the computer keyboard. This is done by transistor Q4, which is biased by U1B through current-limiting resistor R4. U1B inverts the logic 0 sent by U1C and turns on Q4. CR4 protects Q4 from the reverse EMF generated by relay coils in some radio equipment.

Q4 is heavy enough to switch on the PTT current in most rigs, but a PTT line with an open voltage greater than 20 volts will rate something heavier, such as the MPS-A42.

Putting It Together

First, use Fig. 3 and direct etching transfers (or your preferred method) to prepare the circuit board. Next, prepare the case by drilling the mounting holes (see below for details of Q1 mounting) and cutting clearance for the edge connector.

The etched and drilled board can be stuffed with abandon, except for the mounting of Q1. Dress Q1's leads as shown in Fig. 4 and proceed as follows: With the exception of Q1 and miscellaneous wires, all parts should first be assembled to the PC board. Special care must be taken with Q1 at this point to ensure a stress-free assembly of the PC board, transis-

tor, and case. Assemble Q1 and solder in place.

The PC board—with Q1 soldered in position—is mounted on the lower half of the box. Use spacers on the 4-40 screws as specified. The fasteners can be finger-tightened to stabilize the board temporarily.

Bend and adjust the leads of Q1 so that the mounting surface is in firm contact with the box and mark the location of the mounting hole. Remove the board and set it aside.

Drill a 9/64 hole for Q1 as marked. This completes machining of the case.

Complete the board assembly by soldering hook-up wires (3" lengths) to the circuit-board eyelets for connections to chassis and edge connector.

Before reinstalling the finished board on the box half, apply a light coating of silicone heat-sink compound to the mica insulator, the back of the transistor case, and the area around the mounting hole on the box cover. Next, with the insulator located between Q1 and the chassis, press Q1 firmly into place and, using 4-40 hardware plus the supplied plastic washer under the nut, fasten lightly. Q1 must be attached to its mounting surface with the insulating hardware packaged with SK-3220.

It is important that Q1 be mounted with care. Mechanically, a good fit is required, and electrically, the mounting tab on Q1 will be at collector potential and

Pin	Function
A, N	Ground
B	Received data
C	Receive data flag
D	Request to send
M	Transmit data
2	+5 volts
1, 12	Ground

Table 1.

therefore must be insulated from the chassis ground.

Complete the assembly by installing and wiring the edge connector and the loop connector receptacle. Take care when wiring the edge connector. Make a positive identification of each pin. Your computer's data-port chip will be directly connected to the project interface.

The interface is now ready for testing. *Incorrect wiring could damage your computer;* just follow the hook-up diagram and all will be well.

Testing the Interface

Warning! Open-loop supply voltages may exceed 150 volts. Before working with loop connections, be certain that related equipment is switched off.

Step 1 is a preliminary checkout and should be done before connection with the computer or the loop circuit is begun. First, check resistance from the +5 eyelet on the board to ground. This check should show an open circuit. A low reading that does not vary means that there is probably a construction or wiring error present.


Next, make a resistance check from ground to each loop connection and from ground to the mounting tab of Q1. All readings should indicate an open circuit. If the preliminary check is satisfactory, connect the interface to the loop.

The success of the next test will rely upon the presence of loop current. A stabilized 60 mA is optimum. If the loop current drops out, recheck the polarity by reversing the loop connections to the interface. If the loop current does not hold after checking polarity, the problem can most likely be traced to an error in component placement. If the loop current holds, it will be safe to assume that the loop-switching circuit is working.

Now plug in the interface at the user port and then switch on the power. Load and run the RTTY program.

A note about software. This project was designed with the KG3V package in mind. It is probable that software other than this will do as well or better. The KG3V program, however, is available free of charge and is in the public domain. The remainder of these test procedures will assume the KG3V software.

Select mode 0 and hit function key F1. Using a VOM, logic probe, or scope, check the potential on IC1, pin 12. This should be close to 5 volts. Check the potential on IC1,

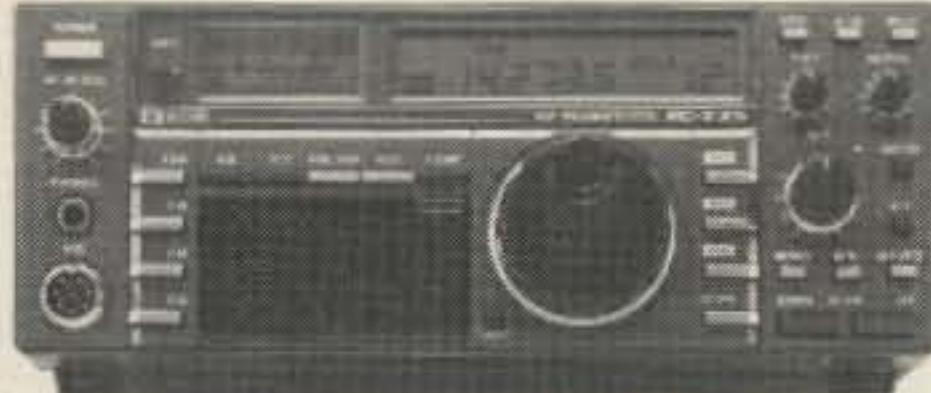

HF Equipment Regular SALE
 IC-735 HF transceiver/SW rcvr/mic 999.00 849⁹⁵
 PS-55 External power supply..... 199.00 179⁹⁵
 AT-150 Automatic antenna tuner... 445.00 359⁹⁵
 FL-32 500 Hz CW filter..... 66.50
 EX-243 Electronic keyer unit..... 56.00
 UT-30 Tone encoder 17.50



IC-745 9-band xcvr w/1-30 MHz rcvr 1049.00 899⁹⁵
 PS-35 Internal power supply 199.00 179⁹⁵
 EX-241 Marker unit 22.50
 EX-242 FM unit 44.00
 EX-243 Electronic keyer unit..... 56.00
 FL-45 500 Hz CW filter (1st IF) 66.50
 FL-54 270 Hz CW filter (1st IF) 53.00
 FL-52A 500 Hz CW filter (2nd IF) 108.00 99⁹⁵
 FL-53A 250 Hz CW filter (2nd IF) 108.00 99⁹⁵
 FL-44A SSB filter (2nd IF) 178.00 159⁹⁵



IC-751 9-band xcvr/1-30 MHz rcvr 1399.00 999⁰⁰
 IC-751A 9-band xcvr/1-30 MHz rcvr 1649.00 1399
 PS-35 Internal power supply 199.00 179⁹⁵
 FL-32 500 Hz CW filter (1st IF) 66.50
 FL-63 250 Hz CW filter (1st IF) 54.50
 FL-52A 500 Hz CW filter (2nd IF) ... 108.00 99⁹⁵
 FL-53A 250 Hz CW filter (2nd IF) ... 108.00 99⁹⁵
 FL-33 AM filter 35.25
 FL-70 2.8 kHz wide SSB filter 52.00
 RC-10 External frequency controller 39.25

Other Accessories: Regular SALE
 IC-2KL 160-15m solid state amp w/ps 1999.00 1699
 PS-15 20A external power supply.... 169.00 154⁹⁵
 PS-30 Systems p/s w/cord, 6-pin plug 299.00 269⁹⁵
 OPC Opt. cord, specify 2, 4 or 6-pin 10.00
 MB Mobile mount, 735/745/751A 24.50
 SP-3 External speaker 61.00
 SP-7 Small external speaker 49.00
 CR-64 High stab. ref. xtal (745/751) 63.00
 PP-1 Speaker/patch..... 159.25 149⁹⁵
 SM-6 Desk microphone 44.95
 SM-8 Desk mic - two cables, Scan.... 78.50
 SM-10 Compressor/graph EQ, 8 pin mic 136.25 124⁹⁵
 AT-100 100W 8-band auto. antenna tuner 445.00 389⁹⁵
 AT-500 500W 9-band auto. antenna tuner 559.00 489⁹⁵
 OPC-118 Adapts AT-100/500 to IC-735 16.00
 AH-2 8-band tuner w/mount & whip 625.00 549⁹⁵
 AH-2A Antenna tuner system, only... 495.00 429⁹⁵
 OPC-137 Adapts AH-2/2A to IC-751/745 16.00



ICOM

Check the Prices at AES®!

Other Accessories - continued: Regular SALE
 GC-4 World Clock (Closeout)..... 99.95 59⁹⁵
 GC-5 World clock 91.95
6-meter VHF Portable Regular SALE
 IC-505 3/10W 6m SSB/CW portable 549.00 489⁹⁵
 BP-10 Internal Nicad battery pack 89.00
 BP-15 AC charger 14.00
 EX-248 FM unit 55.50
 LC-10 Leather case 39.50

VHF/UHF base multi-modes Regular SALE
 IC-551D 80W 6-meter SSB/CW 799.00 699⁹⁵
 EX-106 FM option 140.00 126⁹⁵
 BC-10A Memory back-up 9.50
 IC-271A 25W 2m FM/SSB/CW 859.00 759⁹⁵
 AG-20 Internal preamplifier 64.00
 IC-271H 100W 2m FM/SSB/CW 1099.00 969⁹⁵
 AG-25 Mast mounted preamplifier... 95.00
 IC-471A 25W 430-450 SSB/CW/FM xcvr 979.00 869⁹⁵
 AG-1 Mast mounted preamplifier ... 99.50
 IC-471H 75W 430-450 SSB/CW/FM 1399.00 1169
 AG-35 Mast mounted preamplifier... 95.00

Accessories common to 271A/H and 471A/H
 PS-25 Internal power supply for (A)... 115.00 104⁹⁵
 PS-35 Internal power supply for (H)... 199.00 179⁹⁵
 SM-6 Desk microphone 44.95
 EX-310 Voice synthesizer 46.00
 TS-32 CommSpec encode/decoder.... 59.95
 UT-15 Encoder/decoder interface... 14.00
 UT-15S UT-15S w/TS-32 installed.... 92.00

VHF/UHF mobile multi-modes Regular SALE
 IC-290H 25W 2m SSB/FM, TTP mic... 639.00 569⁹⁵
 IC-490A 10W 430-440 SSB/FM/CW 699.00 599⁹⁵
VHF/UHF/1.2 GHz FM Regular SALE
 IC-27A Compact 25W 2m FM w/TTP mic 429.00 379⁹⁵
 IC-27H Compact 45W 2m FM w/TTP mic 459.00 399⁹⁵
 IC-37A Compact 25W 220 FM, TTP mic 499.00 439⁹⁵
 IC-47A Compact 25W 440 FM, TTP mic 549.00 489⁹⁵
 PS-45 Compact 8A power supply ... 139.00 129⁹⁵
 UT-16/EX-388 Voice synthesizer ... 34.99
 SP-10 Slim-line external speaker ... 35.99

IC-28A 25W 2m FM, UP/DN mic.... 429.00 379⁹⁵
 IC-28H 45W 2m FM, UP/DN mic.... 459.00 399⁹⁵
 IC-48A 25W 440-450 FM 459.00 399⁹⁵
 HM-14 TTP microphone 55.50
 UT-28 Digital code squelch 37.50
 UT-29 Tone squelch decoder 43.00
 HM-16 Speaker/microphone 34.00

IC-3200A 25W 2m/440 FM w/TTP... 599.00 499⁹⁵
 UT-23 Voice synthesizer 34.99
 AH-32 2m/440 Dual Band antenna ... 37.00
 AHB-32 Trunk-lip mount 34.00

Larsen PO-K Roof mount 20.00
 Larsen PO-TLM Trunk-lip mount... 20.18
 Larsen PO-MM Magnetic mount ... 19.63

RP-3010 440 MHz, 10W FM, xtal cont. 1229.00 1099
 IC-120 1W 1.2 GHz FM Mobile..... 579.00 499⁹⁵
 ML-12 1.2 GHz 10W amplifier 379.00 339⁹⁵
 IC-1271A 10W 1.2 GHz SSB/CW Base 1229.00 1079
 AG-1200 Mast mounted preamplifier 105.00
 PS-25 Internal power supply 115.00 104⁹⁵
 EX-310 Voice synthesizer 46.00
 TV-1200 ATV interface unit..... 129.00 119⁹⁵
 UT-15S CTCSS encoder/decoder ... 92.00

RP-1210 1.2 GHz, 10W FM, 99 ch. synth 1479.00 1299



Hand-held Transceivers
Deluxe models Regular SALE
 IC-02AT for 2m 399.00 339⁹⁵
 IC-04AT for 440 MHz 449.00 389⁹⁵
Standard models Regular SALE
 IC-2A for 2m 279.00 249⁹⁵
 IC-2AT with TTP 299.00 259⁹⁵
 IC-3AT 220 MHz, TTP 339.00 299⁹⁵
 IC-4AT 440 MHz, TTP 339.00 299⁹⁵
 IC-12AT 1W 1.2GHz FM HT/batt/cgr/TTP 459.00 399⁹⁵
 A-2 5W PEP synth. aircraft HT 569.00

Accessories for Deluxe models Regular
 BP-7 425mah/13.2V Nicad Pak - use BC-35 74.25
 BP-8 800mah/8.4V Nicad Pak - use BC-35... 74.25
 BC-35 Drop in desk charger for all batteries 74.95
 BC-16U Wall charger for BP7/BP8..... 20.25
 LC-11 Vinyl case for DLx using BP-3..... 20.50
 LC-14 Vinyl case for DLx using BP-7/8 20.50
 LC-02AT Leather case for DLx models w/BP-7/8 54.50
Accessories for both models Regular
 BP-2 425mah/7.2V Nicad Pak - use BC35 ... 47.00
 BP-3 Extra Std. 250 mah/8.4V Nicad Pak.... 37.50
 BP-4 Alkaline battery case 15.25
 BP-5 425mah/10.8V Nicad Pak - use BC35 58.50
 CA-5 5/8-wave telescoping 2m antenna 18.00
 FA-2 Extra 2m flexible antenna 11.50
 CP-1 Cig. lighter plug/cord for BP3 or DLx ... 13.00
 CP-10 Battery separation cable w/clip 22.50
 DC-1 DC operation pak for standard models 23.25
 EX-390 Bottom slide cap..... 5.50
 MB-16D Mobile mtg. bkt for all HTs..... 21.99
 LC-2AT Leather case for standard models.... 54.50
 RB-1 Vinyl waterproof radio bag 31.50
 HH-SS Handheld shoulder strap 16.95
 HM-9 Speaker microphone 47.00
 HS-10 Boom microphone/headset 23.25
 HS-10SA Vox unit for HS-10 & Deluxe only 23.25
 HS-10SB PTT unit for HS-10 23.25
 ML-1 2m 2.3w in/10w out amplifier ... SALE 99.95
 SS-32M Commspec 32-tone encoder 29.95
Receivers Regular SALE
 R-71A 100 kHz-30 MHz, 117V AC \$949.00 799⁹⁵
 RC-11 Infrared remote controller ... 67.25
 FL-32 500 Hz CW filter 66.50
 FL-63 250 Hz CW filter (1st IF) 54.50
 FL-44A SSB filter (2nd IF)..... 178.00 159⁹⁵
 EX-257 FM unit 42.50
 EX-310 Voice synthesizer..... 46.00
 CR-64 High stability oscillator xtal 63.00
 SP-3 External speaker..... 61.00
 CK-70 (EX-299) 12V DC option.... 12.25
 MB-12 Mobile mount..... 24.50
 R-7000 25 MHz-2 GHz scanning rcvr 1099.00 969⁹⁵
 RC-12 Infrared remote controller ... 67.25
 EX-310 Voice synthesizer..... 46.00
 AH-7000 Radiating antenna 89.95 (9)

HOURS • Mon. thru Fri. 9-5:30; Sat. 9-3

Milwaukee WATS line: 1-800-558-0411 answered evenings until 8:00 pm Monday thru Thursday.

WATS lines are for Quotes & Ordering only, use Regular line for other Info & Service dept.

All Prices in this list are subject to change without notice.

Order Toll Free: 1-800-558-0411 *In Wisconsin (outside Milwaukee Metro Area)* 1-800-242-5195

AMATEUR ELECTRONIC SUPPLY® Inc.

4828 W. Fond du Lac Avenue; Milwaukee, WI 53216 • Phone (414) 442-4200

AES® BRANCH STORES

Associate Store

WICKLIFFE, Ohio 44092
 28940 Euclid Avenue
 Phone (216) 585-7388
 Ohio WATS 1-800-362-0290
 Outside Ohio 1-800-321-3594

ORLANDO, Fla. 32803
 621 Commonwealth Ave.
 Phone (305) 894-3238
 Fla. WATS 1-800-432-9424
 Outside Florida 1-800-327-1917

CLEARWATER, Fla. 33575
 1898 Drew Street
 Phone (813) 461-4267
 No In-State WATS
 No Nationwide WATS

LAS VEGAS, Nev. 89106
 1072 N. Rancho Drive
 Phone (702) 647-3114
 No In-State WATS
 Outside Nevada 1-800-634-6227

CHICAGO, Illinois 60630
 ERICKSON COMMUNICATIONS
 5456 N. Milwaukee Avenue
 Phone (312) 631-5181
 Outside Illinois 1-800-621-5802

pin 10. The voltage reading on this pin should drop briefly to zero when the space bar is depressed. This drop in voltage certifies the presence of space intervals.

Check the voltage on R9 at the optoisolator connection (IC3). The results should be the same as those seen on IC1, pin 12. Return the meter probe to IC1, pin 12. The voltage should drop to near zero when function key F1 is depressed. Go to pin 11. This reading should also be close to 5 volts. Failure to get the voltage readings as specified will point first to a solder bridge on the PC board and then to a defective IC.

If everything checks out, it may be assumed that the interface is in good working order. Fire up the RTTY station and tune in a RTTY signal.

In mode 0 (60 wpm) receive, you should "see" any incoming print that is on the local loop. If there is a problem, check the voltage drop across D1. This should read 5.1 volts. The voltage drop across R6 should be close to 3.7 volts. Check across pins 1 and 2 (pin 1 positive, pin 2 negative) for a drop of 1.2 volts. A zero reading here indicates that IC2 is defective.

Before replacing IC2, recheck the values of R6, D1, and the local loop current, which should be 60 mA when closed. If all is well, hit the F1 function key once more and enter some spaces with the space bar. A printer on the loop (turn it on) should show spaces.

Troubleshooting problems with character transmission are best started at the optoisolator side of R9. Look for 4.7 volts on space. The collector of Q3 should go to near zero during the space interval. The voltage drop across pins 1 and 2 of IC3 will be difficult to see without a scope, but it should be close to 1.2 volts.

If the problem persists, check the voltage across pins 4 and 5 of IC3. With no output from the computer, it should be close to 0.7 volts. A reading of zero indicates that IC3 or Q2 is defective. Keep in mind that the voltages around Q1 and Q2 are at local-loop potential during space intervals. If at this point trouble still persists, check the orientation of D3 and D4.

Q1 can be checked by measuring the voltage drop across the emitter and base. A correctly functioning device will develop close to 0.7 volts when the 60-mA holding current is present; the drop across the collector and emitter will be very close to zero. During open loop periods, this latter voltage will approximate that of the open loop.

One last comment: The project interface will safely handle a loop-current level as high as 100 mA, but it should be avoided. ■

Parts List

Integrated Circuits

U1	7400 quad 2-input NAND gate TTL	Jameco	\$.29
U2, 3	4N25 optoisolator	Jameco	1.38

Transistors

Q1	SK-3220 high-voltage power output NPN	RCA	2.75
Q2	MPS-A42 high-voltage driver	Radio Shack	.69
Q3, 4	2N2222 general-purpose NPN	Jameco	.68

Diodes/Rectifiers

D1	IN4733 5.1-V, 1-Watt zener	Jameco	.22
D2-5	IN4006 HV 1 Amp	Jameco	.88

Capacitors

C1	.1-uF, 10-V tantalum	Radio Shack	.50
C2	.01-uF, 25-V disc	Radio Shack	.20
C3	.01-uF, 100-V disc	Radio Shack	.20

Resistors (1/4 Watt, 5%)

R1	1 megohm	Radio Shack	.10
R2	4.7k	Radio Shack	.10
R3, 4	22k	Radio Shack	.20
R5, 8	100k	Radio Shack	.20
R6, 9	470 Ohms	Radio Shack	.20
R7	4.7k	Radio Shack	.10

Hardware

J1	Mini-jack	Radio Shack 274-251	.40
J2	Multi-pin connector (Jones type)		
	two-pin male*	Radio Shack 274-201	
	Two-pin female	Radio Shack 274-202	1.79
	6" x 6" blank copper circuit board	Radio Shack	2.19
	Direct-etching dry transfers	Radio Shack 276-1577	2.59
	GC Electronics Chassis Box #16-080 (5-1/8 x 3 x 1-1/4)	Shand Electronics	4.07
	12/24 PC edge connector with solder eye terminal	Jameco 12/24SE	3.95
	Seven 3" lengths of #22 solid copper hook-up wire 100' spool	Radio Shack 278-1295	2.19
	#4 solder lug		.10
	60/40 rosin core solder PC type BPO dispenser model DS-1	Fordham Radio	.79

*Required for loop only.

Addresses: Digi-Key, Highway 32 South, Thief River Falls MN 56701; Jameco Electronics, 1355 Shoreway Road, Belmont CA 94002; Fordham Radio, 260 Motor Parkway, Hauppauge NY 11788; Shand Electronics Inc., 2401 Dort Highway, Flint MI 48503.

About Fasteners: The small quantity of fastening hardware required to hold this project together can no doubt be found in the nooks and crannies of most ham-radio workshops, and the cost will be nil. However, for those who are starting from scratch, the following items are available at hobby shops and hardware stores in small-quantity blister packs. Radio Shack catalog numbers are given here for these items. There will be plenty left for the next project.

64-3011 (14 pkg. #4-40 x 1/2 round-head machine screws)	.99
64-3018 (30 pkg. #4-40 machine hex nuts)	.99
Two 64-3024 (24 pkg. assorted spacers)	1.98
64-3022 (20 pkg. #4-40 flat washers)	.99
Nine #4-40 x 1/2 round-head machine screws	.45
Nine #4-40 machine nuts	.45
Two #4 flat washers	.10
Four #4 x 1/4 metal spacers	.40

CB-TO-10 METERS

We specialize in CB radio modification plans and hardware. Frequency and FM conversions, books, kits, repairs, high-performance accessories. Our 11th year! 16-page catalog, \$2.

CBC INTERNATIONAL, P.O. BOX 31500X
PHOENIX, AZ 85046


"INSTANT" MORSE CODE

BEGINNERS: Deliciously Easy

EXPERTS: Automatically Fast

CURLY CODE™ Manual ONLY \$6.50

GUARANTEED



Minds Eye Publications, Dept. S18
Suite 115-199
1350 Beverly Rd.
McLean, VA 22101

MULTI-BAND SLOPERS


ALSO: DIPOLES & LIMITED-SPACE ANTENNAS

4-BAND SLOPER - 160, 80, 40, 30, or 20M	60 ft. long	\$ 48 ppd
3 " " - 160, 80, 40M	60 ft. "	\$ 43 "
2 " " - 80, 40M	40 ft. "	\$ 35 "
3 " NO-TRAP DIPOLE - 160, 80, 40M	113 ft. long	\$ 71 "
2 " " " - 80, 40M	85 ft. "	\$ 55 "
9-BAND SPACE-SAVER DIPOLE - 160 thru 10M *	46 ft. long	\$ 85 ppd

* Requires wide-range tuner (80, 40, 20, 15M without tuner)

SEND SASE for complete details of these and other unique antennas

W9INN ANTENNAS 312-394-3414
BOX 393-S MT. PROSPECT, IL 60056

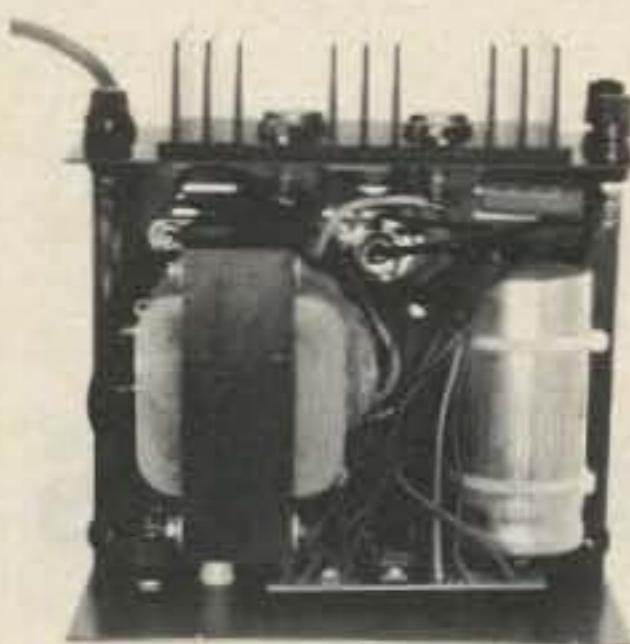

INSIDE VIEW - RS-12A



MODEL RS-50A



MODEL RS-50M



MODEL VS-50M

RM-A Series


MODEL RM-35A

RS-A SERIES


MODEL RS-7A

RS-M SERIES


MODEL RS-35M

VS-M SERIES


MODEL VS-20M

RS-S SERIES


MODEL RS-12S

19" X 5 1/4 RACK MOUNT POWER SUPPLIES

Model	Continuous Duty (AMPS)	ICS* (AMPS)	Size (IN) HXWxD	Shipping Wt. (lbs.)
RM-35A	25	35	5 1/4 x 19 x 12 1/2	38
RM-50A	37	50	5 1/4 x 19 x 12 1/2	50
• SEPARATE VOLT & AMP METERS				
RM-35M	25	35	5 1/4 x 19 x 12 1/2	38
RM-50M	37	50	5 1/4 x 19 x 12 1/2	50

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt (lbs)
RS-4A	3	4	3 3/4 x 6 1/2 x 9	5
RS-7A	5	7	3 3/4 x 6 1/2 x 9	9
RS-7B	5	7	4 x 7 1/2 x 10 3/4	10
RS-10A	7.5	10	4 x 7 1/2 x 10 3/4	11
RS-12A	9	12	4 1/2 x 8 x 9	13
RS-20A	16	20	5 x 9 x 10 1/2	18
RS-35A	25	35	5 x 11 x 11	27
RS-50A	37	50	6 x 13 3/4 x 11	46

- Switchable volt and Amp meter

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt (lbs)
RS-12M	9	12	4 1/2 x 8 x 9	13
RS-20M	16	20	5 x 9 x 10 1/2	18
RS-35M	25	35	5 x 11 x 11	27
RS-50M	37	50	6 x 13 3/4 x 11	46

- Separate Volt and Amp Meters
- Output Voltage adjustable from 2-15 volts
- Current limit adjustable from 1.5 amps to Full Load

MODEL	Continuous Duty (Amps) @13.8VDC@10VDC@5VDC	ICS* (Amps) @13.8V	Size (IN) H x W x D	Shipping Wt (lbs)
VS-20M	16 9 4	20	5 x 9 x 10 1/2	20
VS-35M	25 15 7	35	5 x 11 x 11	29
VS-50M	37 22 10	50	6 x 13 3/4 x 11	46

- Built in speaker

MODEL	Continuous Duty (Amps)	ICS* Amps	Size (IN) H x W x D	Shipping Wt (lbs)
RS-7S	5	7	4 x 7 1/2 x 10 3/4	10
RS-10S	7.5	10	4 x 7 1/2 x 10 3/4	12
RS-10L(For LTR)	7.5	10	4 x 9 x 13	13
RS-12S	9	12	4 1/2 x 8 x 9	13
RS-20S	16	20	5 x 9 x 10 1/2	18

Transistors On The Bias

Remember the last time you designed a transistor amplifier? The pile of parts that didn't work? Wells ends all that with this Basic amplifier-designer program.

Number 5 on your Feedback card

If you are an electronics tinkerer and a part-time computer hacker, you need this computer program. It was developed to manipulate the myriad of formulas surrounding one of electronics' most common building-block circuits, the class-A common emitter amplifier (shown in Fig. 1). Because of the flexibility of the circuit, there are infinite combinations of components that will work perfectly well. But what happens to the input impedance if you change the value of R2? Or output impedance when R3 is changed? The value of a computer becomes quickly apparent when you want to play what-if games with the circuit.

To use the computer program, five pieces of information must be entered: transistor beta (β_{fe}), maximum power dissipation, the resistance of R2, the power-supply voltage, and the lowest operating frequency. The most obscure of the five is power dissipation. This may be based upon the maximum device dissipation (spec value) or the maximum that is desired in a specific circuit application. Selection is the user's choice. If you are not familiar with how dissipation values affect the circuit, then working with V_{ce} vs. I_c characteristic curves (Fig. 2) for a typical junction transistor will provide the necessary data.

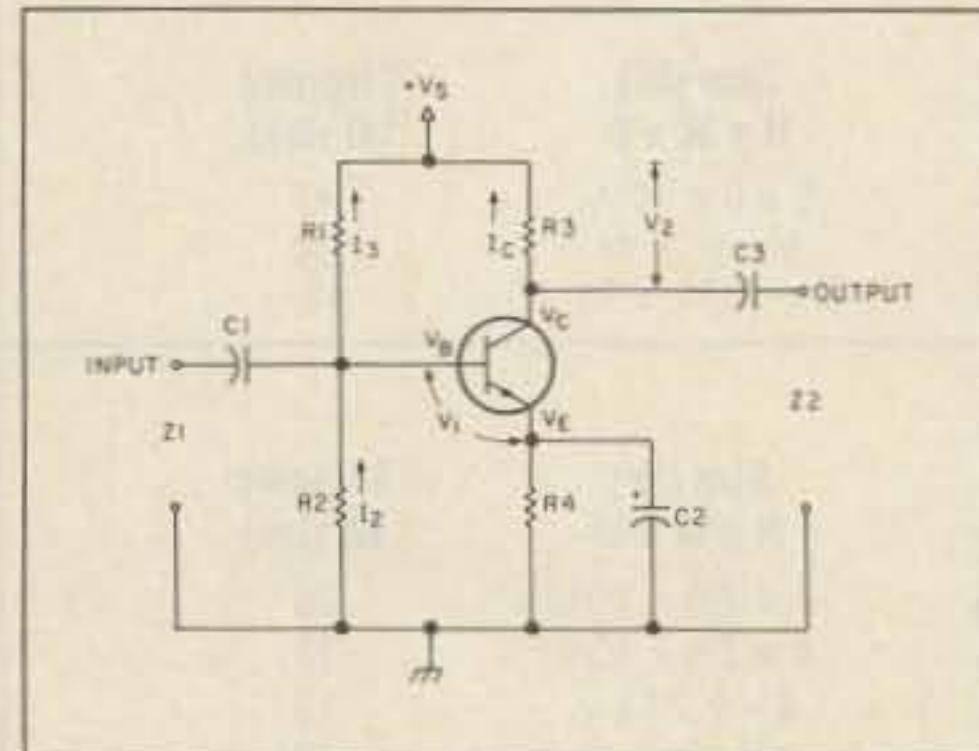


Fig. 1. Class-A common emitter amplifier.

The dotted line represents a constant power dissipation (P_d) and is determined by the product of V_{ce} and I_c at each intersecting point along the curve. All transistors have a maximum dissipation value, but it is not necessarily desirable to operate them at the maximum value in every circuit application. In fact, device reliability (and longevity) can be improved by operating to the left side of the maximum power dissipation curve established by the manufacturer.

Circuit Variables

The selection of maximum power dissipation and the power-supply voltage (V_s) will determine the dc loadline for the circuit. The loadline is like a railroad track in that it establishes an operating path for the transistor within the circuit. All transistor circuit voltages and currents intersect along the loadline, establishing the circuit operating parameters. As an example, a specific collector current and voltage drop between the collector and emitter of the transistor may be found at the loadline intersection with a specific base current value.

For class-A amplifiers, the base current value is selected to provide a quiescent operating point (QOP) such that the collector voltage value will be one half of the power-supply voltage. Placing QOP at the point equal to one half V_s provides a nearly equal signal swing for both positive and negative signal excursions before peak amplitude distortion occurs. QOP is the zero-signal resting point on the loadline. Resistor R1 determines the base current value, which is used to establish the QOP position on the loadline.

The position of the loadline at location A, B, or C is selected by the amount of power dissipation chosen. Selecting one value over another is a matter of choice based upon various alternatives. In general, the lower the loadline is, the higher the input and output impedances will be. Obviously, though, circuit values are in parallel with the impedance of the respective circuit and will restrict the impedance range variation obtained.

Resistor R2 has the most direct effect on the input impedance, while R3 has the most effect on the output impedance. Signal linearity and gain also are affected by the loadline position. Lowering the loadline will tend to raise the transfer gain. However, signal linearity may be degraded. Therefore, how is the position of the loadline to be selected?

The usual way is to use the cut-and-try technique to work out the circuit values to achieve the desired results. Another technique is to examine the transistor curves and associated formulas to find the desirable circuit values for a given transistor and circuit application. With your help in selecting input data, the computer will work with the formulas, making circuit analysis very easy.

Before starting the analysis, choose a power dissipation value between 1/4 and 1/2 of the transistor's rated dissipation. Some circuits operate at 1/20 of the rated P_d , but in any case, the P_d is chosen to satisfy the cir-

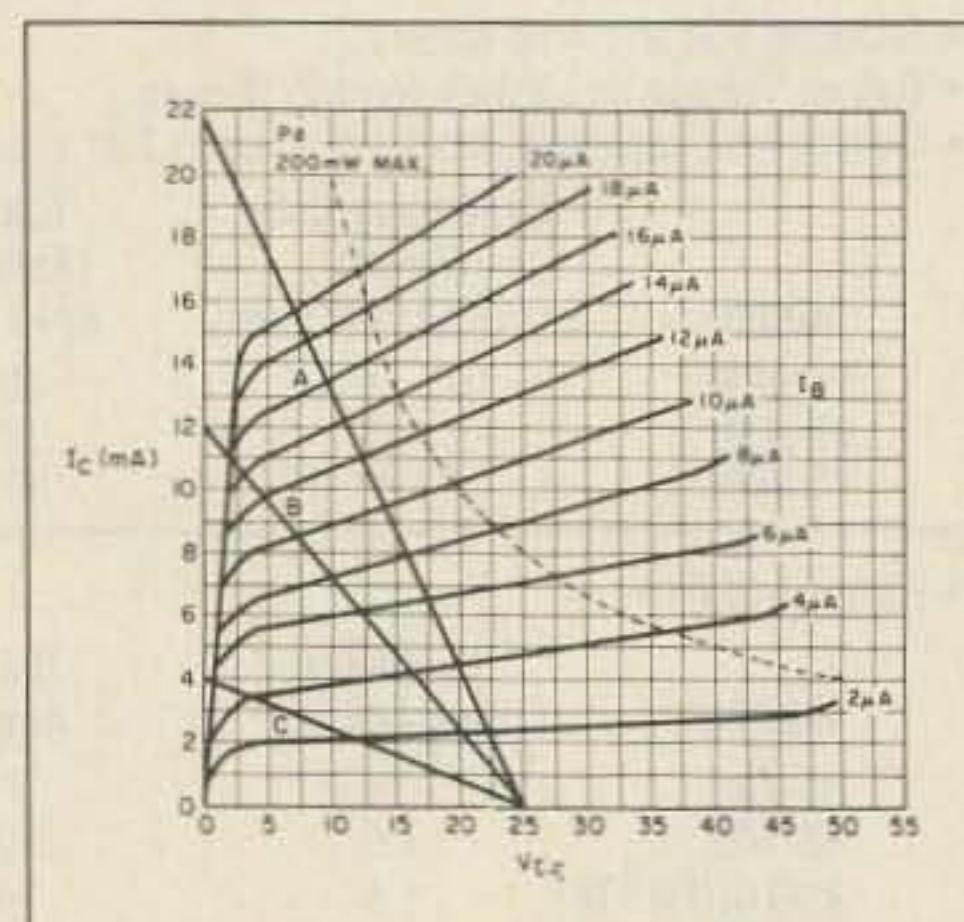


Fig. 2. V_{ce} vs. I_c characteristic curves.

B	Transistor beta
C	Temporary capacitor variable
C1	Input capacitor value
C2	Emitter bypass capacitor value
C3	Output capacitor value
F	Frequency
G	Gain
I	Collector current print variable
IB	Base current
IC	Collector current
I2	R2 current
I3	R1 current
P	Selector variable
P1	Power dissipation
R1	Base-VS resistor
R2	Base-ground resistor
R3	Collector-VS resistor
R4	Emitter-ground resistor
T	Temporary variable
VB	Base-ground voltage
C	Collector-ground voltage
VE	Emitter-ground voltage
VS	Power-supply voltage
V1 + V2	Emitter-base voltage
X	Reactance variable
Z1	Input impedance
Z2	Output impedance

Table 1. Program variables.

cuit application. Typical transistors—such as 2N2222, 2N4401, 2N2907, and 2N4403—have a maximum power dissipation rating of 310 mW in free air. When properly heat-sinked, the 2N2222 will dissipate up to 1.8 Watts reliably. However, in most applications, the usual "free-air" dissipation is considerably less than 310 mW, allowing the circuit impedance to rise along with a reduced power-supply current drain. An advantage of the computer program is that a variety of circuit conditions may be examined quickly in order to find component values to meet the application requirements.

A value for R2 may be selected in many ways. However, the proper way would be to select it to be approximately twice the value of the desired input impedance. There is no real detriment to selecting an R2 value that is too high except that bias stability may be affected. If R2 is too low, the resulting low-input impedance (Z1) requires more drive power from the preceding circuit. However, the actual ratio of R2 current to base current is not critical as long as bias stability exists. By rule of thumb, current through R2 should be at least 10 times higher than I_B .

The Program

To keep the operator-entered data to a minimum, a few assumptions have been made. The first was to establish an emitter voltage at 10% of the power-supply voltage. Doing so allows the emitter resistor value to rise sufficiently for stable biasing and prevents thermal runaway. Thermal runaway may occur if the emitter-to-ground voltage value is allowed to approach the base-emitter voltage value (0.7 volts for silicon devices).

The second program assumption is that the

```

10 REM DEVELOPED BY HUGH WELLS - 3/86
20 PRINT CHR$(125):REM CLEAR SCREEN/HOME
30 PRINT :PRINT " TRANSISTOR DESIGN PROGRAM FOR"
40 PRINT " CLASS-A SMALL SIGNAL AMPLIFIERS."
50 PRINT :PRINT "ENTER THE DATA AS REQUESTED."
60 PRINT :PRINT "TYPICAL BETA (HFE) VALUE ";:INPUT B
70 PRINT "MAX PWR DISSIPATION IN MW ";:INPUT P1:P1=P1*10^A-3
80 PRINT "ENTER 1=SILICON 2=GERMANIUM ";:INPUT T
90 PRINT "DESIRED SOURCE VOLTAGE ";:INPUT VS
100 VE=0.1*VS:REM CALCULATES Emitter VOLTAGE
110 IF T=1 THEN V1=0.7:REM SILICON
120 IF T=2 THEN V1=0.3:REM GERMANIUM
130 V2=VS-VE:REM CALCULATES VOLTAGE ACROSS R3
140 PRINT "ENTER LOWEST OPERATING FREQ (20-300)"
150 PRINT "FOR 3 DB ROLL-OFF ";:INPUT F
160 R3=((0.5*V2)^2)/P1:REM CALCULATES COLLECTOR LOAD
170 PRINT "SELECT BASE-GND RESISTOR VALUE"
180 PRINT "(1K-100K) ";:INPUT R2
190 IC=(0.5*V2)/R3:REM CALCULATES COLLECTOR CURRENT
200 R4=VE/IC:REM CALCULATES Emitter RESISTOR
210 R4=INT(R4*10+0.5)/10
220 IB=IC/B:REM CALCULATES BASE CURRENT
230 VB=V1+VE:REM CALCULATES VOLTAGE AT BASE
240 VC=VS-(R3*IC):REM CALCULATES COLLECTOR VOLTAGE
250 I2=VB/R2:REM CALCULATES R2 CURRENT
260 I3=I2+IB:REM CALCULATES R1 CURRENT
270 R1=(VS-VB)/I3:REM CALCULATES UPPER BASE RESISTOR
280 Z1=(R2*(B*R4))/(R2+(B*R4)):Z1=INT(Z1):REM CALCULATES INPUT Z
290 Z2=R3/4:Z2=INT(Z2):REM CALCULATES OUTPUT Z
300 X=Z1/4:GOSUB 370
310 C1=C:C1=INT(C1*100)/100:REM INPUT CAPACITOR VALUE
320 X=R4/5:GOSUB 370
330 C2=C:C2=INT(C2*100)/100:REM Emitter BYPASS CAP VALUE
340 X=Z2/4:GOSUB 370
350 C3=C:C3=INT(C3*100)/100:REM OUTPUT CAPACITOR VALUE
360 GOTO 380
370 C=(0.159*10^6)/(F*X):RETURN
380 G=0.6*B:REM APPROXIMATE CIRCUIT GAIN
390 PRINT CHR$(125):REM CLEAR SCREEN/HOME
400 PRINT "TYPICAL VALUES FOR CLASS-A OPERATION."
410 PRINT :PRINT "TRANSISTOR TYPE IS ";
420 IF T=1 THEN PRINT "SILICON."
430 IF T=2 THEN PRINT "GERMANIUM."
440 PRINT "TRANSISTOR BETA (HFE) = ";B
450 PRINT "PWR SUPPLY (VS) = ";VS;" VOLTS"
460 I=INT(IC*100000+0.5)/100
470 PRINT "COLLECTOR CURRENT (IC) = ";I;" MA"
480 PRINT "MAX PWR DISSIPATED = ";P1;" WATTS"
490 R1=INT(R1)
500 PRINT "R1 (BASE-VS) = ";R1;" OHMS"
510 PRINT "R2 (BASE-GND) = ";R2;" OHMS"
520 R3=INT(R3*10+0.5)/10
530 PRINT "R3 (COL-VS) = ";R3;" OHMS"
540 PRINT "R4 (EMITTER-GND) = ";R4;" OHMS"
550 PRINT "LOWEST OPER. FREQ. = ";F;" HZ"
560 PRINT "C1 (INPUT CAP) = ";C1;" UF"
570 PRINT "C2 (EMITTER BYPASS) = ";C2;" UF"
580 PRINT "C3 (OUTPUT CAP) = ";C3;" UF"
590 PRINT "APPROX INPUT Z = ";Z1;" OHMS"
600 PRINT "APPROX OUTPUT Z = ";Z2;" OHMS"
610 PRINT "APPROX CIRCUIT GAIN = ";G
620 VB=INT(VB*100+0.5)/100
630 PRINT "VOLTAGE AT BASE = ";VB;" VOLTS"
640 VC=INT(VC*100+0.5)/100
650 PRINT "VOLTAGE AT COLL = ";VC;" VOLTS"
660 VE=INT(VE*100+0.5)/100
670 PRINT "VOLTAGE AT EMIT = ";VE;" VOLTS"
680 PRINT "TO RUN AGAIN, ENTER 1=Y 2=N ";:INPUT P
690 IF P<>2 THEN RUN
700 PRINT CHR$(125):PRINT :PRINT "           COME AGAIN SOMETIME"
710 PRINT :PRINT :PRINT "           BYE BYE!!!":PRINT :PRINT :PRINT

```

Program listing.

application transfer gain will be approximately 60% of the device's beta value. The actual transfer gain can be found only by working with actual device curves and/or the h_{ie} parameter.

A third assumption involves the lowest frequency of operation. It is assumed that the reactance of each capacitor in the circuit will be nearly equal to its relative circuit impedance. Capacitor C1 would then have the same reactance as the input impedance at the lowest operating frequency, causing half of the input signal voltage to be dropped

across the capacitor. The other half would be dropped across the amplifier's input. Capacitor value determination using this technique provides a calculated rolloff of about 3 dB (half power) or less at the lowest operating frequency.

The program was developed using generalized Basic to allow easy entry into the greatest number of types of computers. In addition, program variables are listed in Table 1, and remark statements are used abundantly within the program to help the user follow through the program steps. ■

No Free Lunches

The grail of perpetual motion has eluded scientists for thousands of years—are we on the brink of discovery?

Number 6 on your Feedback card

Beyond their practical involvement in technology, hams have very naturally maintained interest in the tenets of science and physics—in particular, those matters relating to the uses of energy. Without the various exploitations and transformations of energy, electricity and electronics would have remained but laboratory curiosities.

It is no wonder, then, that the patent office has long been plagued by alleged inventions of "free lunches"—the on-the-spot creation of energy and its corollary, perpetual motion. Surprisingly, however, this is not the exclusive realm of the ignorant, the irrational, or the scientific illiterate. When one probes beneath the superficialities of this subject, both quacks and eminent physicists are found in the mix. Indeed, there appears to be a gray area between the possible and the impossible wherein "practical" perpetual motion merits consideration even if the academic purist's version is unattainable.

For example, the nuclear derivation of energy from a pound of uranium so greatly exceeds the energy available from the combustion of a pound of coal that it is almost suggestive of magic. Compared to the more familiar energy processes, the nuclear utility

station can be viewed as a practical approach to energy creation. Similarly, solar energy conversion systems operate for practical purposes, as if energy were being created.

We know, of course, that the pound of uranium—as well as the sun—must ultimately run down as a direct consequence of releasing its energy. So, even though "true" perpetual motion, or nondepleting energy, must remain a fantasy, untapped abundances in nature lure the adventurous in spirit, and it is not improbable that useful and practical compromises might result from seekers of the free lunch. Such things as fuel cells and vehicles operated from the kinetic energy stored in rapidly rotating flywheels come to mind.

Although the patent office automatically rejects perpetual-motion machines, it would accord an inventor an open-minded evalua-

tion if only he would bring along a *demonstrable model*. A common excuse tendered by the alleged inventor of a perpetual-motion machine is that his prototype is not yet ready for demonstration because certain refinements must be made to eliminate unanticipated friction (see Fig. 1 for an example). How sad and how true! Let's look further into this matter and see what various free-lunch proponents and critics have said and done.

Gems of Wisdom From the Experts

A classical defense of the pursuit of perpetual motion and on-the-spot creation of energy stems from the obvious fact that there was once a first-time demonstration of the various inventions we now take for granted. Therefore, declare those who thus remind us of this, there will someday be a first-time demonstration of a perpetual-motion machine! And, though we may refute such statements with logical arguments, our position is likely to be weakened by reminders of past opinions voiced by experts who should have known better.

What makes such reminders particularly embarrassing is that these experts seem to have widely missed the mark in their own field of expertise. When the weatherman or the stockbroker calls the shots incorrectly, we tend to be tolerant and forgiving, but not so when the scientist gives us wrong directions. Yet, it is entirely possible for an expert in any field to cough up erroneous predictions. After all, we forget that whatever notable achievements underlie his fame and recognition, they were reached only after he discarded many mistaken judgments; we shouldn't be harsh with him for advancing just another mistaken judgment.

When Lord Kelvin was president of the Royal Society, he adamantly let it be known that "heavier-than-air flying machines are impossible." And a notable mathematician of the era ground out some elegant equations showing that such an accomplishment was indeed in violation of natural law. It was later found that his analysis also indicated that the bumblebee was incapable of flight. Fortunately, neither the bee nor the Wright brothers were versed in such high mathematics. And then Nobel prize winner Robert Millikan put to rest the hopes of forward-looking physicists by stating: "There is no likelihood

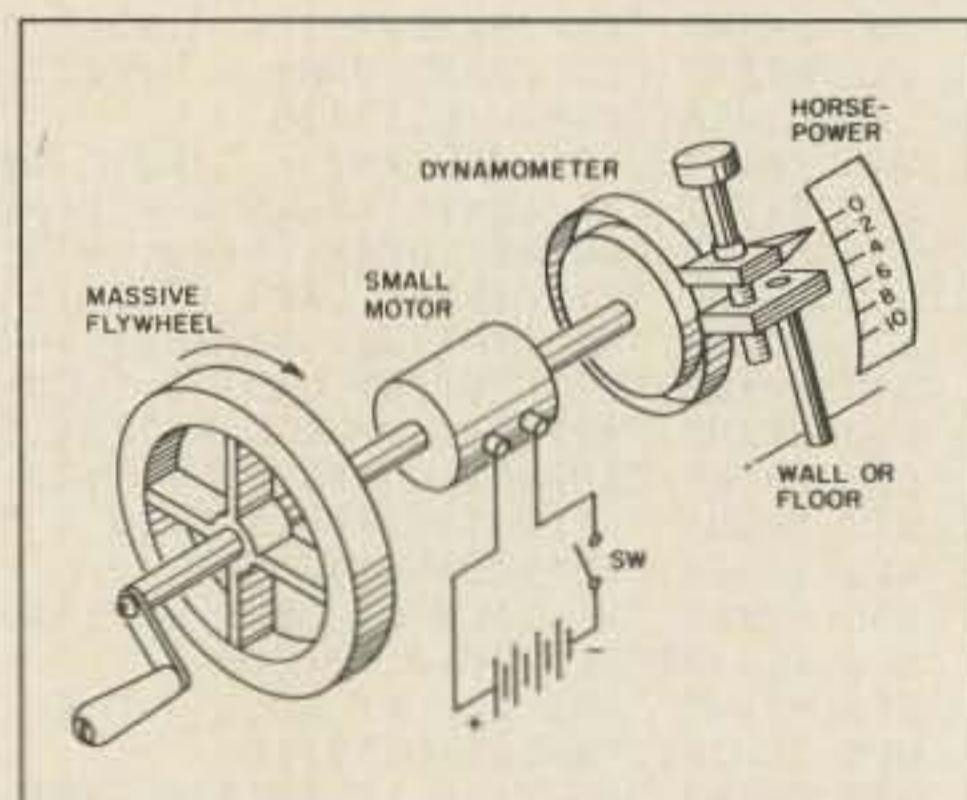


Fig. 2. The "Garabed," an alleged free-energy system. The claim and interpretation were predicated on the following demonstration: 1) The flywheel is manually set in rotation. 2) The switch, SW, is closed, energizing a small motor of 1/25 horsepower or so. 3) Because the small motor supplies frictional losses, the flywheel turns at a constant speed. 4) The dynamometer is adjusted so that the brake lining grips the rotating drum; it is observed that a maximum output indication of about 10 horsepower occurs briefly before the system comes to a halt. 5) Interpretation is made that 1/25 horsepower was multiplied to 10 horsepower as a manifestation of the "free energy" provided by the system. But, momentary high-power does not mean that the output energy exceeds the total energy imparted to the flywheel.

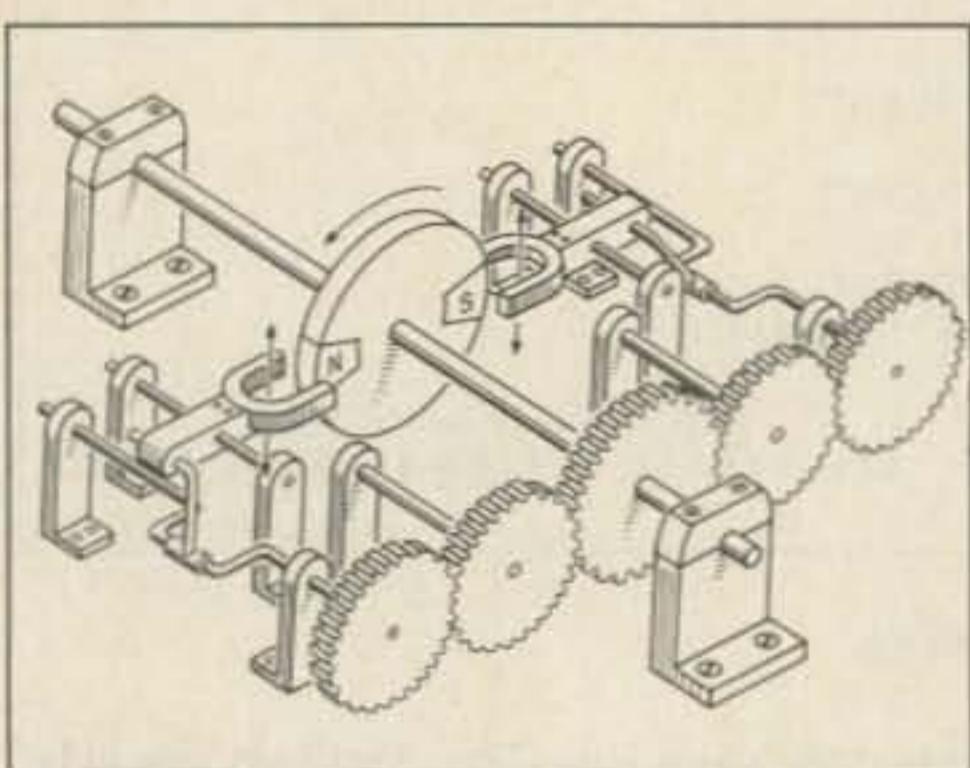


Fig. 1. Hitherto, attempts to secure continuous rotation in motors using only magnets have not been successful. An obstacle has been a condition of latchup wherein the arrangement quickly comes to a standstill after very limited motion. In this invention, a mechanical-feedback system is claimed to prevent such stoppage. The inventor promises to demonstrate such a self-running motor as soon as certain frictional losses can be reduced to a satisfactory level.

that man will ever tap the power of the atom." Topping both, the 1899 director of the U.S. patent office declared: "Everything that can be invented has been invented."

It obviously behooves us to be tough-minded in demanding proof of a claim that may strike us as far-fetched; at the same time, true open-mindedness is a requisite. Otherwise, it might be to our everlasting embarrassment that we failed to recognize an Edison or an Einstein because of our self-righteous notion of the possible and impossible. Even the charlatans and the self-deluded deserve due consideration; the practice will serve us in good stead when the real McCoy comes along.

The Garabed: Delusion Despite Sincerity

Perpetrators of fraud that many alleged inventors of perpetual motion are, some deserve credit as accomplished magicians; as with the stage magician who saws the pretty girl in half, it just ain't so! Often, there is a concealed colleague-in-crime turning a crank in another room, or there are hidden wires supplying the electrical energy, which seemingly originates from nothing.

Such was not the case with a notable proponent of free energy, Garabed Giragossian. This sincere, but scientifically deluded inventor claimed in 1917 that he had discovered a means of providing humanity with inexhaustible energy instantly available for any purpose. Because he mistrusted the patent office, he requested special protection from Congress instead of filing a patent. With the aid of influential supporters of his claim, the requested protection was granted in 1918 in the form of a public resolution. The resolution, however, was conditional on the premise that the free-energy device had to pass the scrutiny of an appointed commission of engineers and scientists. This it failed to do.

It is particularly interesting to examine the nature of Giragossian's machine, for his mistaken interpretations are commonly made in patent applications, and are continually encountered in basic science classrooms. The Giragossian machine was essentially a massive flywheel coupled to a tiny electric motor (see Fig. 2). The demonstration commenced by having an assistant turn a crank until the flywheel was turning at a respectable rate. Then the motor was turned on. Instead of gradually losing speed and ultimately stopping, the flywheel now proceeded to run continuously at a constant speed. This, of course, was because the tiny electric motor provided just the required power to overcome the frictional and windage losses, which otherwise would have slowly eroded the spinning motion of the flywheel.

So far, so good—no claims were made on this aspect of the machine, which incidentally was called the "Garabed." It was in the next step of the demonstration that this sincere, but miscalculating inventor purported to see evidence of free energy. With the flywheel spinning at a constant rate, he dumped its kinetic energy into a brake-type dynamometer, which briefly indicated about 10 horsepower. The flywheel, of course, quickly

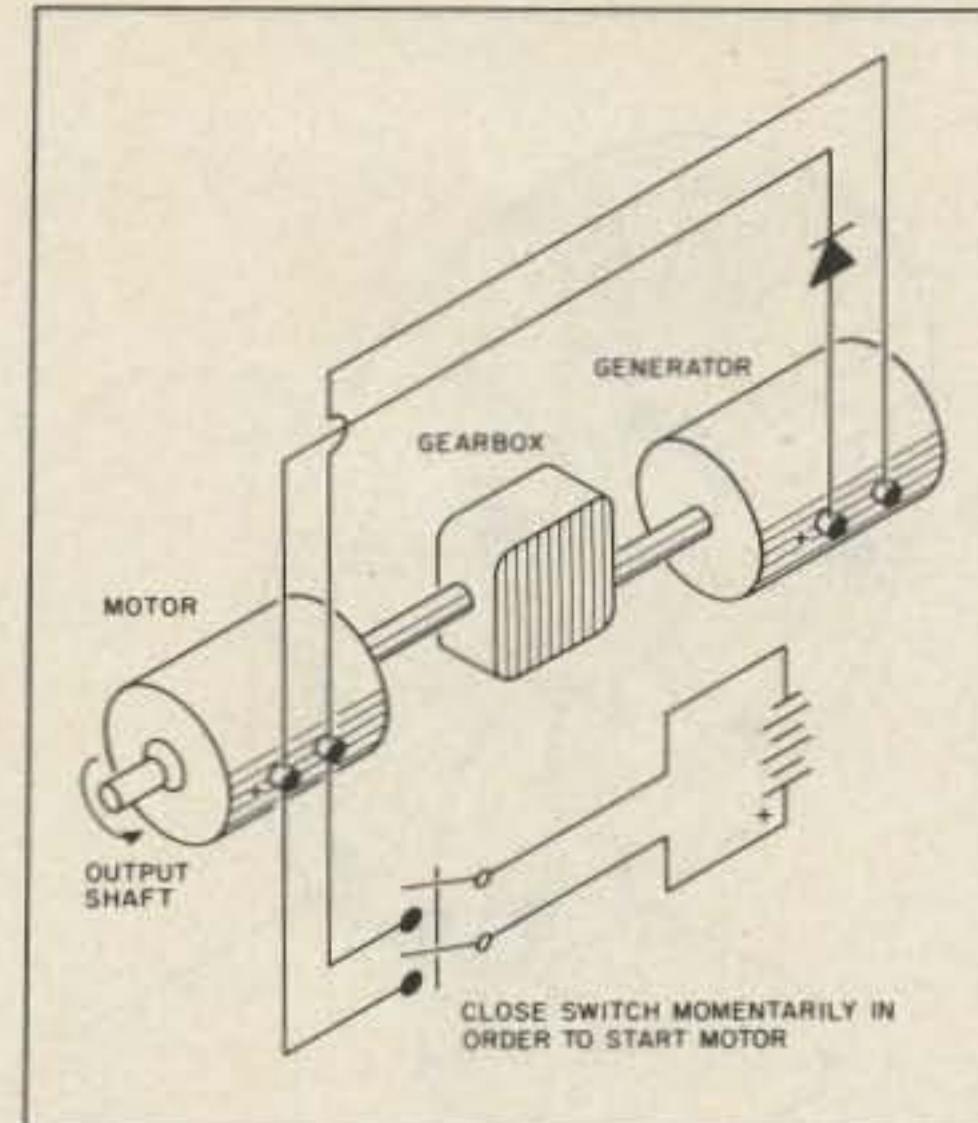


Fig. 3. A representative arrangement of motor-generator perpetual-motion systems. Hopefully, once the motor is operating, its continued operation will be sustained from the output of the generator. The switch, dc source, and the rectifier comprise the startup circuit. Hopefully, too, the gear box ascertains that the motor will be able to drive the generator fast enough to develop high output from the generator.

came to a standstill, having dissipated its energy into the frictional brake of the dynamometer. Giragossian's interpretation was that the Garabed had multiplied the output of the fractional horsepower motor to 10 horsepower.

High Power Does Not Always Imply High Energy

Where did the fervent and sincere Giragossian err? It was simply his inability to distinguish between energy and power. Most certainly, he did succeed in stepping up available power, which is the *rate of using energy*. We can do the same thing in charging a large capacitor from a low-power source of direct current. If we allow sufficient time for the capacitor to charge fully, a very powerful, but short-duration discharge can be produced by shorting its terminals.

Such a miniature lightning stroke does indeed develop more heat, light, sound, and air ionization (that is, more *power*) than might be had by shorting the terminals of the dc supply. Unfortunately, however, the charged capacitor is an inferior supplier of *energy* compared to the dc supply. As a matter of fact, it always turns out that about one-half of the energy supplied during charging is dissipated in whatever resistance may be involved in the charging circuit.

The manifestation of high power by itself does not suffice to identify it as a source of high energy; what may be lacking is the capability of delivering high power over an *extended period of time*. Both the capacitor and Giragossian's flywheel fail in this respect because they quickly lose their power-generating feature.

Another version of Giragossian's approach to the free lunch involves an electric motor

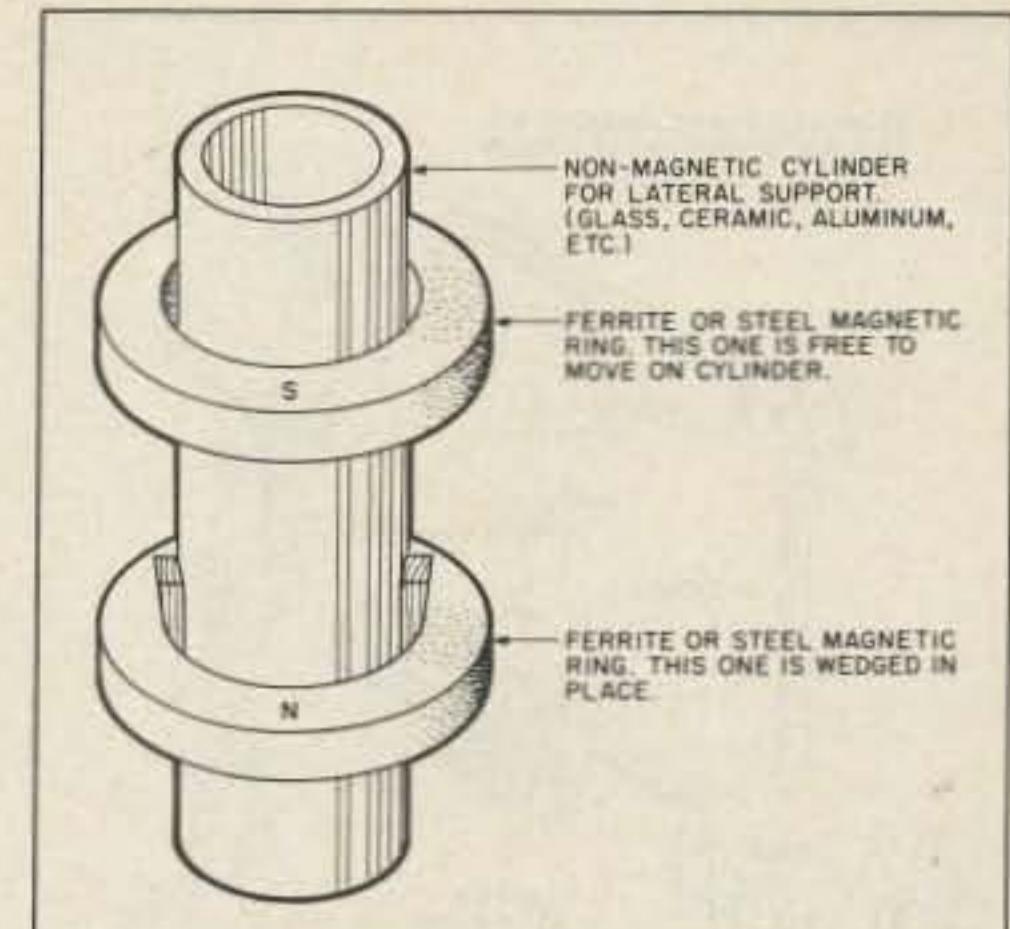


Fig. 4. A "food-for-thought" experiment. No external energy supply is needed for the levitated ring. The upper ring remains levitated indefinitely; neither ring loses magnetic strength. The constant repulsive force from the north poles of the magnetic rings overcomes gravity. If this experiment were simulated by electromagnets, it is obvious that electrical energy would have to be supplied (but only to overcome Ohmic resistance).

and generator system in which the motor is supposed to drive the generator, which in turn powers the motor, which in turn drives the generator, etc. Not only is it hoped that the system will sustain its own operation, but it is supposed to also deliver useful work to the external environment.

Sometimes elaborate gear trains are imposed between motor and generator so that the increased speed of the generator will suffice to overcome frictional losses. But, no matter how such inventors fool around, they ultimately find they cannot fool nature and her immutable laws. In simple language, the energy output of a machine is always less than the energy input.

It is truly remarkable how much energy pursuers of the free lunch will expend to defeat nature's energy law. Before the electrical age, the popular approach to perpetual motion was some manner of unbalanced wheel; in the process of turning, a wheel would somehow experience continual disturbances in weight acting around its rim so that a turning torque was continually applied (see Fig. 3). No contraption of this kind ever remained in sustained motion. Indeed, the more mechanical sophistications applied, the more inherent friction was incurred and the quicker the wheel ground to its inevitable halt!

Mad Inventors or Optimists?

It is always profitable to try to see the other fellow's point of view. What motivates the seeker of the free lunch? Aside from the hoaxer, it turns out that this field may indeed be worthy of study, effort, and experimentation.

Consider, for example, some means of liberating the energy of atomic nuclei that does not also liberate a host of radioactive isotopes, as happens in nuclear fission. Such an accomplishment would make available

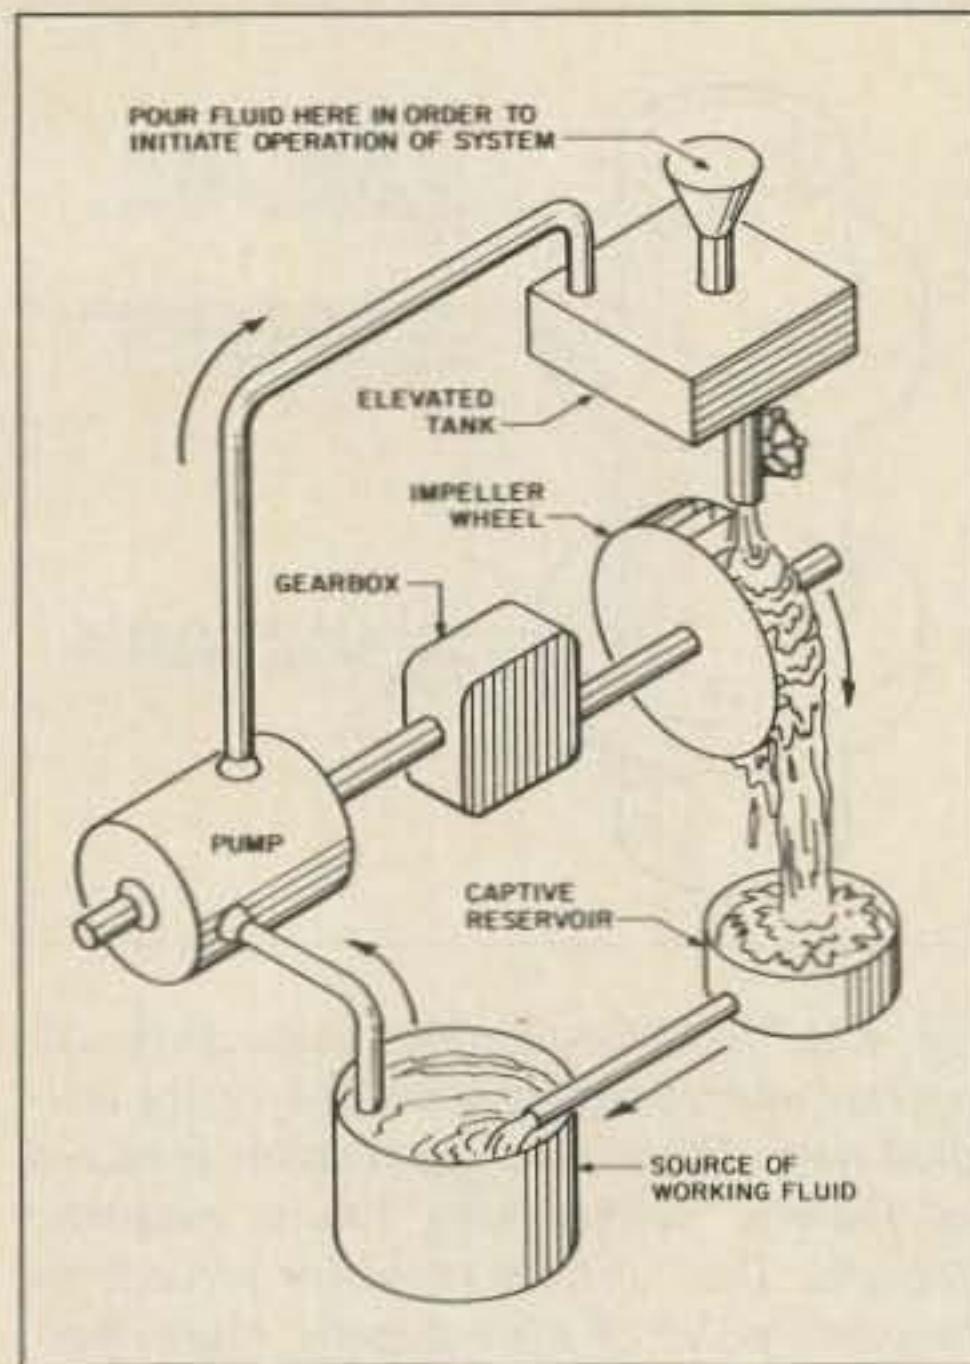


Fig. 5. Basic theme of many hydraulic perpetual-motion systems. Operation of a closed-cycle system is supposed to be self-sustained after initial startup. The gear box represents inventor's attempt to obtain more vigorous pumping action, thereby "fooling" the system to overcome its losses.

tremendous amounts of usable energy in a relatively clean process.

This is exactly what is being sought in the fusion-technique experiments presently being carried out. If they are successful, it will be possible to extract much of the world's energy from sea water. From a practical standpoint, such an accomplishment will certainly be an *almost-free* lunch. Who knows, perhaps some obscure inventor may come up with an alternate, but simpler means of bringing about fusion than the elaborate systems presently being investigated by teams of eminent scientists?

It is understandable that would-be inventors of nearly free-lunch machines might be misled by statements of definitions commonly found in technological texts. For example, the formula Efficiency = Output Power/(Input Power + Losses) is usually OK in the context in which it is used. It might, however, be better to replace the word power with "energy," in which case there could be no misinterpretation. The possible trouble with the power equation is that it does not involve *time*, as does energy. This allows one to deal with a hypothetical system or machine in which a large peak, or short-duration power, is available at the output, thereby creating the illusion that the operation exceeds 100%.

The Lure of Magnets

Magnets and magnetism have long exerted an irresistible mystique for the pursuers of inexhaustible energy or motion. Indeed, several simple manifestations of magnetism are not easily explained to the satisfaction of those who purport to see possibilities beyond already attained achievements. An electric generator delivers electrical energy as a con-

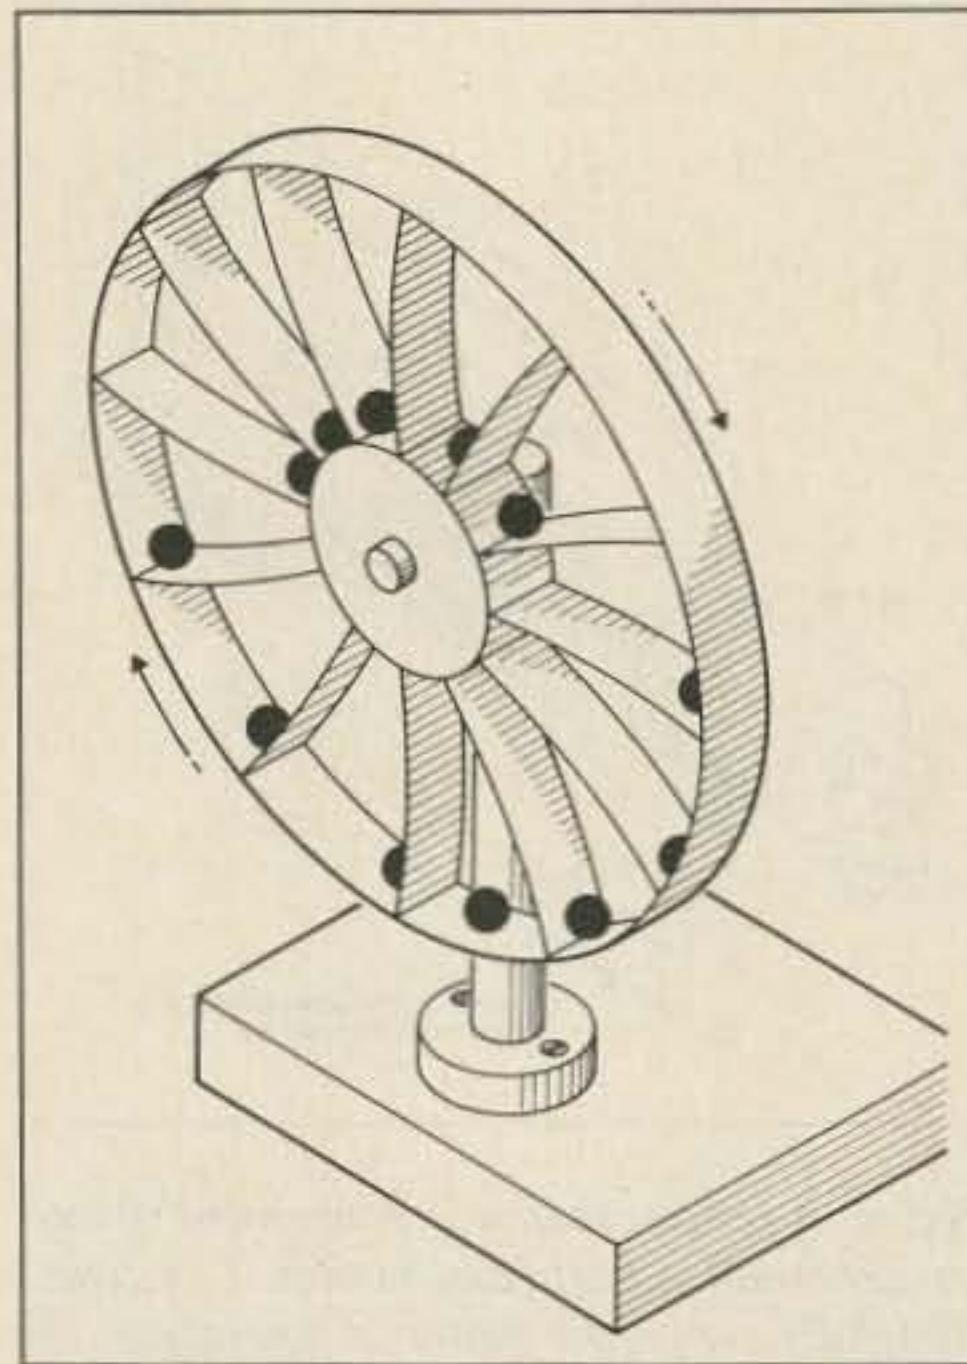


Fig. 6. Perpetual-motion wheel for providing free energy from gravity. This is a typical application of the unbalanced or over-balanced wheel. The radius arm of the steel balls is supposed to shift in such a manner as to keep the wheel turning.

sequence of the mechanical energy used in turning it. However, the intermediary function of magnetism is bothersome to some; particularly intriguing is the fact that a permanent magnet in a simple dc generator does not "run down." To those who think in this manner, the electrical energy seemingly is provided by the magnetic field, and the mechanical energy input to the generator just happens to be one way of extracting this energy via our crude technology.

Another aspect of magnetic behavior is the observation that a steel ball or roller will be drawn to a magnet, often with great force at the time of actual impact. Why, then, not arrange a circular pattern of magnets and rotating members to produce continuous rotation—a magnetic motor, so to speak? This turns out to be a real brain teaser, for no matter how the scheme is implemented, the rotational motion is short-lived. Obviously, something must be done at the instant of lockup in order to enable further rotation. But what?

Surprisingly, the publishers of *Science & Mechanics*, generally an excellent treatise on technology, featured on the cover of their Spring 1980 edition an artist's rendition of a remarkable home power-plant utilizing a 15-horsepower "magnetic motor" to drive a 5,000-Watt generator. The inventor actually received a patent for the underlying principle. Yet, such a scheme seems to violate fundamental precepts of physics, thermodynamics, and energy conservation. Were such a scheme and such a machine actually feasible, all aspects of modern civilization would undergo an instantaneous quantum jump in global living standards, the like of which has not yet been experienced or even imagined.

Finally, those who try to coax magic out of

magnets are intrigued by the phenomenon of levitation. Put two magnetized rings of ferromagnetic material on a supportive rod of non-magnetic material and, providing the fields are in opposition, one ring will remain indefinitely levitated above the other (see Fig. 4).

The classical explanation is that this is no big deal—no motion is involved, so no work is being done. However, the fact that the force of gravity is overcome by the interaction of the two fields points to a possible free lunch for those so inclined to see things that way. Here, the question as to why the magnetism is not depleted by the continuous "effort" may not engender a soul-satisfying answer.

Closed-Cycle Fluid Systems

The observation that falling water can pack a wallop harks back to an era when artificially kindled fire and the wheel were high technology. Not long after Archimedes invented a means of pumping water from a lower to a higher elevation, it was only natural for him to rig up a system that was supposed to operate in a self-sustaining manner. His scheme comprised the pump mechanically coupled to a water wheel. The pump was supposed to transport water to a higher level, whereupon it was allowed to fall on the water wheel, which then kept the pump going, as well as the entire system—it was hoped (see Fig. 5). But there was no cry of "Eureka!" for the contraption utterly frustrated this otherwise great intellect.

To give credit where due, Archimedes did devise a clever pump for his day. This consisted of a pipe in the shape of a helix. Dipping one end of the helix into a vessel of water and turning it would pump water to a higher level. Today, would-be inventors continue to repeat Archimedes' failed experiment using more sophisticated pumps, modern water wheels, gear boxes, and other components calculated to help fool nature. None, however, has yet been heard to exclaim, "Eureka!"

Unbalanced Wheels

If you spin the front wheel of an upside-down bicycle, the long duration of rotation can easily exceed expectation. What we have here is a finely balanced wheel pivoted on inordinately low friction bearings. Observations of this kind have long inspired seekers of perpetual motion to try to add some gimmick to such a wheel in order to enable it to turn indefinitely. The popular approach is to induce unbalance in such a way as to continually apply turning torque to the spokes or rim of such a wheel (see Fig. 6 for one example).

Much ingenuity has been displayed in such endeavors; yet each and every perpetual-motion wheel thus far built has disappointingly failed to make its inventor rich and famous. Indeed, a new law of nature has been suggested by such endeavors: The more elaborate the scheme for automatically unbalancing the tuning wheel, the more quickly it grinds to its inevitable halt!

Although planets spin for eons and electrons apparently spin forever, wheels all too quickly respond to the dissipative effect of

WE SHIP WORLDWIDE

Barry Electronics Corp.

WORLD WIDE AMATEUR RADIO SINCE 1950

Your one source for all Radio Equipment!

BARRY ELECTRONICS



Gobble Up Our Thanksgiving Savings

See You at Deal/Neptune, NJ Nov. 2nd
See You at W. Orange, NJ Nov. 16th

KENWOOD



TS440S/AT, R-5000, R-2000, TS-940 S/AT
TM-201B, TR26/3600A, TM2570A/50A/30A

TR-751A Kenwood Service/Repair
TH21/31/41AT, TM-211A/

411A & TS-711A/811A

TM-3530A

COMPU-FIRE EXTINGUISHERS
EXL-5000E RTTY/AMTOR TERMINAL

VoCom/Mirage/Daiwa
Tokyo Hy-Power
Amplifiers &
5/8λ HT Gain
Antennas IN STOCK



48 Watts, \$68

MICROLOG-ART 1, Air Disk,
SWL, Morse Coach

KANTRONICS

UTU, Interface II, UTU-XT,
KPC2400, Packet Comm. II

EIMAC

3-500Z

572B, 6JS6C

12BY7A &

4-400A

BIRD


Wattmeters &
Elements
In Stock

AEA 144 MHz
AEA 220 MHz
AEA 440 MHz
ANTENNAS



AMERITRON AMPLIFIER AUTHORIZED DEALER

Yaesu FTR-2410, Wilson
ICOM IC-RP 3010 (440 MHz)
ICOM IC-RP 1210 (1.2 GHz)

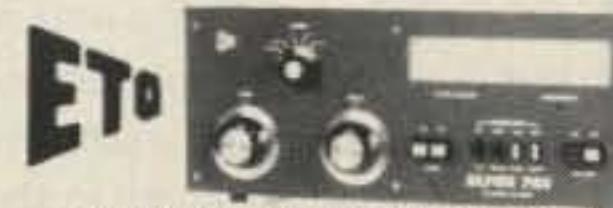

ALPHA AMPLIFIERS

Complete Butternut Antenna
Inventory In Stock!

DIGITAL FREQUENCY COUNTERS

Trionyx Pro-Corn Engineering
Model TR-1000 0-1 GHz 1200HH
0-600 MHz 0-1.3 GHz 1296HH

Long-range Wireless
Telephone for export in stock

BENCHER PADDLES,
BALUNS, AUDIO FILTERS,
IN STOCK

MIRAGE AMPLIFIERS
ASTRON POWER SUPPLIES
Saxton Wire & Cable

SANTEC
ST-222/UP
ST-20T
ST-442/UP
HT-7




Nye MBV-A
3 Kilowatt Tuner



Ten-Tec Tuner 229A
MFJ Models
422, 313, 989B, & 941D

SANGEAN Portable Shortwave Radios

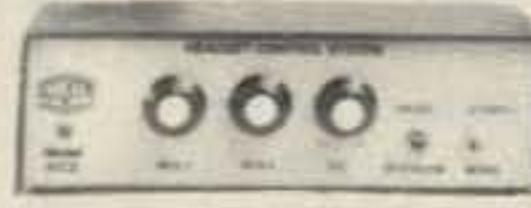

HEIL
EQUIPMENT
IN STOCK



New TEN-TEC
Corsair II, Argosy II, Century 22, 2510 RX-325

Tri-Ex Towers
Hy-Gain Towers
& Antennas, and
Rotors will be
shipped direct to
you FREE of
shipping cost.

MAIL ALL ORDERS TO BARRY ELECTRONICS CORP., 512 BROADWAY, NEW YORK CITY, NY 10012.

New York City's

LARGEST STOCKING HAM DEALER
COMPLETE REPAIR LAB ON PREMISES

"Aqui Se Habla Espanol"

BARRY INTERNATIONAL TELEX 12-7670
MERCANDISE TAKEN ON CONSIGNMENT
FOR TOP PRICES

Monday-Friday 9 A.M. to 6:30 P.M. Thursday to 8 P.M.
Saturday & Sunday 10 A.M. to 5 P.M. (Free Parking)

AUTHORIZED DISTS. MCKAY DYMEK FOR
SHORTWAVE ANTENNAS & RECEIVERS.

IRT/LEX-"Spring St. Station"

Subways: BMT-"Prince St. Station"

IND-"F" Train-Bwy. Station"

Bus: Broadway #6 to Spring St.

Path—9th St./6th Ave. Station.

Commercial Equipment
Stocked: ICOM, MAXON,
Midland, Standard, Wil-
son, Yaesu. We serve
municipalities, busi-
nesses, Civil Defense,
etc. Portables, mobiles,
bases, repeaters...

We Stock: AEA, ARRL, Alpha, Ameco, Antenna Specialists, Astatic, Astron, B & K, B & W, Bencher, Bird, Butternut, CDE, CES, Collins, Communications Spec. Connectors, Covercraft, Cushcraft, Daiwa, Dentron, Digimax, Drake, ETO (Alpha), Eimac, Encomm, HeilSound, Henry, Hustler (Newtronics), Hy-Gain, Icom, KLM, Kantronics, Larsen, MCM (Daiwa), MFJ, J.W. Miller, Mini-Products, Mirage, Newtronics, Nye Viking, Palomar, RF Products, Radio Amateur Callbook, Rockwell Collins, Saxton, Shure, Telex, Tempo, Ten-Tec, Tokyo Hi Power, Trionyx TUBES, W2AU, Waber, Wilson, Yaesu Ham and Commercial Radios, Vocom, Vibroplex, Curtis, Tri-Ex, Wacom Duplexers, Repeaters, Phelps Dodge, Fanon Intercoms, Scanners, Crystals, Radio Publications.

WE NOW STOCK COMMERCIAL COMMUNICATIONS SYSTEMS

HAM DEALER INQUIRES INVITED PHONE IN YOUR ORDER & BE REIMBURSED

COMMERCIAL RADIOS stocked & serviced on premises.

Amateur Radio Courses Given On Our Premises, Call

Export Orders Shipped Immediately. TELEX 12-7670

ALL
SALES
FINAL

For the best buys in town call:
212-925-7000
Los Precios Mas Bajos en
Nueva York...



I COM

IC-R71A, 751A, 745, 28A/H, 38A, 48A, R-7000,
1271A, 271A/H, 3200A, 471A/H, 735, Micro2




SMART PATCH

CES Simplex Autopatch 510-SA Will Patch FM
Transceiver To Your Telephone Great For
Telephone Calls From Mobile To Base Simple
To Use.

PRIVATE PATCH III in stock

Budwick ANT. Products

FLUKE 77 Multimeter

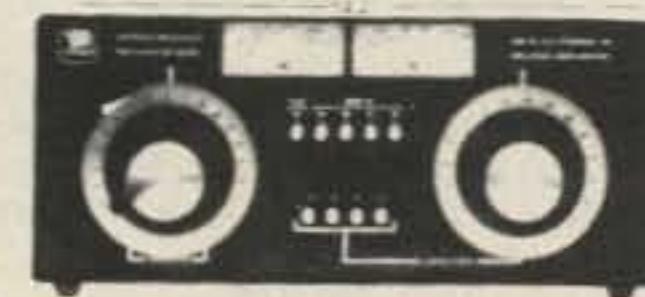

Nye MBV-A


3 Kilowatt Tuner



Ten-Tec Tuner 229A

MFJ Models
422, 313, 989B, & 941D

SANGEAN Portable Shortwave Radios

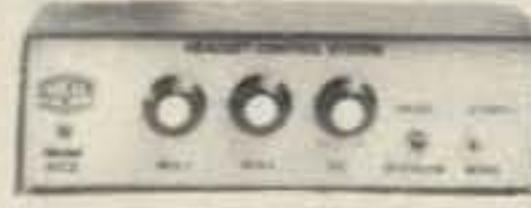

HEIL
EQUIPMENT
IN STOCK

B & W PRESENTS A WINNING COMBINATION



1500W.

MODEL PT2500A LINEAR AMPLIFIER

The Barker & Williamson PT2500A Linear Amplifier is a completely self-contained table-top unit designed for continuous SSB, CW, RTTY, AM or ATV operation. Intended for coverage of all amateur bands between 1.8 MHz and 21 MHz, it can be readily modified for frequencies outside the amateur bands for commercial or military application. Two type 3-500Z glass envelope triodes provide reliability and rapid turn-on time.

FEATURES INCLUDE:

- Full 1500 watt output
- Pi-network input for maximum drive
- Pressurized plenum cooling system
- DC antenna relay for hum-free operation
- Illuminated SWR and power meters
- Vernier tuning for accurate settings
- Pi-L output for greater harmonic attenuation

Ruggedly constructed of proven design, this amplifier reflects the manufacturer's critical attention to details—such as the silver-plated tank coil for maximum efficiency. Cathode zener fuse and internal/external cooling are among the protective and safety devices employed. Input and output impedances are 50 ohms.

Dimensions: 17" wide x 19" deep x 8½" high
Weight: 80 lbs. (shipped in 3 cartons to meet UPS requirements)

Price: \$2175.00 FOB factory. Price includes one year limited warranty.
Call or write factory for complete specifications.



1500W.

MODEL VS1500A ANTENNA COUPLER

The Barker & Williamson VS1500A antenna coupler is designed to match virtually any receiver, transmitter or transceiver in the 160 to 10 meter range (1.8 to 30 MHz) with up to 1500 watts RF power to almost any antenna, including dipoles, inverted vees, verticals, mobile whips, beams, random wires and others, fed by coax cable, balanced lines or a single wire. A 1:4 balun is built in for connection to balanced lines.

FEATURES INCLUDE:

- Series parallel capacitor connection for greater harmonic attenuation.
- In-circuit wattmeter for continuous monitoring.
- Vernier tuning for easy adjustment.

Front panel switching allows rapid selection of antennas, or to an external dummy load, or permits bypassing the tuner.

Dimension (Approx.): 11" wide x 13" deep x 6" high

Weight: 6½ lbs.

Price: \$499.00 FOB Factory. Fully warranted for one year.

friction. And sadly, even if all frictional forces could be eliminated, the spinning wheels could only give back the energy imparted to it when it was set in motion.

New Ideas and Oft Repeated Pitfalls

It is not enough to identify a source of energy and attempt to make it do useful work. Energy confers no benefit to us unless it is *available*. A warm mass of metal does indeed contain heat energy. But, such heat energy will not of its own accord flow to a hotter mass of metal. It is much like expecting a ball to roll uphill. If, however, the inventor arranges his apparatus so that there can be a flow of heat energy from a hot to a cold body, he is on the right track and may well come up with a new and useful machine or energy-conservation technique.

A stumbling block often overlooked by the enthusiastic would-be inventor is the nature of chemical reactions. All chemical reactions tend toward a stage of equilibrium wherein the reaction stops. When the equilibrium is attained quickly, you have the ingredients for an explosion; slower reactions enable such devices as batteries to be useful. A corollary of the equilibrium process is that the initial chemicals get "used up" or change their status in such a way as to be ultimately no longer available for providing energy. Thus, electric cells must be either replaced or recharged after a time.

Combustion, too, delivers just so much energy from the chemical fuels. Along with perpetual-motion machines, patents are often sought for alleged 400-mile-per-gallon carburetors. Of course, the bottom line to such inventions is that the major oil companies buy them up and keep them off the market! Although improved carburetors and fuel injectors constantly squeeze more efficiency from automobiles as the years go by, you can bet your boots that outlandish claims can be taken with a grain of salt.

Speaking of chemical reactions and automobiles, a continually "reinvented" panacea for the expense of fueling the automobile involves a hydrogen-operated engine in which the hydrogen is indirectly created by the engine itself. The basic idea is to have the engine drive a generator, which provides electric power to free hydrogen from water by electrolysis. So, you collect the hydrogen and burn it in the engine, which hopefully provides both motive power and the power to turn the generator.

Electrical and chemical systems are often manipulated by would-be inventors who would have the everyday horse sense not to pursue an analogous goal via a mechanical system. Thus, wheels with hinged weights to keep them forever in motion may loom up as obviously ridiculous. But in electrical and chemical systems, the link between cause and hoped-for effect is invisible or less obvious; a would-be inventor may become hoodwinked by the apparent sophistication of his violation of nature's laws. Not even the microprocessor or computer can be successfully deployed to fool nature. So, if the system in its most primitive form cannot lift itself by its boot-

straps, there is nothing to be gained from a program instructing it to do so.

Some Open-Minded Conclusions

If the would-be inventor's quest is not perpetual motion or free energy, but more bang for the buck, it is less easy to try to accuse him of chasing a pipe dream. For then, he can justifiably maintain that he is working in the realm of the possible and the practical. Consider such processes and techniques as geothermal sources of electric power, fuel-cell energy systems, and solar and wind electrical sources. These are all capable of providing "cheap lunches" in the quest for abundantly available energy. Moreover, they are not blue-sky projects; successful applications already exist and are giving good account of themselves.

In both technology and science, there are activities that resemble ordinary notions of perpetual motion or free energy, but upon closer scrutiny are found to either abide by natural laws of energy conservation or are more hypothesis than fact. For example, a resonant circuit cooled to near-zero temperature will oscillate indefinitely, or almost so.

But can energy be extracted from such a "tank"? It is indeed easy enough to tap such an energy source, but in so doing, the available energy will be depleted. This happens every time instrumentation is applied to ascertain that oscillation still exists. Therefore, such a cryogenic resonant circuit, far from being a free-lunch energy source, is nothing more than a sophisticated storage system—like a battery, charged capacitor, or tank of water, it does not automatically replenish what it gives up.

In science, there is the hypothesis that the near vacuum of intergalactic space is not as benign as once supposed. Rather, energy can apparently arise from such apparent "nothingness." The reasoning underlying such "far-out" theorizing is more mathematical and esoteric than practical. The harnessing of such a cosmological source of energy probably had best be left to the Buck Rogers and Superman scenarios of space-age science, unless you are prepared to demonstrate your working model to the skeptics in the patent office.

Science, itself, is in a dilemma regarding the absolute integrity of the conservation of energy in the universe at large. Right now, effort is being expended trying to learn whether the proton of atoms has an infinite life span, or whether it, too, ultimately decays. In the meantime, there is little communication to the non-scientist bold enough to ask such questions as why the elementary particles of physics, such as the electron, spin without letup. Instead of holding their breath until really satisfying explanations of such enigmas are forthcoming, inspired inventors will continue their quest for unconventional energy sources. And, the smart ones will diplomatically refrain from presenting "free-energy" systems or "perpetual-motion" machines to the patent office—less friction will be provoked through the use of other words and phrases. ■

ALL OUR PRODUCTS MADE IN USA

BARKER & WILLIAMSON

Quality Communication Products Since 1932
At Your Distributors Write or Call
10 Coral Street, Bristol, PA 19007
(215) 788-5581

✓ 53

THE MOST AFFORDABLE REPEATER

ALSO HAS THE MOST IMPRESSIVE PERFORMANCE FEATURES
(AND GIVES THEM TO YOU AS STANDARD EQUIPMENT!)

BAND	KIT	WIRED
6M, 2M, 220	\$630	\$880
440	\$730	\$980

(Also available for commercial bands)




FEATURES:

- SENSITIVITY SECOND TO NONE; 0.15 uV (VHF), 0.2 uV (UHF) TYP.
- SELECTIVITY THAT CAN'T BE BEAT! BOTH 8 POLE XTAL FILTER & CERAMIC FILTER FOR > 100 dB AT ± 12 KHZ. HELICAL RESONATOR FRONT ENDS TO FIGHT DESENSE & INTERMOD.
- OTHER GREAT RECEIVER FEATURES: FLUTTER-PROOF SQUELCH, AFC TO COMPENSATE FOR OFF-FREQ TRANSMITTERS, SEPARATE LOCAL SPEAKER AMPLIFIER & CONTROL.
- CLEAN, EASY TUNE TRANSMITTER; UP TO 20 WATTS OUT (UP TO 50W WITH OPTIONAL PA).

RECEIVING CONVERTERS

Models to cover every practical rf & if range to listen to SSB, FM, ATV, etc. NF = 2dB or less.

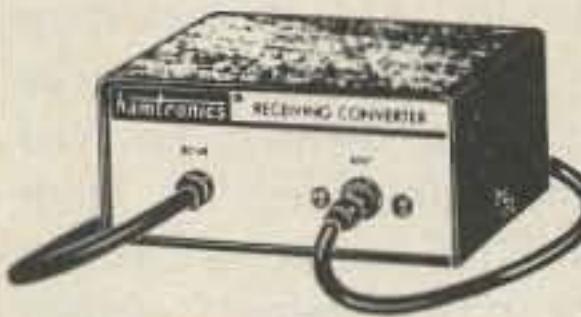

VHF MODELS

	Antenna Input Range	Receiver Output
Kit with Case	28-32	144-148
Less Case	50-52	28-30
Wired	50-54	144-148
	144-146	28-30
	145-147	28-30
	144-144.4	27-27.4
	146-148	28-30
	220-222	28-30
	220-224	144-148
	222-226	144-148
	220-224	50-54
	222-224	28-30

UHF MODELS

	Antenna Input Range	Receiver Output
Kit with Case	432-434	28-30
Less Case	435-437	28-30
Wired	432-436	144-148
	432-436	50-54
	439.25	61.25
	902-928	422-448

SCANNER CONVERTERS Copy 806 MHz band on any scanner. Wired/tested ONLY \$88.

TRANSMIT CONVERTERS

For SSB, CW, ATV, FM, etc. Why pay big bucks for a multi-mode rig for each band? Can be linked with receive converters for transceive. 2 Watts output vhf, 1 Watt uhf.

For VHF, Model XV2 Kit \$79 Wired \$149 (Specify band)	Exciter Input Range	Antenna Output
	28-30	144-146
	28-29	145-146
	28-30	50-52
	27-27.4	144-144.4
	28-30	220-222*
	50-54	220-224
	144-146	50-52
	144-146	28-30

For UHF, Model XV4 Kit \$79 Wired \$139	Exciter Input Range	Antenna Output
	28-30	432-434
	28-30	435-437
	61.25	439.25
	144-148	432-436*


*Add \$20 for 2M input

VHF & UHF LINEAR AMPLIFIERS. Use with above. Power levels from 10 to 45 Watts. Several models, kits from \$78.


- Send \$1 for Complete Catalog
(Send \$2.00 or 4 IRC's for overseas mailing)
- Order by phone or mail • Add \$3 S & H per order
(Electronic answering service evenings & weekends)
- Use VISA, MASTERCARD, Check, or UPS COD.

HIGH QUALITY XMTR & RCVR MODULES FOR REPEATERS, LINKS, TELEMETRY, ETC.

- R144/R220 FM RCVRS for 2M or 220 MHz. 0.15uV sens.; 8 pole xtal filter & ceramic filter in i-f, helical resonator front end for exceptional selectivity, > 100dB at ± 12 kHz, best available today. Flutter-proof squelch. AFC tracks drifting xmtrs. Xtal oven avail. Kit only \$138.
- R451 FM RCVR Same but for uhf. Tuned line front end, 0.3 uV sens. Kit only \$138.
- R76 FM RCVR for 10M, 6M, 2M, or 220. As above, but w/o AFC or hel. res. Kits only \$118. Also avail w/4 pole filter, only \$98/kit.
- R110 VHF AM RECEIVER kit for VHF aircraft or ham bands or Space Shuttle. Only \$98.

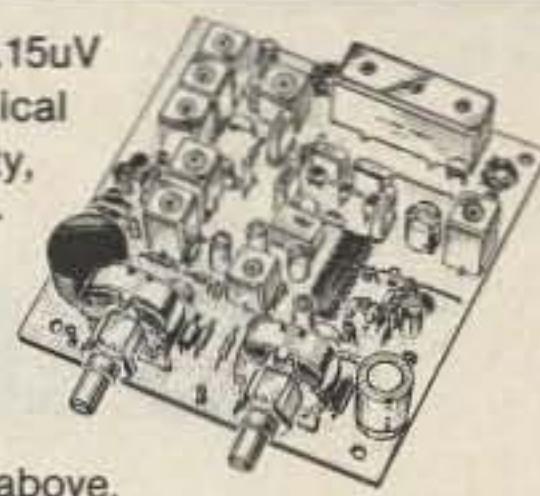


- TA51 VHF FM EXCITER for 10M, 6M, 2M, or 220 MHz. 2 Watts continuous, up to 3W intermittent. Kit only \$68
- TA451 UHF FM EXCITER 2W cont., up to 3W intermittent. Kits only \$68. Xtal oven avail.
- VHF & UHF LINEAR AMPLIFIERS. For either FM or SSB. Power levels from 10 to 45 Watts to go with exciters & xmtg converters. Several models. Kits from \$78.

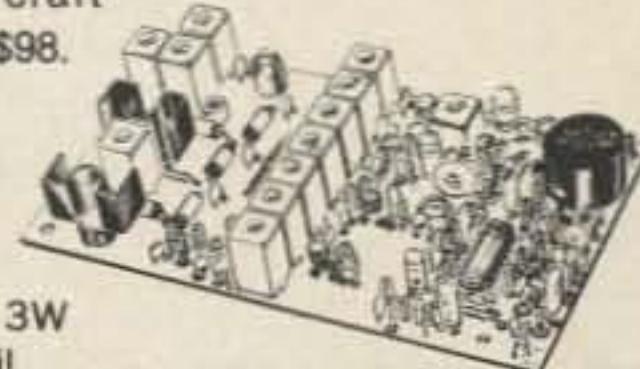

NOW—FCC TYPE ACCEPTED TRANSMITTERS, RECEIVERS, AND REPEATERS AVAILABLE FOR HIGH-BAND AND UHF. CALL FOR DETAILS.

LOW-NOISE PREAMPS

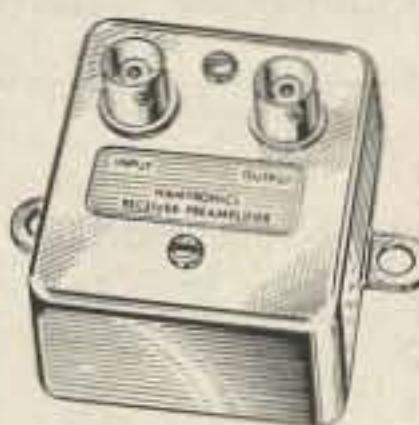

Hamtronics Breaks the Price Barrier!

*

No Need to Pay \$80 to \$125 for a GaAs FET Preamp.

FEATURES:

- Very Low Noise: 0.7dB VHF, 0.8dB UHF
- High Gain: 13 to 20dB, Depending on Freq.
- Wide Dynamic Range for Overload Resistance
- Latest Dual-gate GaAsFET, Very Stable

MODEL	TUNES RANGE	PRICE
LNG-28	26-30 MHz	\$49
LNG-50	46-56 MHz	\$49
LNG-144	137-150 MHz	\$49
LNG-160	150-172 MHz	\$49
LNG-220	210-230 MHz	\$49
LNG-432	400-470 MHz	\$49
LNG-800	800-960 MHz	\$49

HELICAL RESONATOR PREAMPS




Low-noise preamps with helical resonators reduce intermod and cross-band interference in critical applications. 12 dB gain.

MODEL	TUNING RANGE	PRICE
HRA-144	143-150 MHz	\$49
HRA-(*)	150-174 MHz	\$49
HRA-220	213-233 MHz	\$49
HRA-432	420-450 MHz	\$64
HRA-(*)	450-470 MHz	\$64

*Specify Center frequency desired

MINIATURE PREAMPS

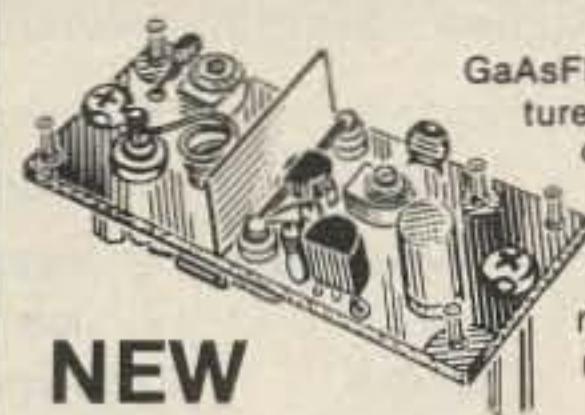

GaAsFET Preamps with features similar to LNG, except designed for LOW COST and SMALL SIZE: only 5/8" W × 1-5/8" L × 3/4" H. Easily mounts inside many radios.

NEW

Model LNW-(*) Only \$19/kit, \$34/wired

Models available to tune the following bands: 25-35, 35-55, 55-90, 90-120, 120-150, 150-200, 200-270, and 400-500 MHz.

*Specify band

IN-LINE PREAMPS

NEW



GaAsFET Preamp with features like LNG. Automatically switches out of line during transmit. Use with base or mobile transceivers up to 25W. Tower mtg hw incl.

MODEL	TUNES RANGE	KIT	WIRED
LNS-144	120-175 MHz	\$59	\$79
LNS-220	200-240 MHz	\$59	\$79
LNS-432	400-500 MHz	\$59	\$79

ACCESSORIES

- MO-202 FSK DATA MODULATOR. Run up to 1200 baud digital or packet radio signals through any FM transmitter.
- DE-202 FSK DATA DEMODULATOR
- COR-2 KIT With audio mixer, local speaker amplifier, tail & time-out timers.
- COR-3 KIT with "courtesy" beep".
- DTMF DECODER/CONTROLLER KITS
- AUTOPATCH KITS. Provide repeater autopatch, reverse patch, phone line remote control of repeater, secondary control.
- CWID KITS
- SIMPLEX AUTOPATCH

hamtronics, inc.
65-D MOUL ROAD • HILTON NY 14468
Phone: 716-392-9430

Hamtronics® is a registered trademark

Subaudible Snooping

*Track down subaudible access tones
with KE6VK's low-frequency counter.*

Number 7 on your Feedback card

The VHF and UHF amateur bands are filling up with repeaters, and many repeater owners are finding it necessary to require the use of subaudible tone encoders to access their repeaters. The design presented here is a counter which, when connected to a receiver, will display the frequency of the subaudible tone used by the transmitting station. Several special

circuits have been designed into the counter to provide proper filtering of the desired tone and to allow a frequency resolution of 0.1 Hz in a counting interval of only 0.2 seconds.

The typical frequency range of subaudible tones is 67.0 Hz to 250.0 Hz, with an FM deviation of 0.5 kHz or less. This low value of deviation means that unwanted signals

with higher deviations, such as speech, must be rejected. Also, the point at which the receiver audio is obtained must be prior to the low-frequency filters in the audio amplifiers to avoid unwanted rolloff.

Circuit Design

A block diagram of the counter is shown in Fig. 1. The input frequency is passed through a low-pass filter, a tunable bandpass filter, and then into a phase-locked loop consisting of a phase detector, voltage-controlled oscillator (vco), and frequency divider. The vco generates a frequency 100 times the input frequency, and this signal is used to tune the bandpass filter. The 100f frequency is then divided by two and used as the input to the counter. The counter time base allows the counter to count for 0.2 seconds, latches the result into the display, and resets the counter for the next counting interval. Counting a 50f frequency for 0.2 seconds results in a displayed frequency of 10f and, by moving the decimal point one digit to the left, we can display the frequency f with a resolution of 0.1 Hz.

Fig. 2 is the detailed circuit diagram. The audio enters at the input to U17A, which presents a high input impedance to the receiver and a low output impedance to drive the low-pass filter. U17B and U17C form a low-pass filter with a cutoff frequency of 300 Hz to provide rejection to speech. The bandpass filter, U18, is placed between the two low-pass sections and tunes itself to 1/100th of the frequency of the vco, automatically centering the filter at the desired frequency. The final amplifier section, U17D, is connected as a comparator.

U16 contains both the vco and the phase detector, and the frequency dividers are in U15. Up to this point in the circuit, the ICs all run from a regulated 8 volts from U6. Since the rest of the circuit operates at 5 volts, a level shifter using 1k and 1.8k resistors is necessary for proper interface. The time-base generator, U13, uses a 3.2768-MHz crystal and divides it down to 200 Hz. Another divider, U14, divides the 200 Hz down by 40, resulting in a timing period of 0.2 seconds. The function of U11A and U12 is to cause the display to update after 0.2 seconds, reset the counters (U7-U10), and reset the time-base divider chain (U13, U14).

Parts List

Value	Description	Vendor	P/N	Qty.	Price
0.01 uF	Mylar	Jameco	MY.01/100	2	\$.54
0.001	Mylar	Jameco	MY.001/100	2	.24
4-34 pF	Ceramic	Jameco	TC 4-34	1	.75
1 uF	Film	Jameco	P4537	4	2.64
22 uF, 16 V	Elect.	Digi-Key	P6024	1	.14
100 uF, 16 V	Elect.	Jameco	R100/16	2	.42
U1-U4	TIL311	Jameco		4	43.80
U7-U10	74C160	Jameco		4	4.76
U11	74LS74	Jameco		1	.39
U17	TL084	KCS		1	1.40
U13	CD4060	Jameco		1	.89
U14, U15	CD4518	Jameco		2	1.98
U12	CD4011	Jameco		1	.29
U16	CD4046	Jameco		1	.89
U18	MF10CN	Digi-Key		1	3.75
U6	7808	Jameco		1	.79
U5	7805	Jameco		1	.79
3.2768 MHz	Crystal	Digi-Key		1	1.62
4.7 Meg, 1/4 Watt		Jameco		1	.06
1.0k, 1/4 Watt		Jameco		4	.24
1.8k, 1/4 Watt		Jameco		3	.18
68k, 1/4 Watt		Jameco		1	.06
270k, 1/4 Watt		Jameco		1	.06
390k, 1/4 Watt		Jameco		1	.06
100k, 1/4 Watt		Jameco		4	.24
1.5k, 1/4 Watt		Jameco		2	.12
12k, 1/4 Watt		Jameco		2	.12
1.2k, 1/4 Watt		Jameco		3	.18
2.2 Meg, 1/4 Watt		Jameco		1	.06
47k, 1/4 Watt		Jameco		1	.06
180k, 1/4 Watt		Jameco		2	.12
1.8k, 1/4 Watt		Jameco		1	.06
82k, 1/4 Watt		Jameco		1	.06
6.8k, 1/4 Watt		Jameco		1	.06
100 Ohm, 1/4 Watt		Jameco		1	.06
390 Ohm, 1/4 Watt		Jameco		1	.06
					\$67.94

Sources of supply: KCS Electronics, 1043 North Stadem Drive, Tempe AZ 85281; Digi-Key Corp., PO Box 677, Thief River Falls MN 56701; and Jameco Electronics, 1355 Shoreway Road, Belmont CA 94002.

The main counter chain is U7-U10, and it connects directly to the display ICs, U1-U4. The displays also contain integral latches and decoders as well as provisions for blanking and lighting decimal points. The left-hand decimal point on U4 is wired to be continuously on. The rest of the decimal points are wired to the output of U11B, which acts like a lock detector. When the phase-locked loop is out of lock, U11B will cause the decimal points to turn on or flash.

Operation

The Q of the bandpass filter (47) and the phase-locked-loop filter time constants were determined experimentally by trying to minimize lockup time and maximize rejection of voice modulation. The bandpass filter Q should be high to provide filtering, but low enough to allow some signal to the phase-locked loop when it is not locked. The present design locks up in about one second if the level of the subaudible tone is 0.5-kHz deviation. Do not be surprised if the display reads 120.0 Hz on stations with poorly filtered power supplies.

Interfacing and Adjustment

The time base may be mea-

sured in one of several ways. If a counter is available that will measure period, it can be connected to U14, pin 13 and the variable capacitor adjusted for .200000 seconds. Pin 12 of U11B should be grounded during this measurement. Another alignment method is to measure the frequency of the crystal at U12A, pin 10 and to adjust the frequency to 3.276800 MHz.

The power requirements are 12-14 volts at

about 360 mA. Both voltage regulators should be mounted to a heat sink of four to six square inches to provide adequate cooling.

The audio connection to the receiver should be at the discriminator output or possibly just before the volume-control pot. Inspect the circuit carefully for circuits that would roll off the low-frequency response and connect the audio pickup ahead of these filters. Next, connect an oscilloscope to pin 2 of U18 and note if any limiting takes place when normal speech is received. The proper audio level is that which causes just occasional limiting on audio peaks. If the gain needs to be adjusted, change the value of the 100k resistor connected between pins 6 and 7 of U17A. More gain requires a higher value; a lower value will reduce the gain.

Conclusion

This subaudible tone counter will allow you to make on-the-air measurements of the tone frequency of a transmitting station. If the signal you are receiving is the output of a repeater, bear in mind that most repeaters will roll off the low frequencies and not retransmit them. The best results will be obtained if the station can be received directly. ■

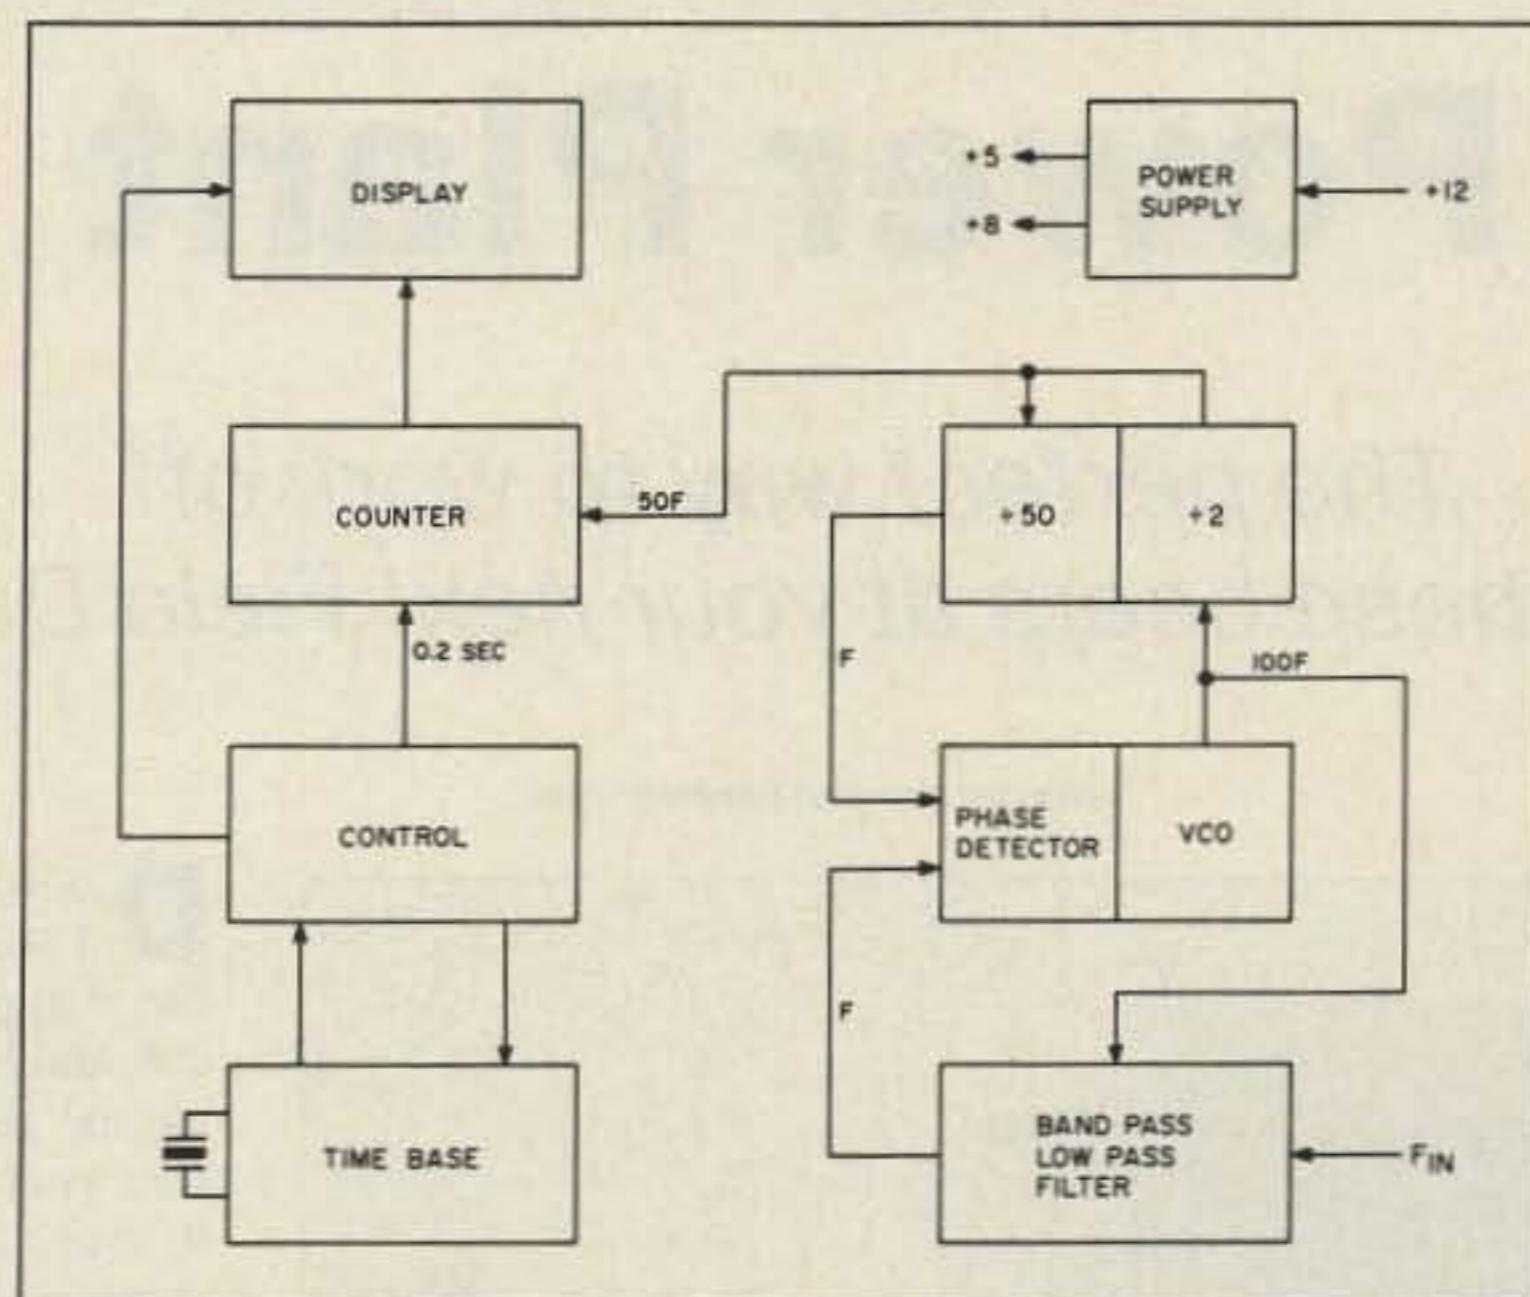


Fig. 1. Block diagram.

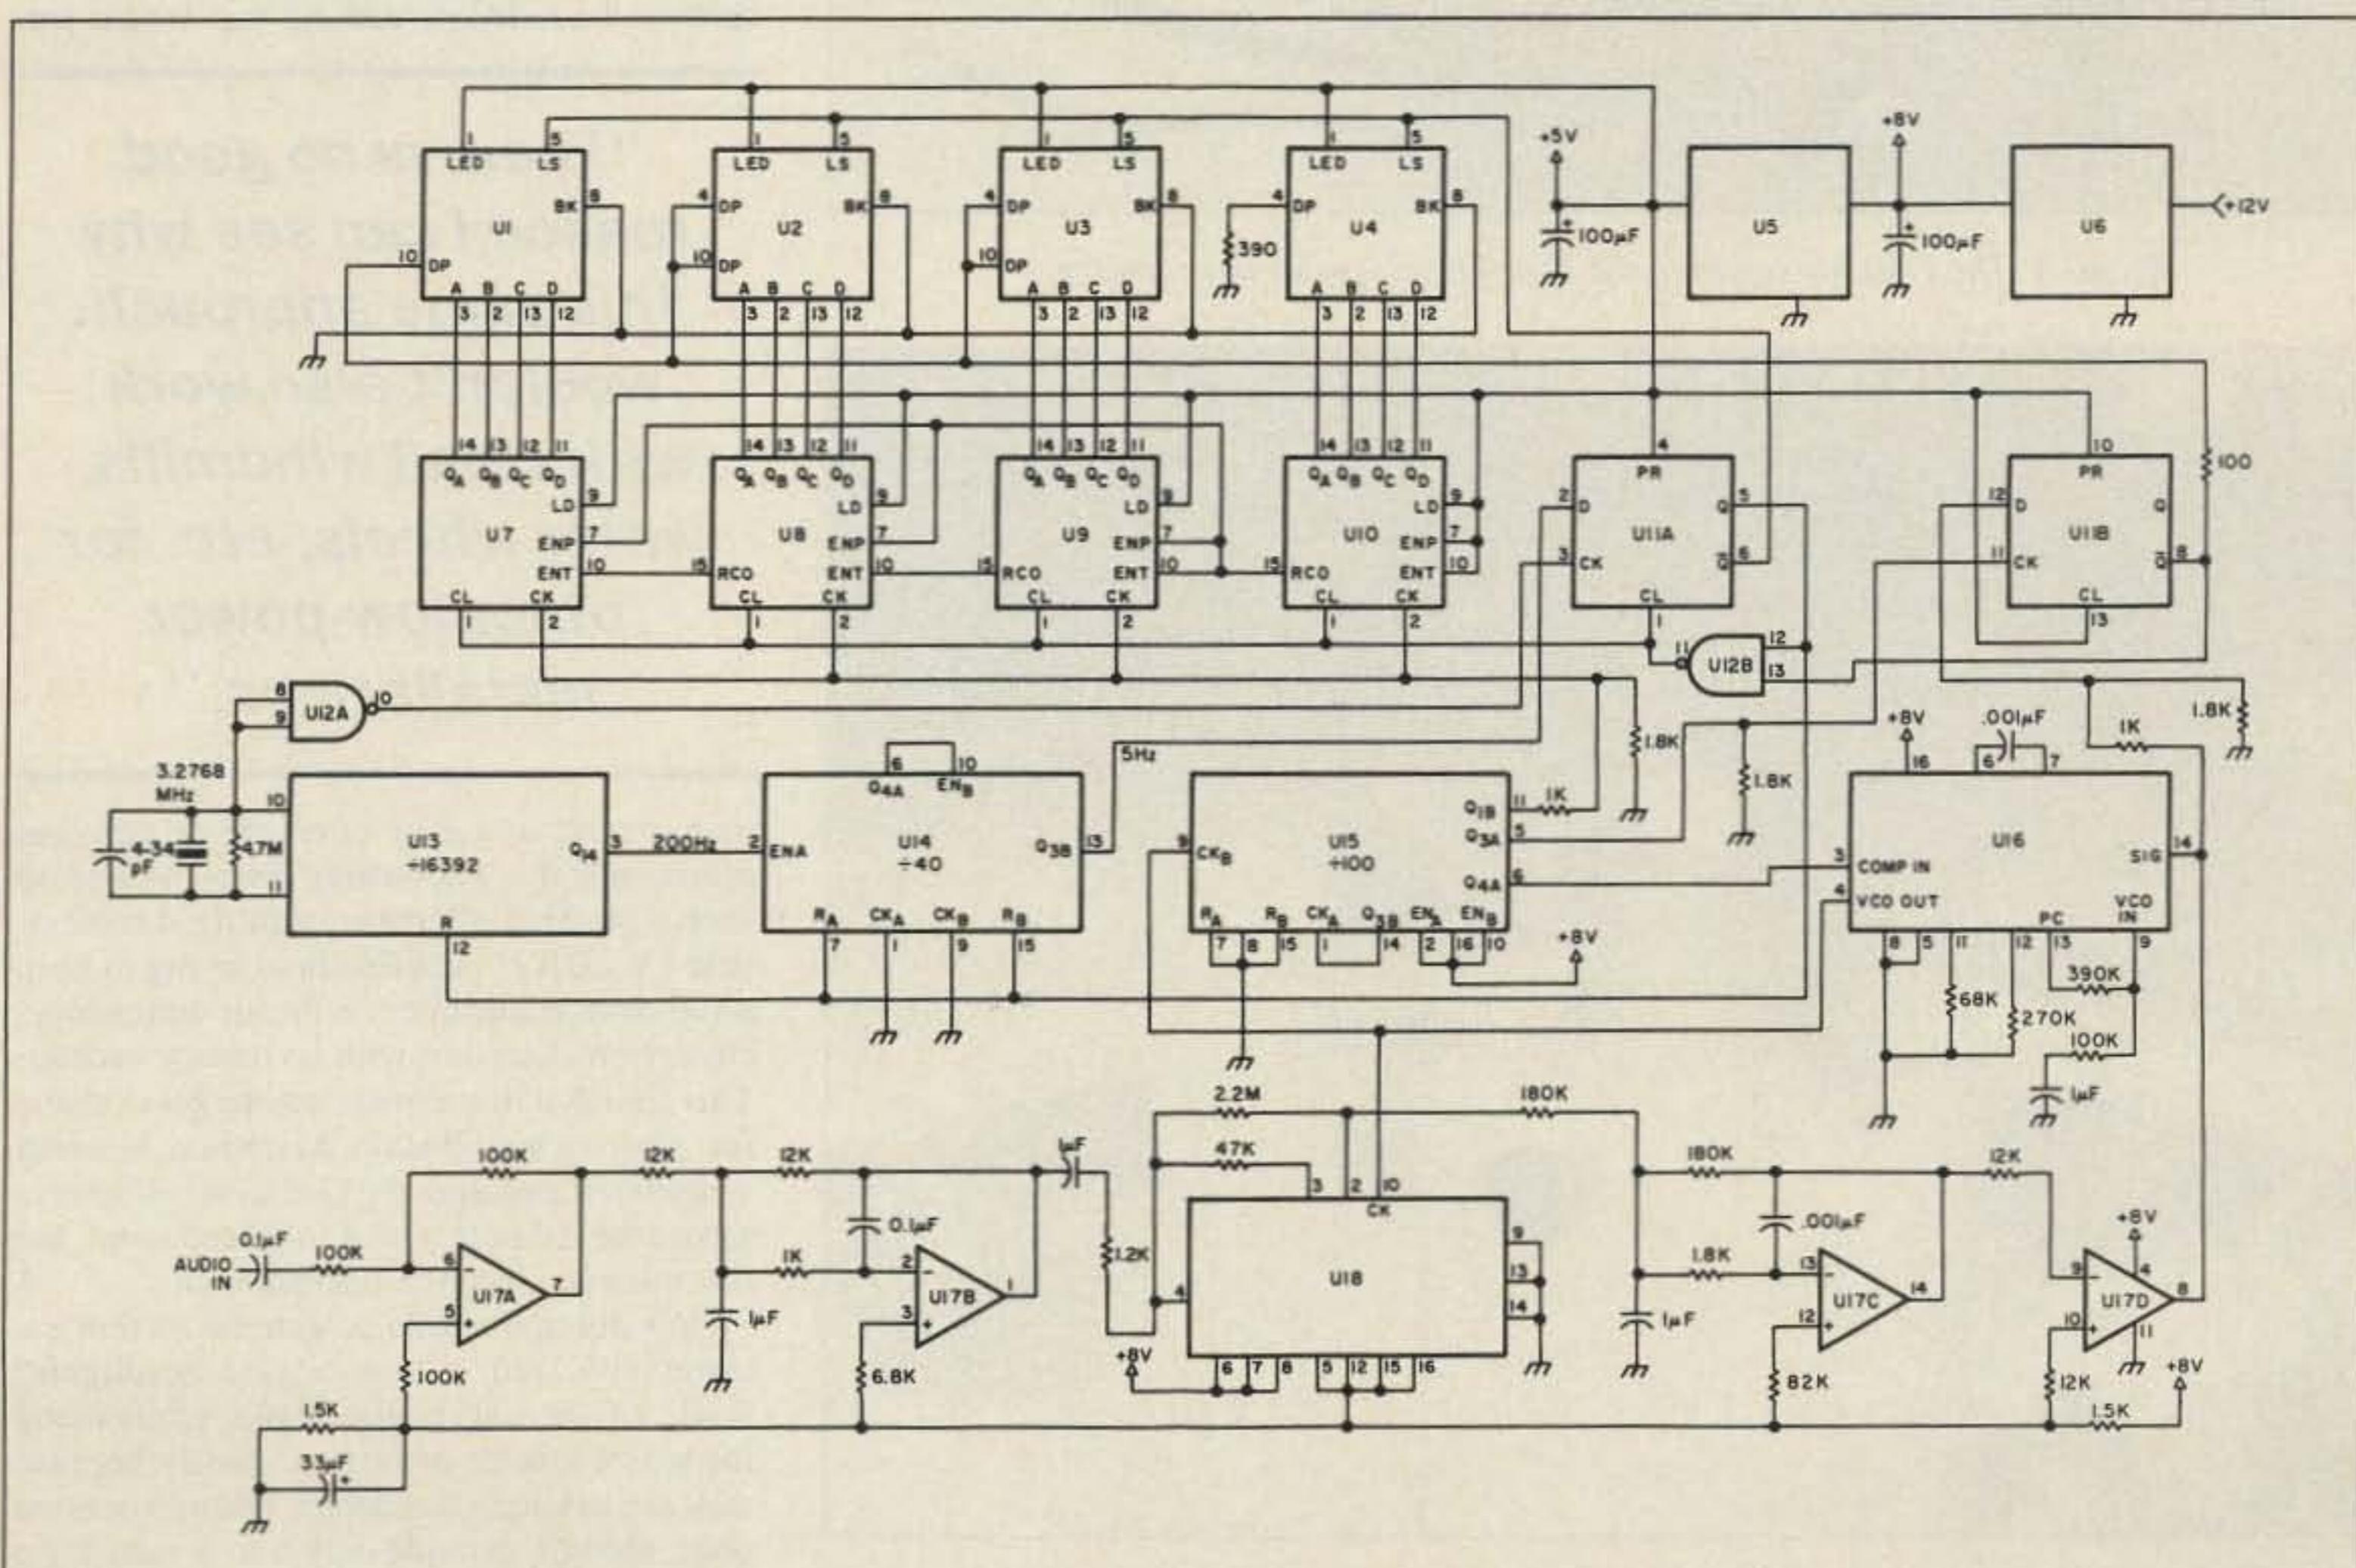


Fig. 2. Circuit diagram.

A Pedal-Pushing Power Plant

*The perfect way to work off
all those beers at your next Field Day.*

Number 8 on your Feedback card

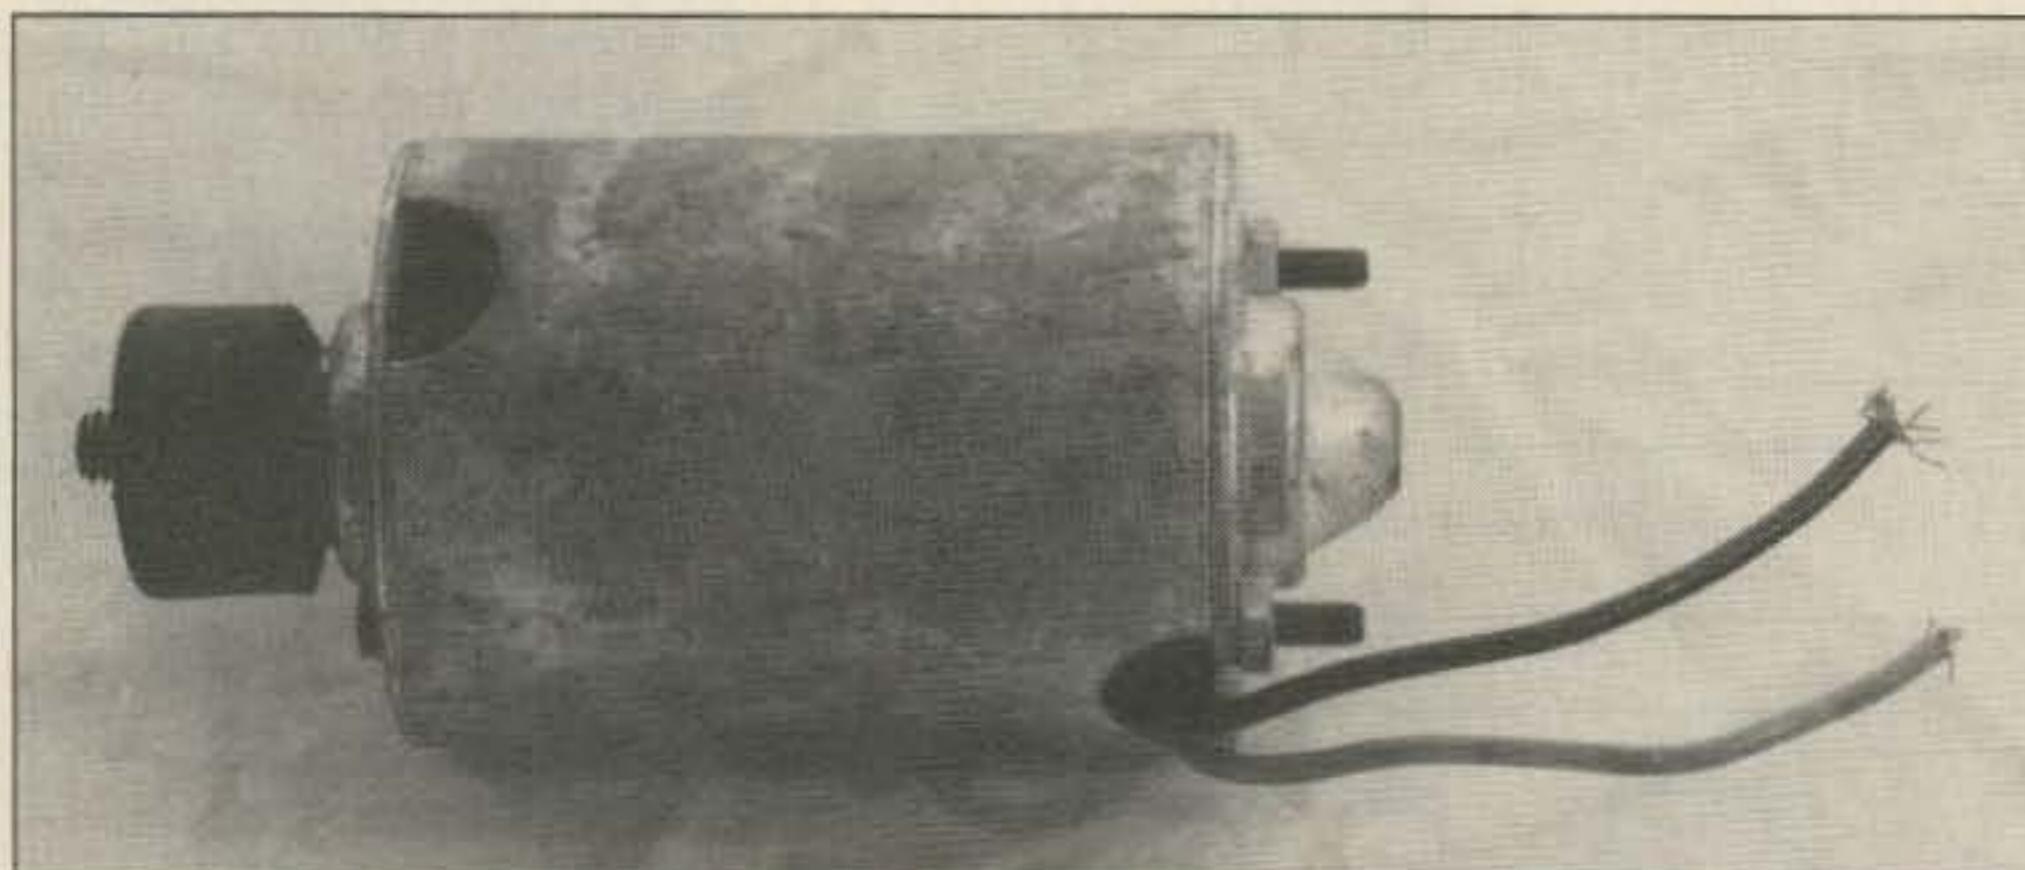


Photo A. The 1/10-horsepower, 12-V-dc bicycle pedal-assist motor.

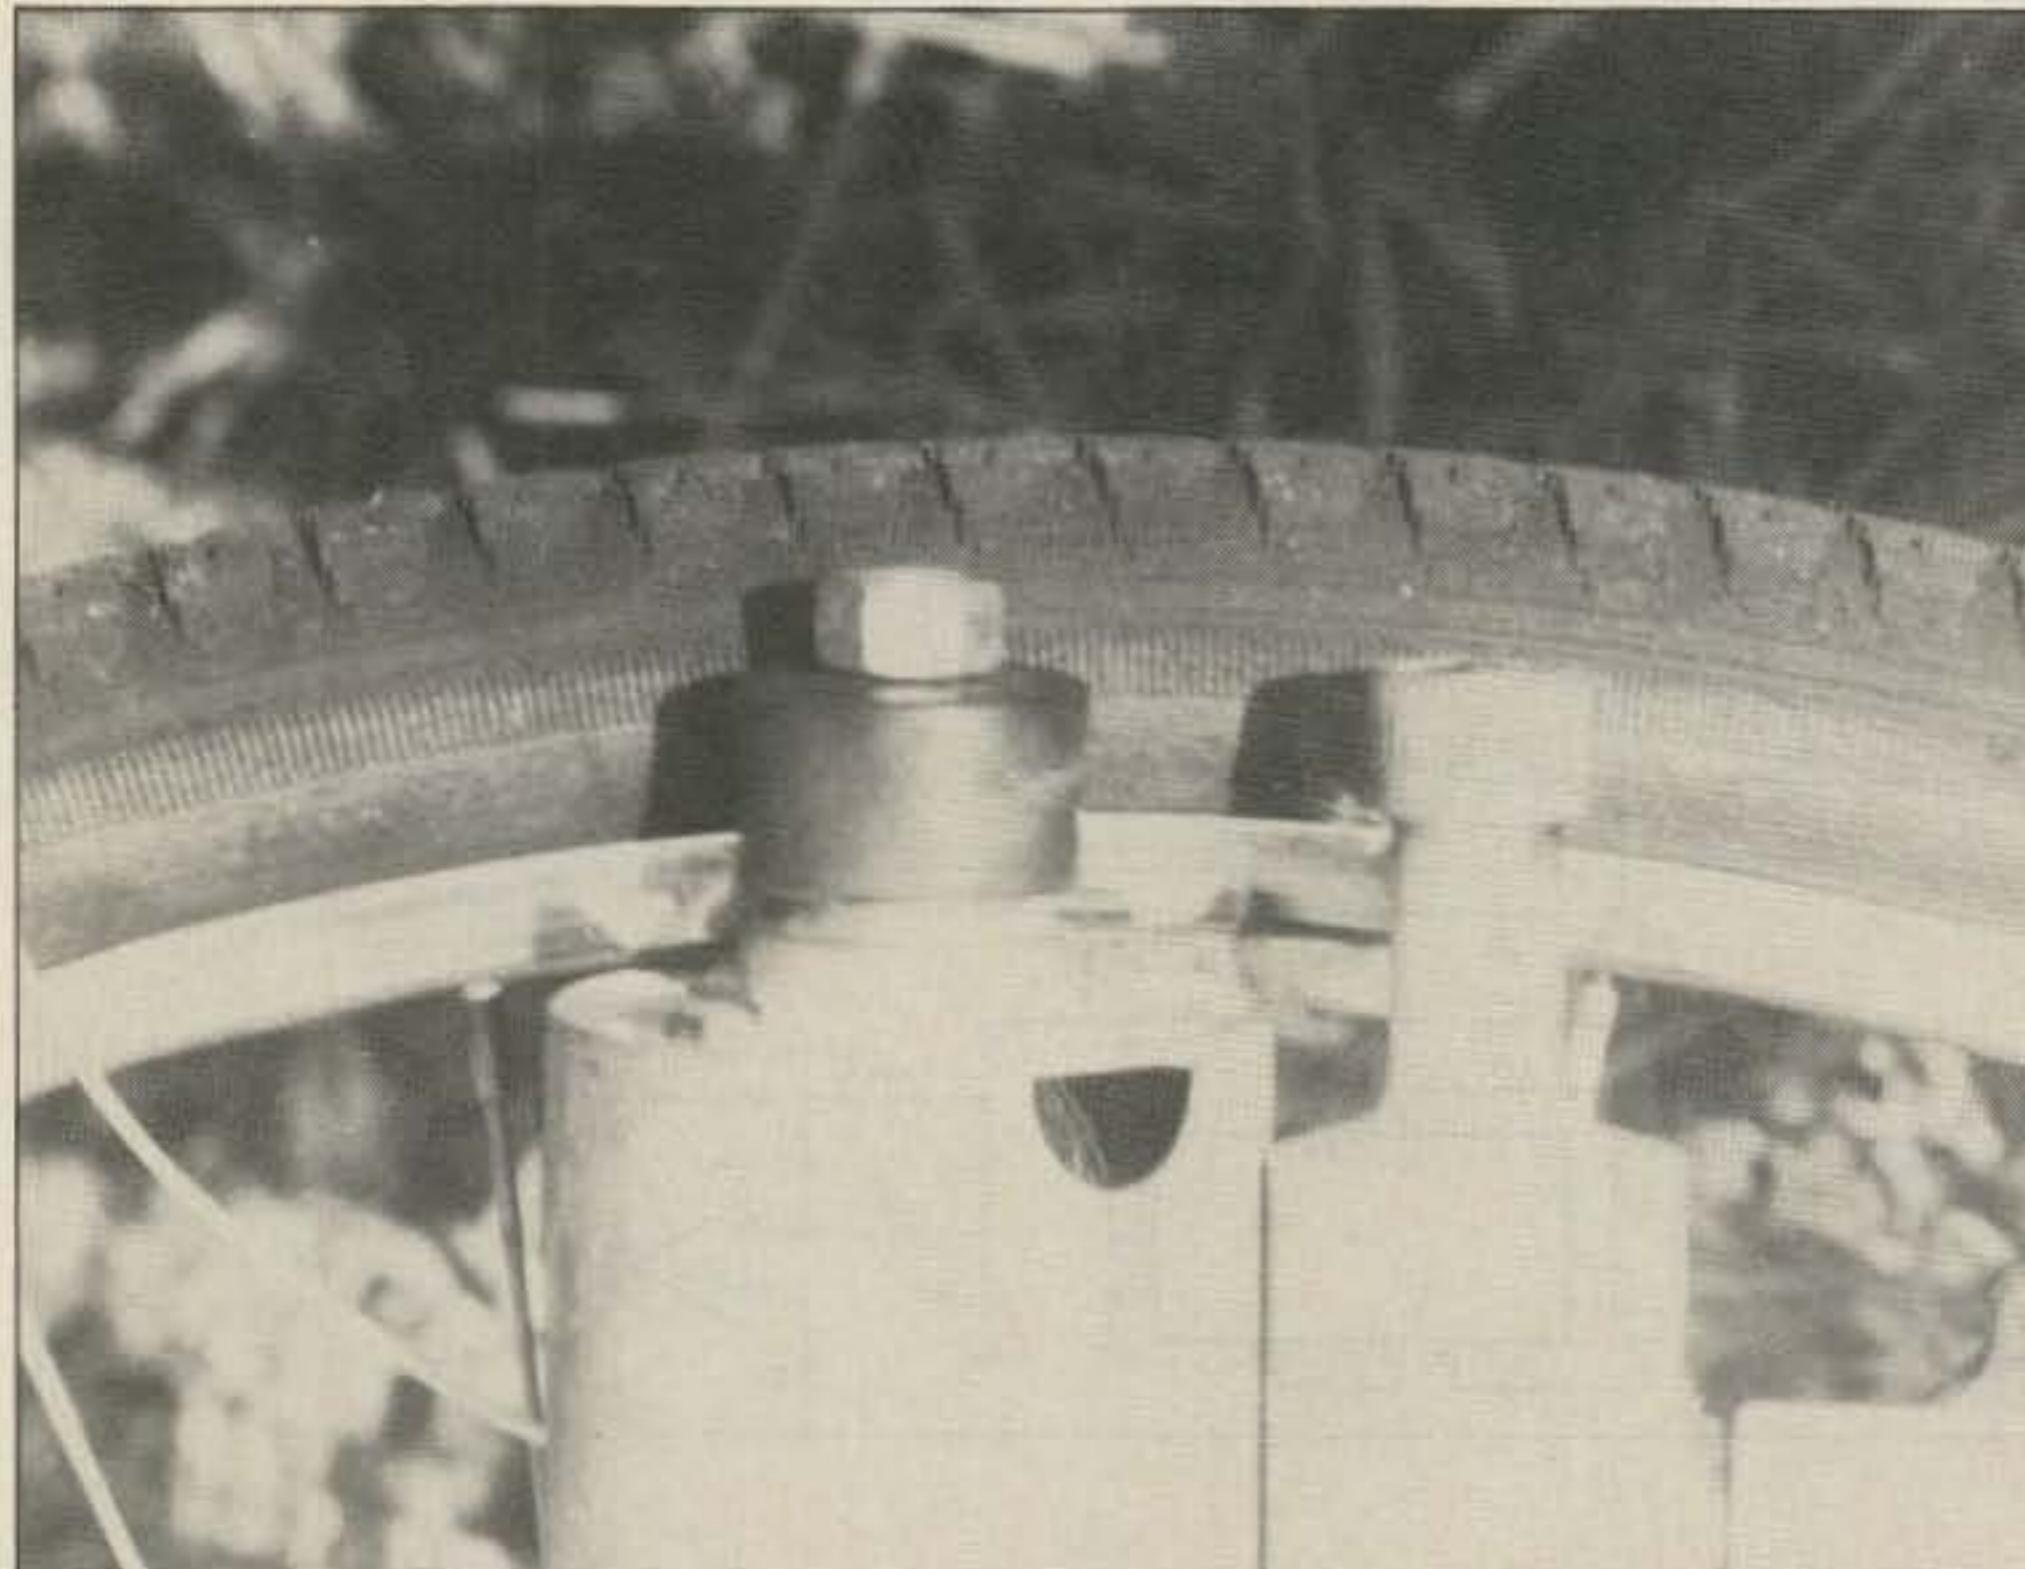


Photo B. The motor with the home-brew friction roller mounted against the bicycle tire rim. The smaller roller is the regular bicycle headlight generator.

Do you need an inexpensive source of 12-volt auxiliary power for emergency use, camping out, Field Day, and the like? I did, and I wanted to use my bicycle to generate the power. Regular automotive alternators were too heavy, cumbersome, and hard to crank using a bike. What I needed was something that would provide a steady 10 or 15 Watts for operating QRP or that could charge up a small lawn-tractor or motorcycle battery. I needed something that would run

"There is no good reason I can see why this same approach wouldn't also work with small windmills, water wheels, etc. for other low-power installations."

with a relatively easy cranking or pedaling effort, not the gut-busting level needed to keep a 50-Amp alternator turning. I remembered W2DNZ's stories about trying to keep a 100-Watt transmitter on the air with a bicycle-driven alternator with no battery backup. This sounded like a great way to get in shape for running the Boston Marathon wearing weights, or pedaling the *Gossamer Albatross* across the Atlantic with a stiff head wind, but not much fun for the weekend ham!

How about the little ac generators that are commonly sold to run bicycle headlights? Some of the survivalist books recommend them as a source of power, mostly because they are so widely available. The inexpensive ones, though, provide only 6 to 8 volts for a few Watts—better than nothing at all but not very useful. Using a voltage doubler or even

tripper right off the ac generator might deliver enough voltage to charge up a stack of NiCd pen-light cells to power an HT or small QRP rig, but at only a few mils of current it would take an awful lot of pedaling.

What I needed was a compromise, something with more power than a bicycle generator, but not as big as a heavy-duty auto or truck alternator. Two possibilities suggested themselves: either a small alternator from a lawn tractor, snowmobile, or outboard motor, or a permanent-magnet dc motor running backwards as a generator. The small alternators seemed almost ideal, but availability and price were a problem. Also, they tended to have unusual gear or belt-driven hardware, and they required a battery backup for the field current. I looked at automotive windshield washer motors, but they were cumbersome because of their right-angle worm-gear drives.

The Motor

After much searching, I settled on a 1/10-horsepower, 12-V-dc, permanent-magnet motor manufactured by Bosch. It is a pedal-assist motor for bicycles and electric mopeds, though it also has wide applications in things like wheelchairs and hobby robots. This particular one was purchased for five dollars at a hamfest flea market, but the same or similar motors regularly are listed in the surplus catalogs of companies like Etc, Meshna, Fair Radio, Herbach & Rademan, and several others, usually for prices in the ten-dollar-and-under category.

The motor is built in a cylindrical case about four inches long and two and a half inches in diameter. Power is provided through a 5/16" threaded shaft 3/4" long at one end. The positive and negative leads are both isolated from the case and are brought out through an opening on the side. The rota-

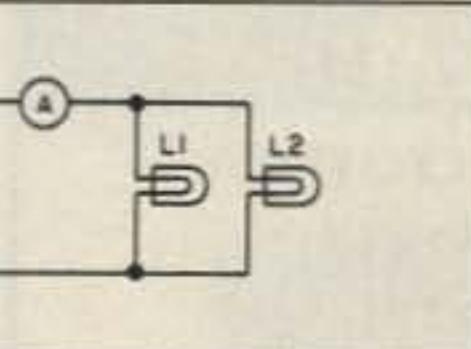


Fig. 1. Circuit used in the first test run.

tion of the armature is reversible with the polarity of the applied dc.

A friction roller was made from a 1-1/4" diameter cylinder of hard rubber about 3/4" thick. This happened to be available as a rubber foot on a piece of surplus medical electronic equipment, but any small rubber roller would do. Another good possibility would be a small grinding wheel of the sort sold for electric drills, though this might tend to wear the bicycle tire out after a while. If this generator setup is to be used with a stationary bicycle (as opposed to one that can be ridden) then the rear wheel tire and tube should be removed, a small diameter pulley mounted on the motor shaft, and the armature belt-driven off the wheel rim. Another possibility would be a small-diameter chain sprocket driving a 2:1 or 3:1 surplus step-up reduction gear.

With the friction drive arrangement I used, the gears on the bike were set at their highest speed; the rear wheel was turning approximately four revolutions for every turn of the pedals. Adding in the diameter ratio between the 26" rear tire and the 1-1/4" friction wheel, the total turn ratio was on the order of 80:1. This meant that when the pedals were turned at a steady 40 or 50 rpm, the armature was spinning in the vicinity of 3,500 to 4,000 rpm, which is about the same speed that the armature runs when it is lightly loaded as a 12-V-dc motor.

The setup for the first test run is shown in Fig. 1. Automotive taillight bulbs were used as a load, with the filaments hooked up in paral-

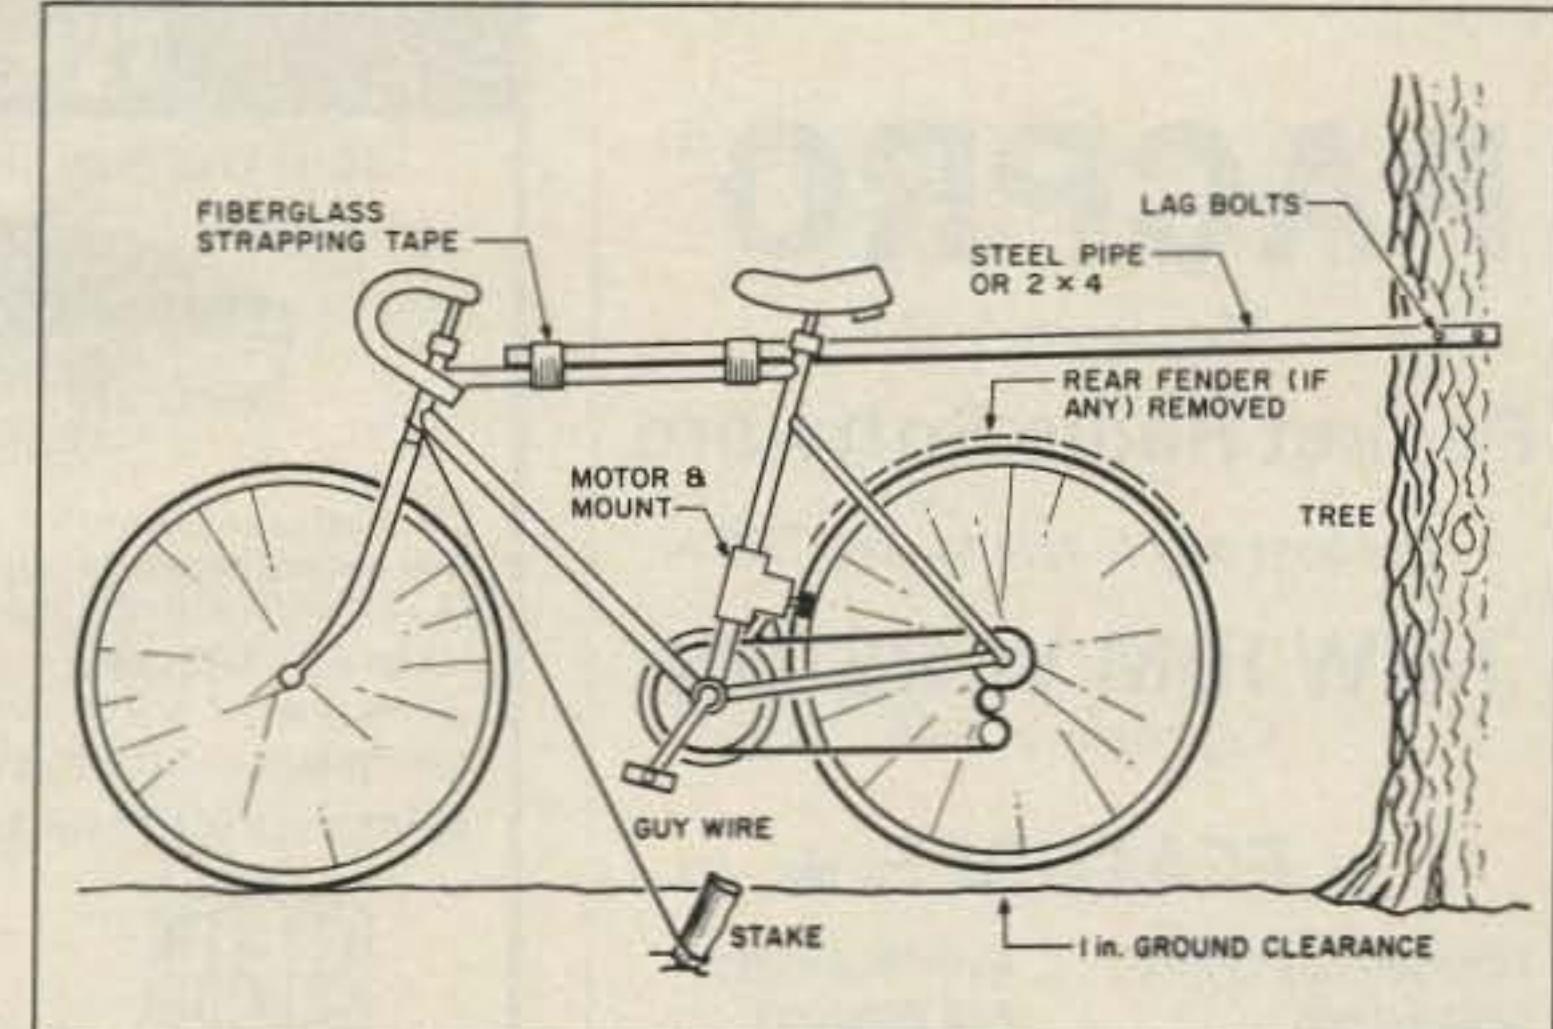


Fig. 2. The test stand. You may want to find a jockey to do the pedaling.

lel. An ammeter was placed in series with the load, and a voltmeter across it. The mechanical resistance of the generator was strong enough so that output varied considerably from one part of the pedal stroke to another. This is no problem with the bicycle actually in motion, as the inertia of the bike and rider is adequate to smooth things out. On a test stand, though, it is hard to get a steady enough output to read the meters (see Fig. 2).

The circuit in Fig. 3 was then tried. A couple of 2,200-uF capacitors were put in parallel with the armature and the load. The capacitance acted as an electrical flywheel and also raised the average output voltage somewhat. By really cranking hard on the pedals, a peak output of about 3.5 to 3.8 Amps at just a tad under 12 volts was the best that could be sustained. For most low-power ham operations, 30 or 40 Watts at 12 volts is adequate, and if the average load can be scaled back to hold the generator output around 3 Amps, at the 30-35-Watt level, a comfortable rate of pedaling can be sustained—about the same effort as riding on level pavement.

However, 11.9 to 12.1 volts is just a little too low for charging up a 12-volt standby battery. A nominal 12-volt lead-acid battery needs around 13 volts or better for recharge, even more if a blocking diode is used. At-

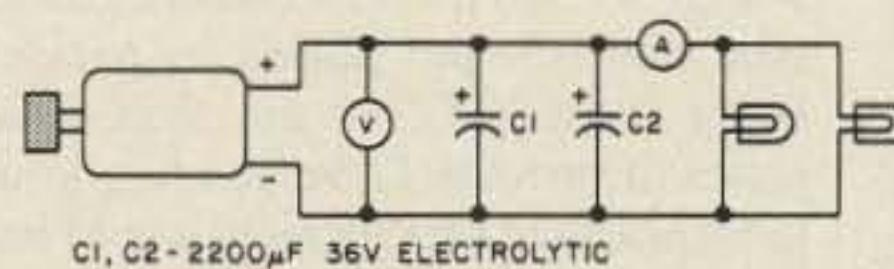


Fig. 3. Modified test circuit, with two 2,200-uF capacitors in parallel with the armature and the load.



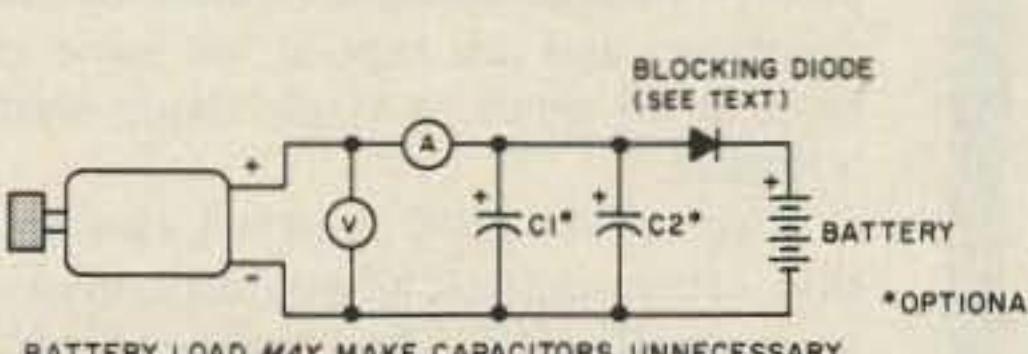


Fig. 4. Substitute a germanium diode for the silicon one and you can save a half volt or more because of the lower forward voltage drop.


A) TWO 6V (NOMINAL) BATTERIES IN SERIES-PARALLEL

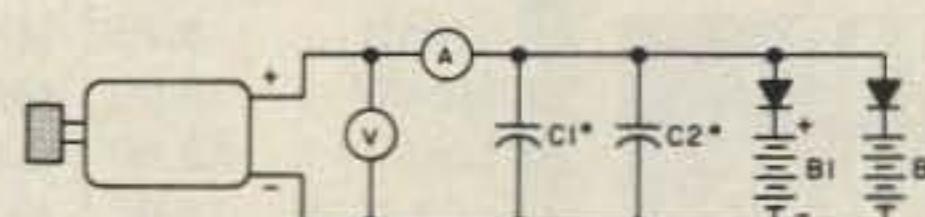

B)

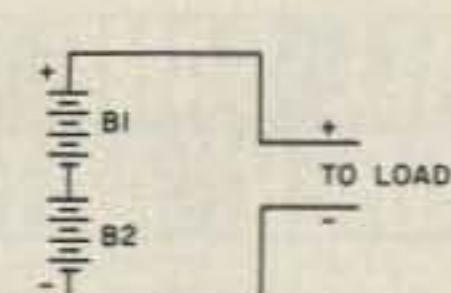

C) TWO PM MOTOR-GENERATORS IN SERIES TO CHARGE BATTERY OF 12V OR GREATER (CHECK POLARITY AND DIRECTION OF ROTATION)

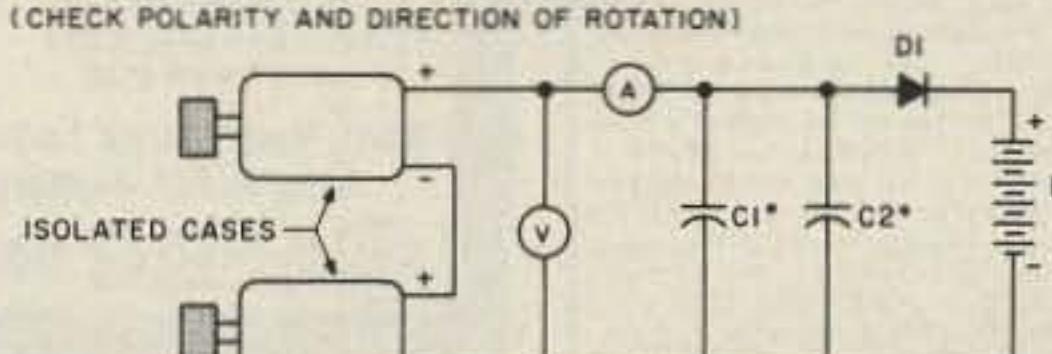

* OPTIONAL

Fig. 5. (a) Two 6-V batteries in parallel while being recharged and (b) switched to series while in use. (c) Two motor generators in series.

PACPRO[©]

Version 1.0

Packet Radio Software

—The best way to talk to your TNC—

NEW IBM VERSION

Copyright © 1986

★ FEATURES ★

Function Key Control	Auto Msg Buffers
Split Screen	Pop Windows
Auto Answer	Display Files
File Conversion	32K Receive Buffer
Connect Alarm	10 Line Type Ahead
On Line Help Screen	Auto Configuration
Ten Routing Buffers	On Line Clock
RX/TX Disk File	

\$24.95

Shipping & Handling \$2.50

Georgia Residents add State Sales Tax 4%


Method of payment: Money order or check (no COD)

Southern Software Systems

Route #1 Box 1030
Hahira, Georgia 31632
(912) 896-2640

SYNTHESIZED SIGNAL GENERATOR

MADE IN USA

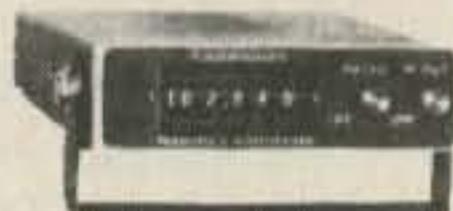

MODEL
SG-100F
\$429.95
delivered

• Covers 100 MHz to 199.999 MHz in 1 kHz steps with thumbwheel dial • Accuracy +/- 1 part per 10 million at all frequencies • Internal FM adjustable from 0 to 100 kHz at a 1 kHz rate • External FM input accepts tones or voice • Spurious and noise at least 60 dB below carrier • Output adjustable from 5-500 mV at 50 Ohms • Operates on 12 Vdc @ 1/2 Amp • Available for immediate delivery • \$429.95 delivered • Add-on accessories available to extend freq range, add infinite resolution, AM, and a precision 120 dB attenuator • Call or write for details • Phone in your order as fast COD shipment.

✓ 79

VANGUARD LABS

196-23 Jamaica Ave., Hollis, NY 11423
Phone: (718) 468-2720 Mon.-Thurs.

ALL BAND TRAP "SLOPER" ANTENNAS!

FULL COVERAGE! ALL BANDS! AUTOMATIC SELECTION with PROVEN Weatherproof sealed Traps - 18 Ga. Copperweld Wire! GROUND MOUNT SLOPERS - No Radials needed! Ground to rod or house water faucet! Connect Top to Trees, Buildings, Poles, etc at ANY angle from Straightup to 60 degrees for excellent "SLOPER" DX Antenna Gain or bend it anywhere you need to! 2000 Watt PEP Input, max. Permanent or portable Use installs in 10 minutes. SMALL - NEAT - ALMOST INVISBLE - No one will know you have a Hi-Power DX Antenna. Ideal for CONDO'S APARTMENTS - RESTRICTED AREAS - Pre-tuned for 2-1 or less SWR over ALL bands (except 80-160-300kc). No adjustments needed - EVER. COMPLETELY ASSEMBLED, with 50 ft RG-58U Coax feedline and PL259 connector. Built in lightning arrester - ready to hook up! FULL INSTRUCTIONS!

No. 1080S - 80-40-20-15-10 - 1 trap 49 ft. — \$59.95
No. 1040S - 40-20-15-10 - 1 trap 26 ft. — \$58.95
No. 1020S - 20-15-10 - 1 trap 13 ft. — \$57.95
No. 1016S - 160-80-40-20-15-10 - 2 traps 83 ft. — \$89.95
SEND FULL PRICE FOR PP DEL IN USA (Canada is \$5.00 extra for postage etc) or order using VISA, MASTERCARD - AMER EXP. Give Number Ex Date. Ph 1-308-236-5333 weekdays. We ship in 2-3 days (Per Cks 14 days) Guaranteed 1 yr - 10 day money back trial.

WESTERN ELECTRONICS ✓ 163
Dept. A7 Kearney, Nebraska 68847

TEN FM

JOIN THE FUN and EXCITEMENT!

10 FM is putting the HAM™ back into amateur radio!



\$65.00 +
\$3.00 UPS
FM 10 KIT

FM 10 includes tested HY GAIN 02A CB board. True FM discriminator/deviation kit crystal, and 6 page instructions. All you need is a chassis and CB microphone.

HAMFEST SPECIAL \$33.00

Same as above, less filter and RPT kit

DISCRIMINATOR/DEVIATION KIT \$12.95

10 MTR 100 WATT RF AMP BOARD \$4.00

HEIL, LTD. ✓ 109
Marissa, IL 62257
618-295-3000

The One-Stop Parts House for 10 FM!



WORK THE WORLD ON AN HT!


The RB-1 easily interties 2 transceivers. A 220 or 450 rig can intertie to control a fixed station. By utilizing the squelch of the new TS 430 or IC-740, the HF bands can even be worked from the HT. UHF to VHF — VHF to HF.

- Simple to connect - all connectors supplied.
- Can be used as simple RPTR control.

REMOTE BASE INTERTIE

\$49.95

+ \$3.00 shipping



RB-1

HEIL, LTD. ✓ 110
Marissa, IL 62257
618-295-3000

TUBES and IC's
FAST DELIVERY
LOWEST PRICES
call Toll Free (800) 221-5802

In-depth Inventory - Industrial & Receiving Tubes
Here are 2 dozen examples...

3-500Z	85.00	8122	135.00
572B	75.00	813	45.00
811A	15.00	MRF450	12.95
6146B	8.75	MRFY54	18.95
M2057	15.00	MRFY55	14.95
8950	12.50	MRFY92	19.95
4CX250B	75.00	6LF6	8.26
6883B	9.50	6JS6C	7.46
SG613	10.50	6CA7	6.91

CHEMTRONICS CHEMICALS

TUN-O-WASH 24 oz. \$3.89
TUN-O-POWER \$3.39
TUNER RENU 6 oz. \$1.25
FREEZE IT 22 oz. \$3.39



Major Manufacturers Factory Boxed and Full line of
Sylvania ECG Replacement Semiconductors



MINIMUM ORDER \$25.00

ANNUAL \$3.00 UPS charge

TRANSLETERONIC INC.



✓ 168

Box No. C. 1365 39th STREET BROOKLYN NY 11218

Tel. 718-633-2800/Watts Line 800-221-5802

FAX # (718) 633-4375

tempts to get the voltage up by cranking the pedals harder or reducing the load were not very successful; there was a definite "peaking out" effect around 12 volts. This was either because the windings and core of the armature were becoming saturated, or because the mechanical load resistance was causing the friction wheel to start slipping, or some combination of both.

A blocking diode is usually desirable when you're trying to recharge a battery; without one current will tend to flow back through the windings from the battery, and the generator will start acting like a motor again. The forward series voltage drop of the junction, usually on the order of 1.7 to 1.8 volts for a silicon diode, adds to the necessary voltage that must be provided by the generator to yield any meaningful amount of charging current. Taking a trick from the solar-cell people allows us to minimize this: Substitute a germanium diode for the silicon one and you can save a half volt or more because of the lower forward voltage drop. One junction of a germanium bipolar power transistor, such as the audio transistors used in many automotive broadcast radios in the late 50s, will do as well and will probably be easier to come up with in the station junk box (see Fig. 4).

If a 6-10-volt battery is adequate for your QRP and emergency power needs, this setup will be fine as is. If you really need a full 12 volts, you must resort to sneaky techniques. One possibility is to use a pair of motors as generators and put their outputs in series. If you try this, you must be careful to observe the correct polarity of output and direction of armature rotation. Also, be sure that both leads of the motors you are using are isolated from the case. If they aren't, some kind of insulated mount must be used. You may also find that two motors and two sets of friction drive rollers put a much heavier mechanical resistance on the pedals, and the output you can sustain at a comfortable level of pedaling effort may be reduced substantially—see Fig. 5(c).

A good compromise for many Field Day operations would be the arrangement shown in Fig. 5. Two 6-volt motorcycle or Gel-Cell type batteries are placed in parallel while being recharged, but are then switched to series to provide 12 volts while in use. The most practical arrangement would be to have four 6-volt batteries or banks of cells, so that one pair is always available to power the rig while the other is being charged up. Two blocking diodes act as load dividers to help maintain even charging rates in both banks of cells. If both banks have an identical internal resistance and are kept at the same charge level at all times, a single diode would be adequate.

There is no good reason I can see why this same approach wouldn't also work with small windmills, water wheels, etc. for other low-power installations. For the truly lazy, use a small gasoline moped or string-trimmer engine, thereby creating Putt-Putt Propulsion for the Pedal-Pushing Power Plant. ■



MAGGIORE ELECTRONIC LAB.

Manufacturers of Quality Communications Equipment

- Repeaters
- Links
- Remote Base
- Low Band, VHF, UHF
- Receivers
- Transmitters
- Antennas



Hi Pro 'E'

EXPANDABLE REPEATER SYSTEM

- Standard and Computerized Controllers
- Standard and Computerized Auto Patches
- Duplexers

- A NEW CONCEPT IN REPEATER DESIGN, THE Hi Pro "E" IS AN EXPANDABLE REPEATER WITH THE FOLLOWING FEATURES: A BASIC REPEATER WHICH WOULD INCLUDE A COMPLETE RECEIVER, TRANSMITTER, COR, FRONT PANEL CONTROLS AND INDICATORS, LOCAL SPEAKER AND MIC JACK AND CAPABLE OF FUTURE EXPANSION. ALL HOUSED IN AN EXTREMELY RUGGED, ENCLOSED, 19-INCH RACK MOUNTABLE CABINET.
- THIS SYSTEM CAN BE EXPANDED AT TIME OF PURCHASE OR CAN BE AN AFTER-PURCHASE ADD ON. THE ADD ONS ARE—HIGHER POWER, 110/220 VAC POWER SUPPLY, IDENTIFIER, AUTO PATCH, OR COMPUTER CONTROLLERS. IN ADDITION TO THESE ADD ONS AN ADDITIONAL RECEIVER AND TRANSMITTER CAN BE MOUNTED INTERNALLY FOR USE AS CONTROL LINKS, REMOTE BASE OR DUAL BAND OPERATION, ETC.
- AN EXTENSION PANEL IS AVAILABLE FOR LOCAL MONITORING OF THE REPEATER AND CONTAINS ALL NECESSARY METERING, STATUS LIGHTS AND INDICATORS. ALL ADD ONS ARE AVAILABLE FROM THE COMPANY AND ARE COMPLETE INCLUDING INSTRUCTIONS. THE Hi Pro "E" IS AVAILABLE IN NOVEMBER.

MAGGIORE ELECTRONIC LAB.

600 Westtown Rd.

West Chester, PA 19382

Phone (215) 436-6051

Telex 499 0741 MELCO

✓47

WRITE OR CALL FOR OUR COMPLETE CATALOG



27th ANNUAL TROPICAL HAMBOREE ARRL FLORIDA STATE CONVENTION FEBRUARY 7-8, 1987

DADE COUNTY YOUTH FAIR GROUNDS

Tamiami Park, 10901 S.W. 24 Street (Coral Way) Miami, Florida



- | | |
|---|--|
| <ul style="list-style-type: none"> • FREE PARKING 15,000 VEHICLES • 1,000 INDOOR SWAP TABLES W/POWER • LICENSE EXAMS • PACKET RADIO PROGRAMS • TECH TALKS • TRAFFIC HANDLERS BREAKFAST • WOUFF HONG INITIATION | <ul style="list-style-type: none"> • 300 CAMPSITES WITH FULL HOOKUPS • 200 COMMERCIAL EXHIBIT BOOTHS • DX FORUM & DINNER • COMPUTERS & SOFTWARE • RCA FLORIDA SECTION LUNCHEON • HAMBOREE DEALER SPECIALS • ACTIVITIES FOR NON-HAMS |
|---|--|

Registration: \$5.00 Advance . . . \$6.00 Door. Valid both days. (Advance deadline Jan. 30th)
Swap Tables, 2 days: \$16.00 each. Includes power.
All swap table holders must have registration ticket.

Campsites: \$10.00 per day, includes water, power, sanitary hook-ups, showers.
(All RV vehicles, tent campers, vans, trailers welcome — no ground tents please.)

Headquarters Hotel: Ramada Hotel, Airport, 3941 N.W. 22nd Street
Special Hamboree Rates: \$45.00 Single, Double, Triple or Quad
Reservation forms available through Dade Radio Club December 1st.

Exhibit Booth Information:
Evelyn D. Gauzens,
W4WYR, Chairman
2780 N.W. 3rd St,
Miami, FL 33125
Telephone:
(305) 642-4139

Make checks for Registration, Swap Tables & campsites payable to:
DADE RADIO CLUB, P.O. BOX 350045, MIAMI, FL. 33135


4 Page Brochure Available . . . December 1st

Holiday Buying Guide

TRANS COM CN-1

Trans Com, Inc. offers the CN-1 Packet Connect Alarm. When a connection is made to your TNC, a one-second alarm sounds alerting you to the call. The CN-1 attaches easily to any model TAPR-compatible TNC with only three connections.

The CN-1 comes fully assembled and tested for \$16.95; for more details, please check Reader Service number 251.

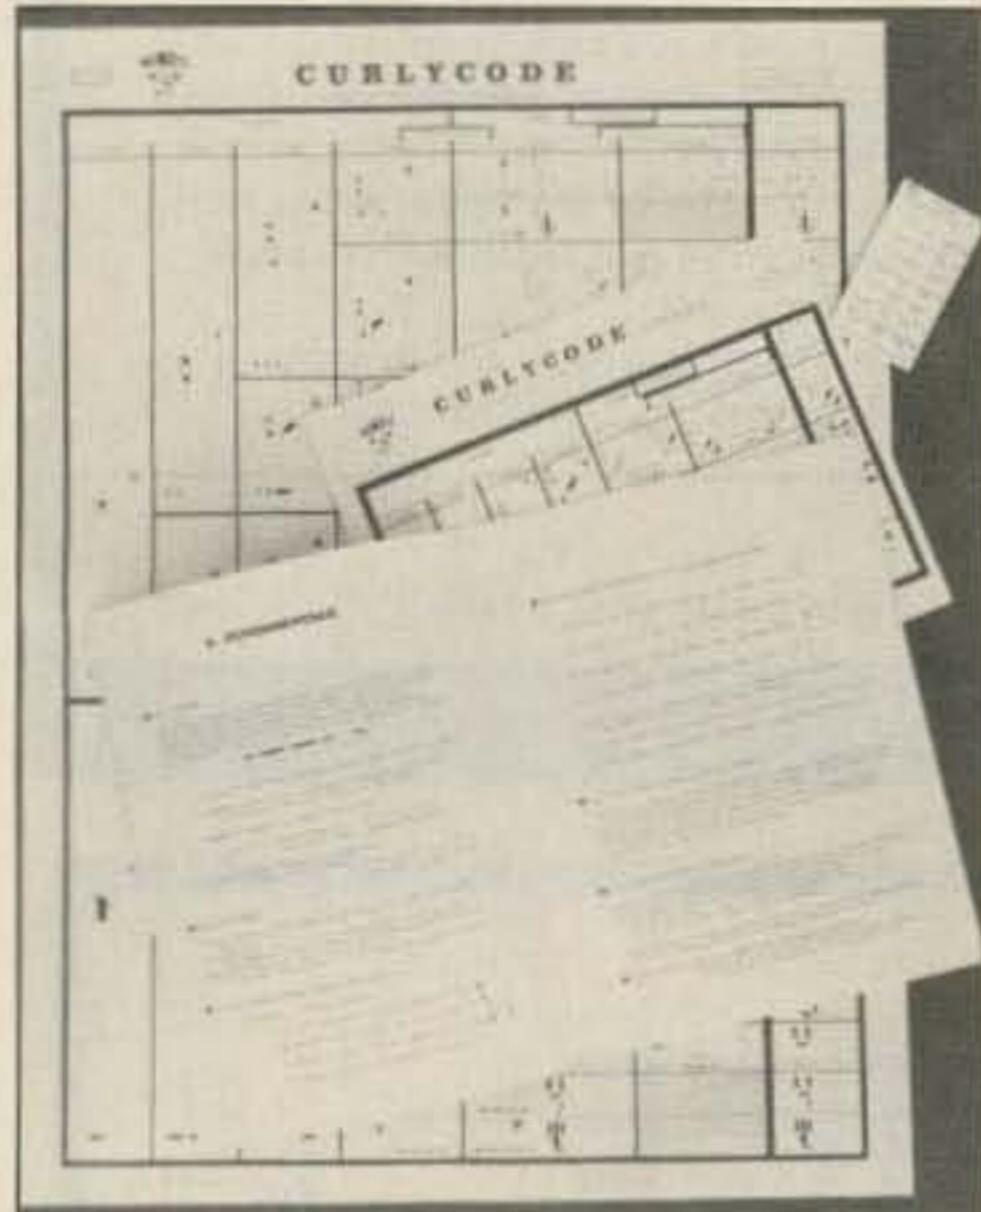

Curlycode from Mind's Eye Publications.

MIND'S EYE CURLYCODE

An unusual method for learning Morse code using rhythms and shapes is available from Mind's Eye Publications. Curlycode is a course designed either to teach code or to improve your code speed. The Curlycode system combines the rhythms of Morse code into shapes that are easily remembered; as you trace the shape you are tracing the outline of the letter being sent.

The basic Curlycode system costs \$6.50, or \$11.50 for the deluxe version, which includes wall charts and a handy pocket guide. Ten complete sets may be purchased at the discount rate of \$91.50 including postage. For more information, check Reader Service number 252.

MORSE T-SHIRTS


Imagine your callsign emblazoned in Morse code across a red, light blue, orange, white, yellow, green, or black 100% cotton T-shirt. Choose fuzzy flock Morse characters in black, red, dark blue, or white. Sizes are men's small, medium, large, and extra large; all shirts are \$14.50 plus \$2.50 postage and handling (California residents please add 6% tax).

Specify colors, size, and callsign (eight lines maximum).

For more information, check Reader Service number 253.



Fuzzy Morse T-shirts.

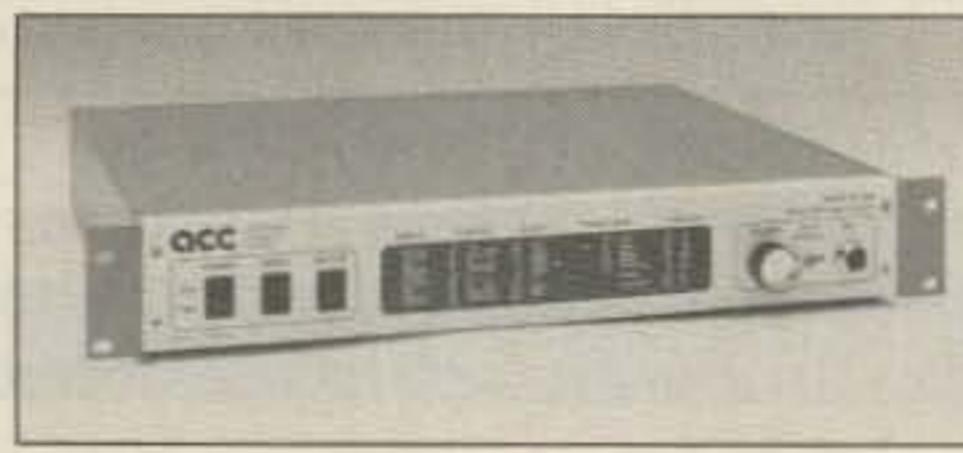

ACC's RC-850 repeater controller.

ADVANCED COMPUTER CONTROLS

Repeater Controllers

The RC-850 and RC-85 repeater controllers offer the advanced high-performance features that have made them the standard in amateur repeater operations. With the new ACC Digital Voice Recorder, repeater users can record voice messages for each other in a voice mailbox, and all of the repeaters' IDs and other messages can be stored. The ITC-32 Intelligent Touchtone™ Control Board provides extensive touchtone remote-control capabilities.

ShackMaster

ACC's ShackMaster multiplies the value of your home station by making it available for use from wherever you are. Crossband linking lets you operate your home HF station from your VHF hand-held, and telephone access lets you operate it from any telephone. Additional features include remote rotor control, a simplex autopatch, an intercom into the shack, and an electronic mailbox for communicating with the family.

For more information on ACC products, please check Reader Service number 254.

TRAC CMOS KEYER

The Trac Electronics model TE144 is just one of a full line of popular electronic keyers. The TE144 (\$65.95) is a state-of-the-art CMOS keyer with self-completing dots and dashes, dot and dash memory, iambic keying, and

speed, weight, tone, and volume controls. The keyer has its own sidetone and an internal speaker, and a rear-panel switch to allow semiautomatic or straight keying.

For more information on this and other Trac products, check Reader Service number 255.



The Trac model TE144 CMOS keyer.



Microcraft's Code Star CW/RTTY/ASCII reader.

MICROCRAFT CODE STAR

Microcraft's Code Star decodes incoming Morse, Baudot, and ASCII transmissions and displays them on its eight large LEDs. The microcomputer auto-tracks Morse from 3 to 70 wpm in two optimized ranges. An automatic gain control circuit provides up to 16 dB of gain to keep locked to signals under changing conditions.

An optional serial/parallel output kit is available which provides a 110/300-baud buffered port to drive an ASR-33 or a computer terminal.

For more details, please check Reader Service number 256.

U.S. TOWER

U.S. Tower offers a wide variety of self-supporting towers for the radio amateur. Tower heights range from 33' to 90', and prices from \$925 to \$7,195. In addition to stock towers, the company is capable of building towers to your specifications.

For more information about U.S. Tower, check Reader Service number 257.

MFJ-949C VERSA TUNER II

MFJ is proud to introduce the model 949C Deluxe Versa Tuner II. The 949C will handle

300 Watts from 1.8 to 30 MHz, and will match coax, balanced feeds, or random wires. SWR can be easily read on the large cross-needle power meter. A 200-Watt 50-Ohm dummy load is included for interference-free tuneup.

For information on this and other MFJ products, please check number 258 on the Reader Service card.



The MFJ-949C Versa Tuner II.



Kenwood's TS-440S.

KENWOOD

TS-440S

Kenwood's TS-440S HF transceiver features all-band, all-mode coverage, a 100-kHz-30-MHz general-coverage receiver, direct frequency entry from the keyboard, and a built-in antenna tuner for 80 to 10 meters. The exclusive DynaMix™ mixing system offers a true 102-dB dynamic range. 100 memory channels store frequency, band, and mode.

R-5000

The R-5000 high-performance receiver covers 100 kHz to 30 MHz in 30 bands, with additional coverage from 108 to 174 MHz (with the optional VC-20 converter installed). 100 memory channels are available for storing frequency, mode, and antenna information. Dual vfo's may be accessed directly with keyboard frequency entry. The R-5000 includes Kenwood's DynaMix mixing system for wide dynamic range, programmable scanning, and two built-in 24-hour clocks with timers.

TM-2570A

Choose one of three output power levels on 2 meters: the TM-2530A with 25 Watts, the TM-2550A with 45 Watts, or the TM-2570A with 70 Watts. All models feature 15 seven-digit telephone number memories, an auto-dialer, a high-performance GaAsFET front end, automatic repeater offset selection, and 23 memories which store frequency, offset, and subaudible tone information. Also available is the TM-3530A, a 25-Watt model for 220 MHz.

For more information about these and other Kenwood products, visit your local Kenwood dealer or check Reader Service number 259.



Azimuth's WT-80 World Time Clock.

AZIMUTH WORLD CLOCK

Azimuth Communication's new WT-80 World Time Clock features digital readouts with both local time and world time in a 24-hour format. The quartz clock operates from a single oscillator and uses a 24-position slide switch to show the time in 24 cities around the globe (UTC is displayed when London is selected). The clock also includes a button-operated light and a snooze alarm.

For more details, check Reader Service number 260.

WENZEL COUNTER-MATE

The Wenzel Counter-Mate is a personal frequency standard which provides stable 1- and 10-MHz signals to calibrate frequency counters. A third-overtone 10-MHz crystal mounted in a proportionally controlled copper oven is used for very low drift. Outputs will drive both TTL and 50-Ohm loads with a 5-ns rise/fall time square wave.

To get more information on the Wenzel Counter-Mate, check Reader Service number 261.

MJC TECHNOLOGIES SCORE

The Sweepstakes Contest Operating Results Enhancer is billed as the ultimate ARRL Sweepstakes contesting system. The software, which runs on the IBM PC and compatibles, handles all of the logging and duping tasks associated with the contest. In addition, SCORE will directly control the Heath SS-9000 transceiver and Pro-Search rotor controls; frequency and antenna direction are automatically entered into the log.

Real-time scoring information is displayed along with sections worked/needed. A variety of reports can be generated, including a complete log in callsign or contact order; a section-contact report, which lists the number of contacts for each ARRL section and the log information for the first contact in each section; an operating profile, which graphically displays band changes, QSO rates, and off periods; and a contest summary (required for Sweepstakes entries).


Demo disks are available to qualified clubs; for more details, please check Reader Service number 262.

TEXAS MAGNETICS

Texas Magnetics Corporation, the largest U.S. supplier of magnetic base assemblies for mobile antennas, is celebrating their 10th anniversary this year. TMC also manufactures Magna-Grab magnetic tool racks in two sizes; the TMC-100 is 13" long and the TMC-200 extends to 25". The racks are made of heavy-

duty chrome-plated steel and are faced with a Kydex™ color bar. No assembly is required, and all mounting hardware is included.

For complete details on the Magna-Grab tool rack, check Reader Service number 263.

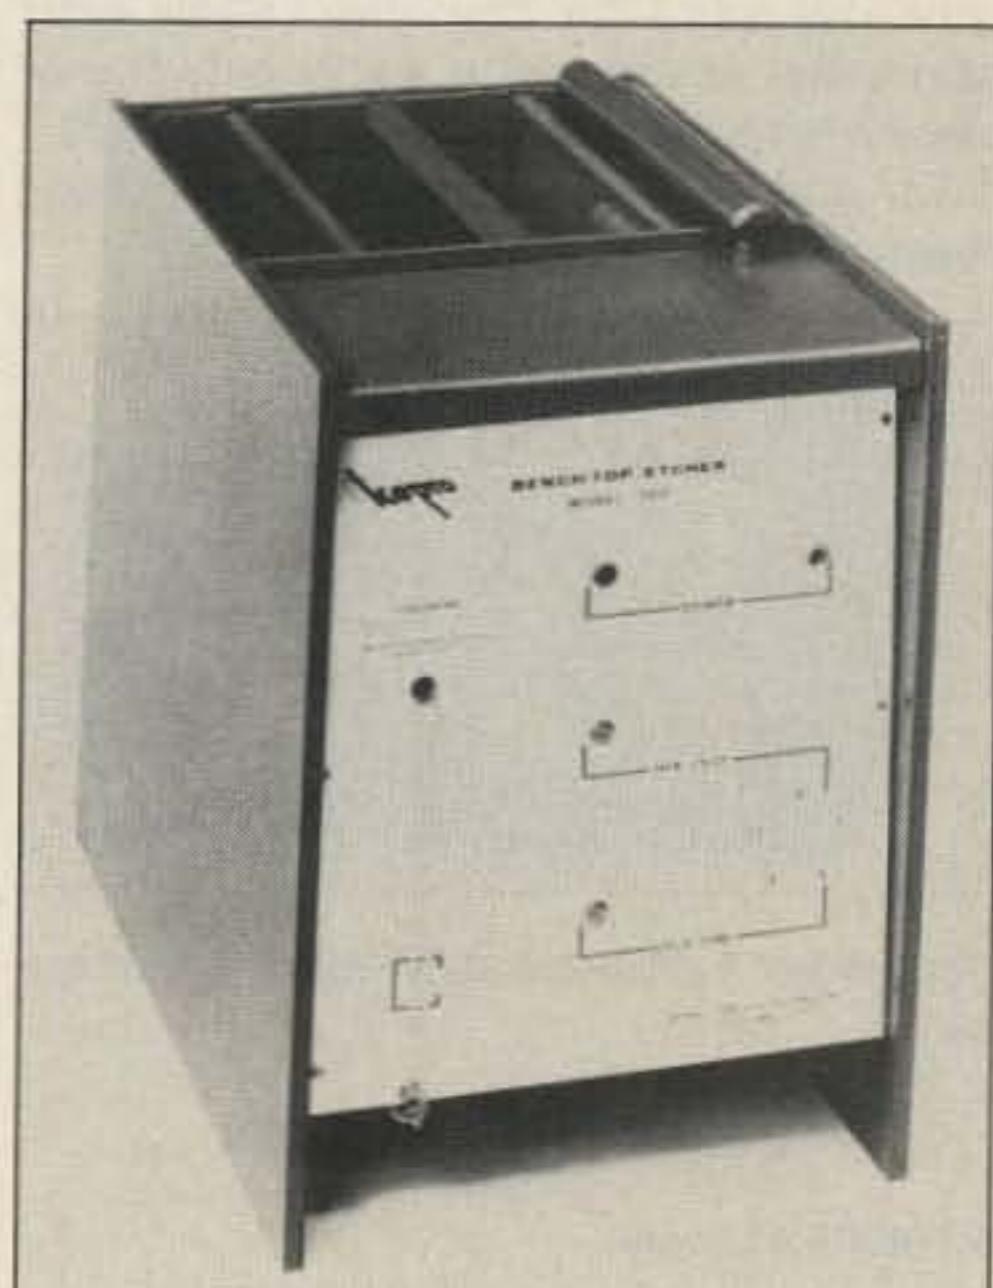


Kepro's bench-to-circuit etcher.

KEPRO PC ETCHER

This holiday season, etch a permanent smile on your favorite electronic hobbyist's face with the convenient, versatile, and economical Kepro Spray Etcher (\$765). He'll love you for it. And, with the professional results he'll get on PC boards up to 12" x 12" in just five minutes, you'll love his projects.

For more information on the Spray Etcher and other Kepro products, check Reader Service number 264.

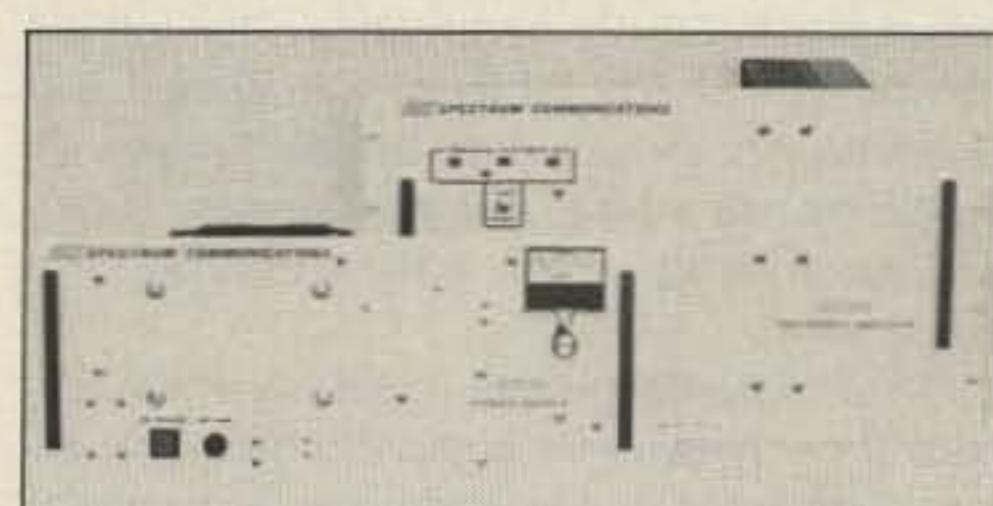

SCA-100 VHF/UHF amps from Spectrum.

SPECTRUM POWER AMPS

The Spectrum SCA-100 150-Watt VHF and 100-Watt UHF amplifiers can be used with any 10-40-Watt transmitter. Their large heat sinks and high-efficiency design ensure cool operation even when run at 100% duty cycle in a hot environment. The amplifiers also feature automatic vswr protection and automatic amplifier bypassing if the power supply fails or the amp overheats. Both amps are designed for 19" rack mounting. A companion power supply, the SCP-30, is also available.

For complete details on these and other Spectrum products, check Reader Service number 265.

SYNTHETIC TEXTILES ANTENNA ROPE

Due to the constant urging of a local ham,

Synthetic Textiles has developed a special double-braided Dacron rope for use in antenna installations. The rope is available in three sizes: 3/32", 3/16", and 5/16". The outer braid is color-sealed black Dacron for resistance to ultraviolet light. The rope unties easily even after years of use and is easily cut with an electric hot-knife (included with every spool).

For additional information, please check Reader Service number 266.



The Barker & Williamson PT-2500A linear amplifier.

BARKER & WILLIAMSON

PT-2500A Linear

The Barker & Williamson PT-2500A linear amplifier is a completely self-contained tabletop unit designed for continuous SSB, CW, RTTY, AM, or ATV operation. A pair of Eimac fast-warmup tubes provide 1,500 Watts output on 1.8–21 MHz (the amp can be modified for use in military or commercial applications). Other features include illuminated SWR and power meters, vernier tuning for quick accurate settings, and a silver-plated tank coil for maximum efficiency.

VS-1500A Antenna Coupler

The B&W VS-1500A is designed to match virtually any receiver, transmitter, or transceiver in the 160–10-meter range. The unit will deliver up to 1,500 Watts of rf to almost any antenna, including dipoles, inverted vees, verticals, mobile whips, beams, random wires, and so on, fed by coax, balanced lines, or a single wire.

Other features include a series/parallel capacitor connection for improved harmonic attenuation, an in-circuit wattmeter, and vernier tuning. Front-panel switching allows for rapid selection of antennas or a dummy load.

For details about these and other B&W products, please check Reader Service number 267.

MISSION CONSULTING

MP-25 Transceiver

Mission Consulting's MP-25 25-Watt SSB synthesized manpack transceiver covers the 2–15-MHz range in 100-Hz steps. This lightweight, immersible radio features a built-in antenna tuner and speaker, and meets MIL-STD-108. Several optional accessories are available for use in fixed operation.

Docking Booster


Boost the range of your HT while operating mobile by increasing its output to 30–50 Watts with Mission Consulting's Docking Booster.

The Booster clips onto your car door and includes a microphone clip and an optional GaAsFET preamplifier. The Docking Booster is available for most ICOM, Yaesu, Kenwood, and Santec radios.

For additional details on these products, check Reader Service number 268.



Mission Consulting's MP-25 portable transceiver.

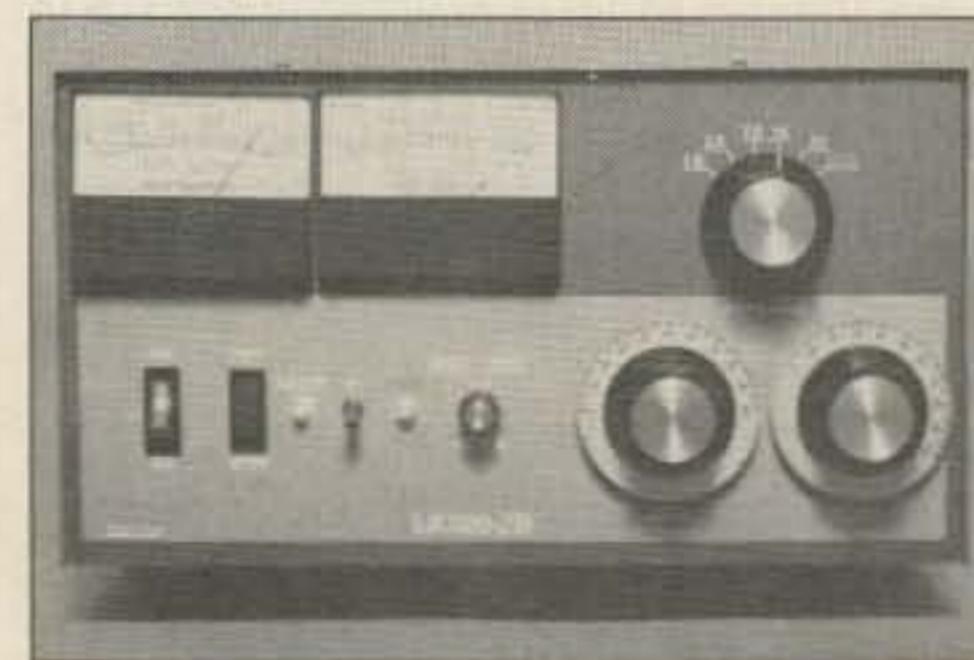

Amp Supply's LK500-ZB linear.

AMP SUPPLY LK500-ZB

This self-contained amplifier delivers 1,500 Watts of rf from 1.8–22 MHz and features a Peter Dahl Hipersil power transformer, an ITT Jennings vacuum antenna-changeover relay, and a companion sealed-relay QSK system. The HF tank coil and Centralab bandswitch are silver-plated. A no-tuneup version of the LK500, the LK500-NTB, is also available.

For further details on Amp Supply linears and accessories, circle Reader Service number 269.

CERTIFIED COMMUNICATIONS

Press Jones N8UG of Certified Communications supplies all of the wire and cable needed by hams. Certified also carries accessories such as insulators, connectors, baluns, ground rods, toroids, and so on. Custom baluns, feedlines, and center insulators can be made to order. Over 3,000 CB-to-10 conversions are in Certified's files.

For more information, please check Reader Service number 270.

RADIO WORKS

B and C Series Baluns

Radio Works' B and C series baluns, in either 4:1 or 1:1 versions, achieve a balance of wiring inductance, core characteristics, cou-

pling, and construction to produce a well-behaved broadband balun. Prices start at \$15.95.

Superloop

The Superloop is a high-performance, automatic-bandswitching loop antenna for 80 and 40 meters. The design uses a decoupling stub in combination with a Dedicated Tuning Unit at the feedpoint for reactance control. The loop is slightly short of a full wave on 80 meters and exhibits gain on 40 meters and higher bands.

A free 32-page catalog is available from Radio Works; check Reader Service number 271.



New baluns from Radio Works.



The Regency R806 crystal-controlled scanner.

REGENCY R806 SCANNER

Regency's 8-channel R806 crystal-controlled scanner is ideal for listeners who don't need a fancy synthesized unit. The R806 covers 30–50 MHz, 144–174 MHz, and 440–512 MHz. Other features include a programmable priority control, dual scan speeds, and channel lockout. The scanner is designed for mobile or home use and comes with a mobile mounting bracket, an ac power cord, a dc power cord, and a telescoping antenna.

Get more information on Regency products by checking Reader Service number 272.



The Tuner Tuner from Palomar.

PALOMAR TUNER TUNER

Palomar Engineers have announced their new Tuner Tuner™, which connects between

your transceiver and your antenna matching unit. With the Tuner Tuner you can adjust your AMU without putting a signal on the air. The built-in 50-Ohm noise bridge gives an audible null when the tuner matches the coax line to 1:1 swr.


For more information, please check Reader Service number 273.

PAC-COMM DR-100/DR-200

Pac-Comm is manufacturing packet repeater controllers designed expressly for the needs of packet radio networks and remote, unattended operation. The DR-100 provides a basic single-port controller useful for single-frequency digipeaters. The DR-200 is a dual-port controller designed to be an inexpensive, off-the-shelf packet switch for moving traffic on inter-LAN networks.

Both units are designed around the Z-80 CPU with up to 32K bytes of EPROM storage and 32K bytes of RAM. HDLC is handled by a Z-8530 Serial Communications Controller. The DR-200 has two independent 300/1200-baud modems (AMD 7910 World-Chip™), while the DR-100 has only one modem. Both models support an external terminal.

Several versions of single- or dual-port software are available at no cost through Pac-Comm. For more information, check Reader Service number 274.

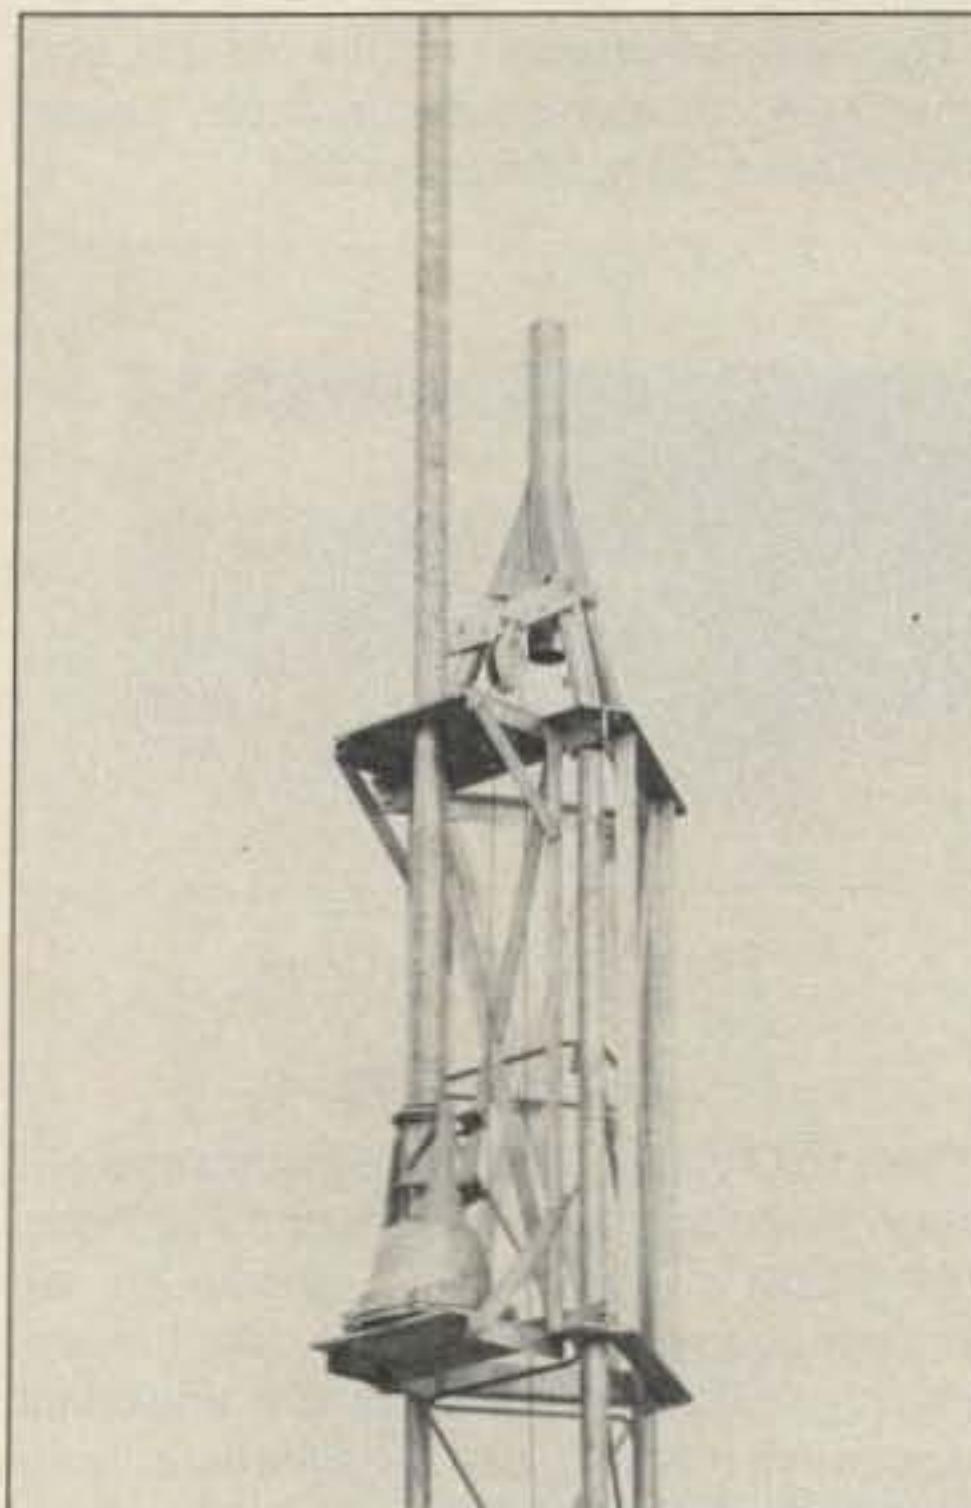

The Hazer system.

MARTIN ENGINEERING HAVER

The Martin Hazer is a unique tower accessory that raises and lowers antennas directly up and down the tower. The Hazer is assembled at ground level. An antenna and rotor are fitted to the Hazer, then the entire assembly is winched to the top of the tower. A spring-loaded safety catch engages at every cross brace. At the top, the safety catch transfers the weight of the antenna to the tower.

For more details, check Reader Service number 275.



FOX TANGO ANNIVERSARY

To celebrate his 78th birthday and the 15th anniversary of the founding of Fox Tango, president Milt Lowens N4ML has announced a spectacular sale on his 8-pole FT Crystal Filters for radios from Kenwood, Yaesu, ICOM, Drake, and Collins. Milt bought a bunch of these when the Yen was low, and until the stock runs out he will pass the savings on to you.

For more information on Fox Tango filters, check Reader Service number 276.



ICOM's μ2AT 2-meter hand-held.

ICOM MICRO 2AT

ICOM's new IC-μ2AT is a pocket-sized 2m hand-held designed to cover 139-174 MHz on receive and 140-150 MHz on transmit. The Micro features ten memories to store frequency, offset, and access tone; an LCD readout on the top panel; scanning; 1 Watt rf output; and 32 built-in subaudible tones. The HT weighs 1/2 pound and measures 2.3" x 5.6" x 1.1".

For complete details, please circle Reader Service number 277.



New 2400-baud TNC from Kantronics.

KANTRONICS

KPC-2400

The KPC-2400 Packet Communicator combines the KPC-2 300/1200-baud TNC with a 2400-baud PSK modem for high-speed packet operation. An RS-232C/TTL jumper is included to make interfacing to a terminal simple. An add-on modem is available for the TNC-1 and TNC-2 which mounts directly on top of the TNC. It adds 2400-baud packet to your station while maintaining 1200-baud operation. If you own a KPC-1 or KPC-2, Kantronics will take your old unit in trade for a new KPC-2400.

KPC-2

The KPC-2 Packet Communicator features a built-in HF modem, full duplex operation, multiple connects, and over 100 software commands. The unit comes with 128K of EPROM, 16K of RAM (expandable to 32K), and 4K of EEPROM. Any terminal program can be used with the KPC-2; Kantronics offers Pacterm programs for the Commodore VIC-20 and C-64, and the TRS-80 III, 4, and 4P.

For a free catalog of Kantronics equipment, check Reader Service number 278.

PETER DAHL

With a 516F2 Solid-State Conversion kit from the Peter Dahl Company, your power supply will run cooler and gain full protection against line transients. You get solid-state replacements for the 5U4 and 5R4 tubes, a silicon diode to replace the selenium bias rectifier, and a selenium transient suppressor.

For more information on Peter Dahl products, check Reader Service number 279.

HEIL SOUND

SS-2 Magic Box

The Heil SS-2 system contains two 5-Watt amplifiers, a 3.5" air-suspension woofer with an 8-ounce magnet, and a 1.5" hard dome tweeter. Unlike the usual "hi-fi" speaker which has a crossover of about 7 kHz, the Heil SS-2 crossover is at 1.5 kHz, right in the articulate range of an SSB signal. The amplifiers have a 4-dB gain peak in the 1.5-2.5-kHz range to give extra punch to the audio.

Headset Control System

The HCS Headset Control System from Heil is designed for the serious radio operator. The HCS is made up of the BM-10 Boom Headset,

the HCS Interface Amplifier, and the PRS power supply.


The BM-10 is specially designed for prolonged contesting. Weighing only 8 ounces, the headset can be used with one or two ear pieces and with or without the boom microphone. The microphone is an HC-4 DX Dream Machine and has a 10-dB peak at 2.1 kHz with a sharp rolloff (12 dB per octave) at 600 Hz.

The HCS Interface Amplifier contains a dual-channel 2-Watt audio amplifier with a two-input mixer. When used in stereo mode, one radio can be heard in the left ear and another radio in the right ear. An additional output allows a logger to listen in, and an intercom switch disconnects the radios to allow the operator to talk with the logger.

For more information on Heil Sound equipment, please check Reader Service number 280.



The SS-2 Magic Box from Heil Sound.

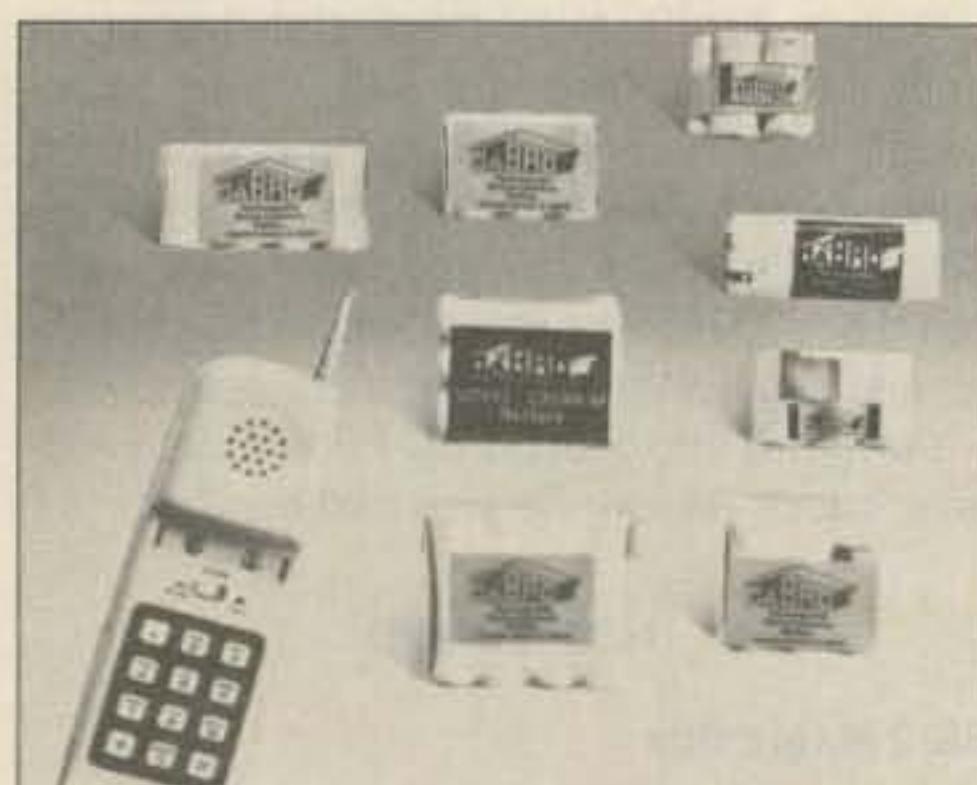

A variety of replacement nickel-cadmium batteries are available in JaBro's new catalog.

JABRO CATALOG

An updated 16-page catalog of replacement nickel-cadmium batteries is now available from JaBro. Additions to their line include replacements for the RCA Tac-Tec 747, Ritron's RT-156, and the Standard BP-11, as well as inserts for Midland models R70-B08 and R70-B12, the Repco 816 and 817, and Motorola's MH-70 and MH-10.

For more information, check Reader Service number 281.




Coaxial Dynamic's model 81000-A rf wattmeter.

COAXIAL DYNAMICS

The model 81000-A Directional Rf Wattmeter is an inexpensive test instrument designed to measure forward or reverse power in coaxial transmission lines. Forty-seven standard and forty-seven special plug-in elements are available, covering power levels from 100 milliwatts to 5,000 Watts and frequencies from 2 MHz to 1,000 MHz. The 81000-A comes with N connectors, but any connector may be specified, including 7/8" silver flange. Maximum vswr is 1.05:1 with N connectors installed.

The 81000-A is one of a series of economical rf test equipment from Coaxial Dynamics; for more information, check Reader Service number 282.

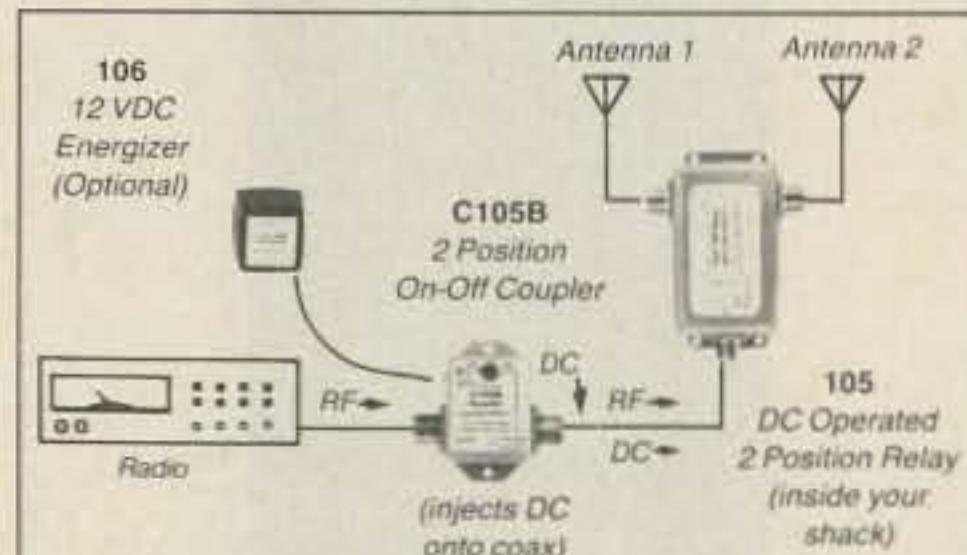

Antennas Etc.'s remote switching system.

ANTENNAS ETC.

Baluns

Antennas Etc. offers a complete line of W2AU and W2DU baluns for both HF and VHF installations. Models are available to handle up to 9,000 Watts from 1.8–30 MHz and up to 4,000 Watts from 30–300 MHz in 1:1 and 4:1 configurations. W2AU ferrite-core baluns are \$17.95, and W2DU non-ferrite baluns are \$19.95.

Remote Switching

A remote switching system is available from Antennas Etc. which allows you to feed multiple antennas off of one coaxial feedline. The

C105B system will handle up to 1250 Watts from 1.5–180 MHz, and uses a remote dc relay for switching.

For complete details on these products, please check Reader Service number 283.



AEA's PK-232 Pakratt.

AEA PK-232

The new AEA Pakratt model PK-232 is a multimode data controller with the ability to connect any RS-232-compatible computer or terminal directly to a transceiver. The PK-232's internal software handles the decoding, signal processing, and protocol for CW, Baudot, ASCII, AMTOR, and packet operation. Twenty-one front-panel indicators are used to display the operating mode and status.

The PK-232 uses an eight-pole bandpass filter followed by a limiter discriminator with automatic threshold correction. The internal modem automatically selects the correct filter parameters.

For more information on the PK-232 and other AEA communication products, please circle Reader Service number 284.



The Alpha 78 from ETO.

ETO ALPHA 78

The ETO Alpha 78 is a self-contained HF linear power amplifier capable of 2,000 Watts PEP (SSB) or 1,000 Watts constant-carrier continuous operation. It is manually tunable from 1.8–2.0 and 3–22 MHz; four additional bandswitch positions provide no-tuneup operation at the full legal limit on 80–15 meters. The 78 is capable of QSK CW and features full-cabinet forced-air cooling with a ducted exhaust.


For more information, check Reader Service number 285.

UNTENNA HI-RIZER

The engineers at Untenna have taken a full-sized 40–10-meter vertical and wound it down to a manageable size: 15 inches. Three mounting options are available: a magnetic or clamp mount for use over a large metal surface and a ground screen. The ground screen is a 24" x 30" piece of hardware cloth and only acts as a ground plane on 15 and 10 meters.

20- or 40-meter operation is accomplished by using a 1/2-wave length of coaxial cable (furnished), making a 3/4-wave system on 40 meters and a 5/4-wave system on 20 meters. Tuning is done by tapping the helical radiating element and extending the two capacity-hat whips.

For more details on Untenna products, check Reader Service number 286.

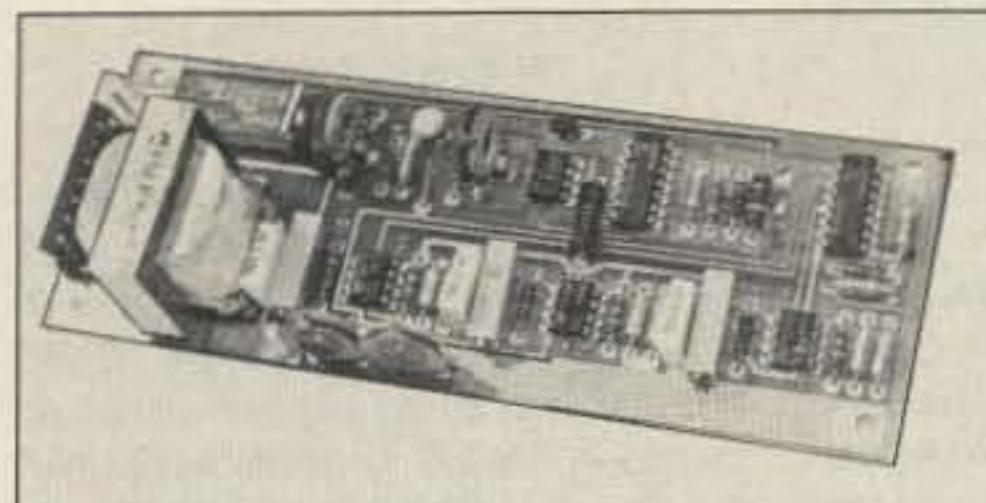

Melco's Hi-Pro BAP.

MELCO BAP

Maggiore Electronic Laboratory (Melco) now offers the Hi-Pro Basic Auto Patch, a single-board controller with all of the functions necessary to implement an auto patch. Features include an adjustable dual-tone two-digit decoder, an adjustable time-out timer, an external disable line, single-supply power, and

full-duplex operation. The unit draws only 30 mA at 10–15 V dc.

For more information, please check Reader Service number 287.



Ten-Tec's RX325 general-coverage receiver.

TEN-TEC RX325

The RX325 is Ten-Tec's newest general-coverage receiver. The rig is fully synthesized from 300 kHz to 30 MHz and features 25 memories, an S-meter with a SINPO scale, a built-in rf preamp, programmable band and memory scanning, and 12 V dc or 120 V ac operation.

For more details, please check Reader Service number 288.

ASTATIC D-104 SILVER EAGLE

Astatic's D-104 Silver Eagle is the result of

50 years of research. It combines a vibrant chrome finish and engraving with a versatile microphone system. The D-104 Silver Eagle will make any rig look as good as it sounds.

For more details on Astatic products, check Reader Service number 289.



The D-104 Silver Eagle.



P.O. Box 4405
220 N. Fulton Ave.
Evansville, IN 47710
Store Hours
MON-FRI: 9AM-6PM
SAT: 9AM-3PM
CENTRAL TIME

WARRANTY SERVICE CENTER FOR:
ICOM, YAESU, TEN-TEC

TERMS:
Prices Do Not Include Shipping.
Price and Availability Subject to
Change Without Notice
Most Orders Shipped The Same Day

COD's Welcome

ALL YOUR PACKET FAVORITES INCLUDING AEA, KANTRONICS, MFJ, etc....



FT-767

- HF/VHF/UHF Base Station
 - Plug-in Modules for 6m, 2m, 440 MHz
 - Loaded with Features
- \$ SPECIAL PRICE \$**




CORSAIR II

- You have to hear it to believe it!
- Lowest Noise, Cleanest & Most Selective
- HF Transceiver Around—AMERICAN MADE



FT-727R

- Dual Band Handie
 - 5 Watts Power on 2m & 440 MHz
 - 10 Memories
 - Battery Saver
- \$ SPECIAL PRICE \$**

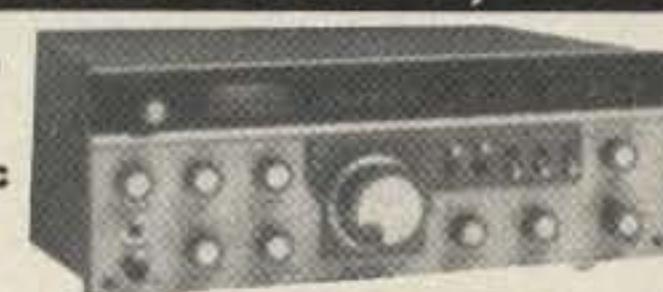

IC-751A

- All HF Band Transceiver/Gen. Coverage Receiver
 - All Modes, All Top-of-the-Line
- \$ SPECIAL PRICE \$**



IC-735

- Large Selection of Meters
 - Always on Hand
- \$ SPECIAL PRICE \$**

DISCOUNTS ON RIGS AND ACCESSORIES FROM:

AEA, ARRL, ALINCO, ALLIANCE, ALPHA-DELTA, AMECO, AMERITRON, AMP SUPPLY, ASTRON, ANTENNA SPECIALISTS, BENCHER, B & W, CSI, CALLBOOK, DAIWA, ENCOMM, HAL, HEIL, ICOM, KDK, KENPRO, KANTRONICS, MFJ, MICROLOG, NYE, PALOMAR, ROHN, SANTEC, SHURE, TE SYSTEMS, TEN-TEC, TOKYO HY-POWER, VIBROPLEX, WELZ, YAESU

For Orders and Price Checks Call 800-523-7731

Indiana call 1-812-422-0231
Service Dept. 1-812-422-0252

SPECIAL EVENTS

RICHFIELD MN NOV 1

The Twin City FM Club will sponsor the second annual Hamfest Minnesota and Computer Expo on November 1, from 7:30 a.m. to 3 p.m., at Richfield High School, 7001 Harriet Avenue South, Richfield, Minnesota. Admission is \$3 in advance, \$4 at the door. FCC exams given. Talk-in on .16/.76. For more information or advanced registration, send an SASE to Hamfest Minnesota and Computer Expo, Box 555, Minneapolis MN 55440, or to Lyle Vogt KA0UDL, 5130 Willow Lane, Minnetonka MN 55345.

LAWRENCEVILLE GA NOV 1-2

The Alford Memorial ARC of Stone Mountain will sponsor Ham Radio and Computer Expo '86 on November 1-2, from 9 a.m. to 5 p.m. Saturday and from 9 a.m. to 4 p.m. Sunday, at the Gwinnett County Fairgrounds, 20 minutes northeast of Atlanta. Admission is \$4 in advance, \$5 at the door. VEC license exams given both days. Talk-in on 146.16/.76 or 449.250/444.250. For more information, contact the Alford Memorial ARC, PO Box 1282, Stone Mountain GA 30086, or call N8LM at (404)-925-7615.

SOUTHFIELD MI NOV 2

The Oak Park ARC will hold its largest Swap-N-Shop on November 2, from 9 a.m. to 5 p.m., at a new location: the City of Southfield Civic Pavilion, Evergreen Road, between 10 and 11 Mile Roads in the northwest Detroit suburb of Southfield, Michigan. Admission is \$4, children under 12 free, VE3s at par. Tables \$10. Fire regulations restrict the number of tables. Advanced reservations required. Talk-in on DART 146.04/.64 and 146.52. For further information, send an SASE to OPARC Swap-N-Shop, 303 South Vermont Avenue, Royal Oak MI 48067, or call the Swap-N-Shop hotline: (313)-399-3991.

SELLERSVILLE PA NOV 2

The RF Hill ARC will conduct its 11th annual hamfest on November 2, beginning at 8 a.m., at the Pennsylvania National Guard Armory, PA Rte. 152, Sellersville, Pennsylvania. Admission is \$4 per ham, with accompanying non-ham spouse and children admitted free. Dealer space is \$8 per 8-foot by 6-foot space inside and \$6 per 8-foot frontage outside. No tables provided. Talk-in on 144.71/145.31, 146.28/146.88, or 146.52. For additional information or to reserve space, call Frank Benner W3BRU at (215)-257-2450, or write Hamfest Chairman, RF Hill ARC, 523 Vine Street, Perkasie PA 18944.

LAS VEGAS NV NOV 7-8

HAM/WEST and the ARRL Nevada State Convention will be held all day November 7 and 8 at the Hacienda Hotel in Las Vegas, Nevada. Advance registration is \$12 before October 24 or \$15 at the door. For all info, see the ad on page 11 of this issue or contact HAM/WEST, PO Box 19675, Las Vegas NV 89132; (702)-361-3331.

DALLAS/FORT WORTH TX NOV 7-9

AMSAT will hold its fourth annual Space Symposium and Annual Meeting at the Dallas/Fort Worth Airport Hilton Hotel on November 7-9. Speakers at the Saturday symposium include experts from around the world who will address the latest in OSCAR news including FO-12, Phase 3C, and the new Phase 4 program. For additional details and registration information, call AMSAT HQ at (301)-589-6062.

NEWMARKET ONT NOV 8

The York Region ARC will hold the 10th edition of The Newmarket Flea-market on November 8, from 0900 to 1500, at Huron Heights Secondary School in Newmarket, Ontario. General admission is \$3, children under 12 are admitted free. Tables are \$5 and must be reserved in advance. Contact Geoffrey Smith VE3KCE at 7 Johnson Road, Aurora, Ontario L4G 2A3, Canada; (416)-727-6672 (after 1830). Talk-in on 146.520 and 147.225/147.825. The Radio Society of Ontario will be organizing seminars beginning at 1600 at St. Andrew's College, 300 Yonge Street North, Aurora, Ontario. For information about a banquet following the seminar, contact Evan Herriott VE3IND, 8 Lindal Avenue, Scarborough, Ontario M1L 1W8, Canada; (416)-757-4284 (after 1630).

HOT AIR BALLOONS NOV 8

The L'Anse Creuse ARC will celebrate the flight of hot air balloons on November 8, from 1200-1500 and 2000-2230 UTC, by operating from hot air balloons on 7.263 ± QRM and 147.420. Alternate weather date will be November 15. For certificate, please send QSL and 9 x 11 SASE to A. C. Koch KA8JJN, 23682 Kim Drive, Mt. Clemens MI 48043.

FORT WAYNE IN NOV 9

The Allen County Amateur Radio Technical Society will present the 14th annual Fort Wayne Hamfest on November 9, from 8 a.m. to 4 p.m., at the Allen County Memorial Coliseum on Coliseum Boulevard (U.S. 30). General admission is \$3.50 in advance, \$4 at

the door, children 11 and under free. Standard tables \$10, premium tables \$25. Talk-in on 146.28/.88, 443.8/448.8, and 147.255/.855. VE exams given on Saturday, November 8 with advance registration only. For more information or reservations, contact ACARTS Hamfest, PO Box 10342, Fort Wayne IN 46851. For information only, call Bernie Holm K9JDF, Hamfest Chairman, at (219)-485-0164 between 6 and 10 p.m. EST; no reservations accepted by telephone.

NORTH HAVEN CT NOV 9

The SCARA annual indoor flea market will be held on November 9, from 9 a.m. to 3 p.m., at the North Haven Park and Recreation Center in North Haven, Connecticut. Admission for buyers is \$2. Tables \$10 in advance, \$15 at the door (if available). For information or table reservations, send an SASE and phone number to SCARA Flea Market, PO Box 81, North Haven CT 06473. Reservations must be received by November 3. For information only, contact Brad at (203)-265-6478 (7-10 p.m.). No reservations will be taken by phone.

"PAPPY" WADE MEMORIAL NOV 9

In observance of Veterans' week, members of the Hamfesters RC will operate the club's 2nd annual special-event station from the Hines V.A. Hospital's Robert K. "Pappy" Wade K9CDH Memorial Ham Shack, using the Hine's club call K9WFN, on November 9 from 1500-0300 UTC (9 a.m. to 9 p.m. local time). The club will operate on 40m, 20m, 2m FM, and 2m USB. Frequencies to be used are 14.260, 7.260, 146.43, and 144.210. Send QSL, QSO number, and a 9 x 12 SASE to Hamfesters Radio Club, Inc., Chicago, c/o Robert K. "Pappy" Wade Memorial Ham Shack, Bldg. 8, Hines Veterans Administration Hospital, Hines IL 60141.

VETERANS DAY NOV 9-11

Armed Forces Amateur Radio Net will operate from 1700 UTC November 9 to 2400 UTC November 11, on 10-80 meters, in recognition of Veterans Day. Frequencies: phone—7.283 and 3.920-3.925; CW—7.000. Contact any AFAR member. Send a #10 SASE to WB1DWR AFAR Net, 16 Berkeley Circle, Newington CT 06111.

MILWAUKEE WI NOV 15

The Milwaukee Repeater Club will sponsor the 2nd annual 6.91 Friendly Fest on November 15, from 8 a.m. to 1 p.m., at The Eagle's Club, 24th and Wisconsin Ave, Milwaukee. Tickets are \$3, 4-foot tables are \$4. To save \$1 per ticket or table, send SASE with payment to The Milwaukee Repeater Club, PO Box 2123, Milwaukee WI 53201, before November 8. Talk-in on 146.91/.31 and 146.52. Exams given at 9 a.m.

ORANGE NJ NOV 16

The West Orange Repeater Club will hold a hamfest on November 16, from 9 a.m. to 3 p.m., at the Orange Elks, 475 Main Street, Orange, New Jersey. Admission is \$3 for buyers, \$10 for sellers (per table). Talk-in on 224.80 or 146.550. For further information and ticket reservations, call Mike or Rob at (201)-674-0507 any time.

MASILLON OH NOV 16

The Massillon ARC will sponsor Auctionfest 86 on November 16, from 8 a.m. to 5 p.m., at the Massillon K of C Hall, off Rte. 21, in Massillon, Ohio. Admission is \$3.50 in advance, \$4 at the door. Tables available at \$7 per 8-foot space. Talk-in on 147.78/.18. For advance registration and information, contact MARC, PO Box 73, Massillon OH 44646. Include an SASE.

BILLERICA MA NOV 22

The Honeywell 1200 RC (sponsor of the 147.72/.12 repeater) and the Waltham ARA (sponsor of the 146.04/.64 repeater) will hold their annual amateur radio and electronics auction on November 22, beginning at 10 a.m., at the Honeywell plant, 300 Concord Road, Billerica, Massachusetts, Exit 27 off Rte. 3. Talk-in on both repeaters. For more information, contact Doug Purdy N1BUB, 3 Visco Road, Burlington MA 01803.

GREENSBORO NC NOV 22-23

The Mark 4 RC will hold its 6th annual Greater Greensboro Hamfest on November 22-23, from 9 a.m. to 5 p.m., at the National Guard Armory, Franklin Blvd., Greensboro, North Carolina. Admission is \$4 in advance, \$5 at the gate. \$9 for 6-foot inside flea-market table. Walk-in exams will be given by AE4N/Mark 4 VEC; call (919)-852-1087. For general information or advance tickets, contact Fred Redmon N4GGD, 3109 Goodall Drive, Greensboro NC 27407; (919)-852-9244 (9-11 p.m.)

OAK PARK MI NOV 30

The Oak Park High School Electronics Club will hold the 17th annual Swap-N-Shop on November 30 at Oak Park High School, Oak Park MI 48237. Donation is \$2. \$8 for an 8-foot table.

XMASTIME AWARD DEC 1-31

The Hen House Gang will be sending out the Christmastime Bethlehem and Santa Award during the month of December. Operation is on 10m, 20m, 40m, and Novice CW. For the Santa envelope and fold-up card, send a first-class stamp only; envelopes will be provided. For more information, write to the club president, Robert J. O'Neil W1FHP, Hard Hill Road, Bethlehem CT 06751.

- See a change in your Challenger
- Put some fun in your Flescher
- Get your CP-1 in the chips
- Really motivate your MFJ
- Heat-up your HAL and hop-up your Heath with the . . .

AIRDISK

AND AIR-ROM CARTRIDGE For both the COMMODORE 64 and VIC 20 (Soon for the new C-128)

Works with all these fine terminal units to bring you the ultimate in RTTY/CW/AMTOR performance. New AMTOR+ program with variable PTT delay for slower rigs and high rate bit sync to compensate for computer clock crystal variations. It's the best \$39.95 you'll

ever spend to improve your station. Don't have a disk drive, then use the ROM cartridge at \$59.95. On performance and features vs. cost, nothing even comes close! No complicated menus to bog you down. No limited performance programs here. The AIRDISK will enhance **any** demodulator. Disk works with both computers. Specify which for cartridge.



Commodore and VIC 20—trademarks of Commodore Electronics. Copyright ©1985 MICROLOG CORPORATION



HERE ARE A FEW OF ITS MANY FEATURES:

- on screen tuning indicators • full or split-screen
 - auto-load memories* • output to commodore printers • full speed operation, morse to 99 wpm. Baudot to 132 wpm, ASCII to 300 Baud • 4 mode AMTOR • WRU • independent RX/TX normal/invert
 - pitch reference CW tuning • real-time disk communication* • break buffer • random code generator • RX/TX of basic programs* • 24 hr. clock • unshift or space • foxtrot and more.
- 18713 Mooney Drive Gaithersburg, Md. 20879
301 258-8400

*Disk only

MICROLOG[®]

INNOVATORS IN DIGITAL COMMUNICATION

DOCKING BOOSTER

Converts Your
HT to a Powerful
Mobile Unit



NAVAL ELECTRONICS, INC.
5417 Jetview Circle • Tampa, FL 33614
Phone: 813-885-6091 • Telex: 289-237 (NAVL UR)

✓151

WORLD-TECH PRODUCTS

KNOW THE TIME ANYWHERE, EVERWHERE, INSTANTLY

- 12/24 Hour Time Piece.
- Dual Dial World Time Clock.
- Easy to read local time in cities around the world.
- Daylight/Nighttime shown on 24-hr. dial.
- Accuracy assured to ± 15 seconds per month with quartz movement.
- Time piece diameter 6 1/2".
- Uses 1 "AA" battery not included.
- Guaranteed for one year.

A UNIQUE GIFT ITEM.

ORDERS ONLY CALL 24HRS/7 DAYS

1-800-835-2246
Ext. 216

Florida residents add 5% sales tax.
Within the Continental U.S.A. please add \$2.50
shipping and handling.

WORLD-TECH PRODUCTS, INC.
1233 Kapp Dr., Clearwater, FL 33575
(813) 442-5862

✓154
C.O.D.'s
Acceptable



SALE PRICE
\$74.95
Reg. \$89.95
M3104L LUCITE



NEVER SAY DIE

from page 14

So, let me know if you actually need to have a contest to get you to fulfill your civic responsibilities and work some Novices. We can have the Work A Young Novice Event certificate, keeping you up all night over a weekend or two collecting Novice contacts. I think we'll get 'em more involved with amateur radio if you'll actually talk with them—maybe Elmer a little. Let 'em know hamming really is fun.

If you do this and it works—write. If you do it and it bombs for you—write. If you don't do it go soak your head and let me know how that feels. Soaking one's head isn't like it was when I was a kid and there was that rain barrel of icy cold water out by the back door. We saved the rain water to rinse out things—like thunder jugs. Know what they are? Or watering the garden.

What else can we do to help make hamming enough fun for Novices so they'll go for a General? Any ideas? We're working on a series of articles to help 'em understand how radio works—and electronics. With Bash gone, what'll we do—what'll we do?

HAM POVERTY

Not to beat this to death, but the more I read the business magazines, the more I find them echoing my sentiments. INC had a particularly interesting article on why blacks have fallen so far behind economically. Both the Asians and the Hispanics have zoomed way ahead of blacks in family income.

The article pointed out that one basic problem has to do with the black perception of success—a cultural problem. They look upon ministers, teachers, and government workers, rather than businessmen, as successes. Thus,

instead of starting small businesses, blacks tend to go for low-paying, but to them more prestigious jobs.

Indeed, even when blacks go into business successfully they do not gain prestige in the eyes of other blacks. Blacks in business complain that their fellow blacks refuse to patronize them. You don't see that with Hispanics or Asians. These groups are very protective and supportive of their entrepreneurs.

When I visited Kenya and Uganda twenty years ago, I wondered why there were virtually no black-run small businesses. I talked about this with the local black people and found that blacks wouldn't support black-run stores, preferring to shop at Indian-run stores. Even when the black governments, in desperation, funded black business start-ups, they failed.

In my recollection no other group of American immigrants has done this to themselves. The Irish made sure that Irish-run businesses got their business—as did the Italians when they arrived—and the Jewish.

When you consider that half of the jobs in our country are in small businesses, and about 90% of the more recent new jobs are in this fast-growing sector, it's obvious that entrepreneurs and small business are by far the most important to nurture for the growth of our country.

We've been losing manufacturing jobs to lower-wage countries—and we'll lose more, no matter how the government fiddles with protectionism. If it weren't for our keeping out foreign agricultural products and supporting the higher U.S. prices for food, we'd probably lose our farming industry, too. This has led to the ridiculous situation where Senator Dole, in order to protect

his state's farmers, has forced the U.S. to pick up a good deal of the tab on wheat sent to Russia—which helps keep down the Russian costs of decimating Afghanistan and escalates our deficit by about \$30 billion. Is Dole someone we're seriously considering for president?

So what does all this mean to you, the 73 reader? Well, unless you're already into being an entrepreneur, you're probably having to make tough decisions. As you get to be my age and the doom of retirement hangs over you, you're suddenly very aware of the minuscule dole you're going to get back for all those dollars you thought you were investing in Social Security. The government has been careful not to let it be widely known that this has been primarily a tax, not insurance. So, as Eisenhower put it, they've taken away your dollars and will give you back dollarettes. And not very many of 'em either. Great scam! Certainly you won't get enough so you can comfortably subscribe to 73, QST, CQ, and Ham Radio every year. And not enough so you can join me for a few days on an occasional Caribbean DXpedition—or a fun trip to Asia.

Perhaps you've noticed that once women started working in larger numbers, generating two incomes per family, the prices of houses and cars adjusted to the higher family income—as has almost everything else. It's almost entirely the extra money from two-income families which has made it possible for most small businesses to get started.

You as an amateur have an edge on being an entrepreneur. First, your family income is way above average. Second, you have a better than average education. Third, you have a decided edge in technology, which is where the bulk of the opportunities lie for starting new businesses.

Unless you've wasted your opportunities as a ham to learn about electronics, you're in a great position to start a small spare-time business at home. I'd

like to hear from readers who've done this so other 73 readers can get ideas. I know there's an almost infinite need for technicians able to repair computers. And that's sure easy to get into. First you buy your own computer. It will break (that's a guarantee). After you've sweated out your own you'll find friends begging you for help. Jump at it and learn all you can. Start passing the word—then perhaps your business card to local businesses. The next thing you know your kitchen, garage, and cellar will be piled with computers waiting for you to fix and your phone will be ringing day and night as frantic businessmen plead to get 'em back so they can keep their businesses going.

I've mentioned the enormous opportunities in security installations for homes and businesses. A new home business is developing in desktop publishing, where a \$10,000 investment puts you into business.

If you're short on imagination you should be reading magazines such as Success, INC, Business Week, Forbes, and so on. They're filled with ideas. I also get ideas from reading the science magazines such as Discover, Omni, Popular Science, and so on. If I could find the support people to make things happen, I could get a hot new business started at least once a week. Sadly, finding people with the ability and enthusiasm to take an idea and make it work is extremely difficult.

Oh, I try. I recently mentioned a chap I hired who had every opportunity and blew it by building a large staff and endlessly planning, but no sales. Now he's mad at me because he was finally—after wasting several hundred thousand dollars—fired. Another chap was given one potential small business after another to start up—blew 'em all. Nice chap, but unable to either follow directions or replace them with intelligent decisions.

Continued on page 98

1986-87 CALL DIRECTORY

(on microfiche)

Call Directory	\$8.
Name Index	\$8.
Geographic Index	\$8.
All three—\$20.	

Shipping per order \$3.
BUCKMASTER PUBLISHING
Mineral, Virginia 23117
703:894-5777

56

NEW 20-PAGE CATALOG FREE

7 MILLION TUBES

Includes all current, obsolete, antique, hard-to-find receiving, transmitting, industrial, radio/TV types. **LOWEST PRICES.** Major brands in stock. Unity Electronics Dept. S P.O. Box 213, Elizabeth, N.J. 07206



1-800 USA 9913 ORDER LINE

BELDEN 9913 low loss	185/500 ft. or .38/ft.	VIBROPLEX
BELDEN 8267 RG-213	195/500 ft. or .39/ft.	KEYER/PADDLES
BELDEN 8214 RG-8	149/500 ft. or .33/ft.	MFJ
BELDEN 8237 RG-8	145/500 ft. or .32/ft.	ANT TUNERS
BELDEN 9258 RG-8X	80/500 ft. or .17/ft.	ACCESSORIES
AMPHENOL Connectors & Adapters		
UG-21D	N-type Male Cable end \$3.00	
UG-21D	Fitted for 9913 cable \$4.50	
PL-259	UHF Plug [silver] \$1.65	
UG-146	N plug to UHF jack \$7.50	
UG-83	N jack to UHF plug \$8.50	
UG-29	N-type barrel conn. \$4.75	
SETH THOMAS 13-inch 24-hour station clock	\$28.95	
QEP's SAME DAY SHIPPING		
110-4 Route 10, E. Hanover, N.J. 07936, 201/887-6424		

Talk to the World With Your Computer!

NEW RTTY/CW Interface and Program Cartridge for the VIC-20, C-64 and C-128!

As reviewed by Lew McCoy, W1ICP for CQ Magazine! (Nov. 85)

Check these EXCLUSIVE features not found in any other T/U!

- Automatic RTTY scanning: Baudot 60-66-75-100-132 ASCII 110-300 plus Invert & repeat!
- Tape all incoming or outgoing data "on the fly" WHILE OPERATING!
- Tape or load at 16K/min rate! (Almost as fast as a disk.) Tape starts/stops automatically.
- Tape search! (Monitor displays only what you are searching for on tape.)
- Self Test! (No test equipment required for T/U check out.)



The Merlin Line

OTHER FEATURES

- Completely crystal controlled on transmit
- Complete KYBD control, no switches
- Screen display of operating modes and memory size
- Automatic CW tracking 5-127 wpm
- MSO (RBBS) program
- Logging program
- KYBD selectable HI/Low tone pairs to take advantage of filters in your receiver
- Will operate CW, MCW, Break CW
- CW speed lock
- On-screen tuning indicator
- Split screen
- On-screen clock
- Logging scratch pad
- RTTY sync
- Edit mode
- 26 instant call-up message buffers plus memory filing system
- In MSO (RBBS), user may assign read, write, list & delete codes
- Extra memory may be added for larger MSO, etc.
- Memory can be scrolled, edited, re-transmitted, taped, etc.
- Will also transmit number of bytes remaining in memory and time that is displayed on the screen
- DXers—Now available for foreign TV formats (PAL System).

Designed by amateurs for amateurs. Routines in this program were originally developed in 1974 by Charles "Merlin" Myer (W8VCF) and recently updated to state of the art. There are over 100 functions in this program (too many to list here). A professional glass epoxy circuit board, plated through holes, and gold tabs. One-year warranty. If you don't think this is the finest RTTY/CW/T/U Interface and program on the market, return it within 30 days for full refund (less shipping), no questions asked! T/U plugs into user port, program cartridge plugs into expansion port. No hidden extras to buy. The only thing you need to supply is a microphone and audio connector to match your rig! Compare our price and specifications to units costing over \$500.00!

Newsome Electronics

19675 Allen Rd. • Trenton, Michigan 48183

(313) 479-2100

ORDER: CM-20 (for Vic-20) \$124.95
CM-64 (for C-64) \$124.95
CM-128/64 (for C-128) \$124.95
(add \$3.50 for shipping & handling
in the Continental U.S. \$7.00 for Overseas)
Mich. residents add 4% sales tax

v159

KePRO CIRCUIT MAKER

v155

For art supplies, kits and economical equipment to produce at home professional quality print circuit boards...ask for the pro's - Kepro Circuit Systems, Inc. Kepro has been producing prototype and short run equipment, as well as providing PCB supplies to industrial companies for years. Their specialized experience and knowledge provides the home hobbyist an economical and convenient source of equipment and supplies for a professional, one-of-a-kind, printed circuit board.

Shears, etchers, sensitized and non-sensitized copperclad laminates, art supplies, kits and Keproclad...all you need to make a professional quality printed circuit board at home and at a cost you can afford.

kepro

Kepro Circuit Systems, Inc.

Kepro, your one stop source for at home PCB's.

Write or call Kepro for their catalog and price list:
1-800-325-3878 or 1-314-343-1630 (MO)
630 Axminster Drive, Fenton, MO 63026-2992.




BENCHTOP
ETCHER




SHEAR
\$390.00

ART SUPPLIES

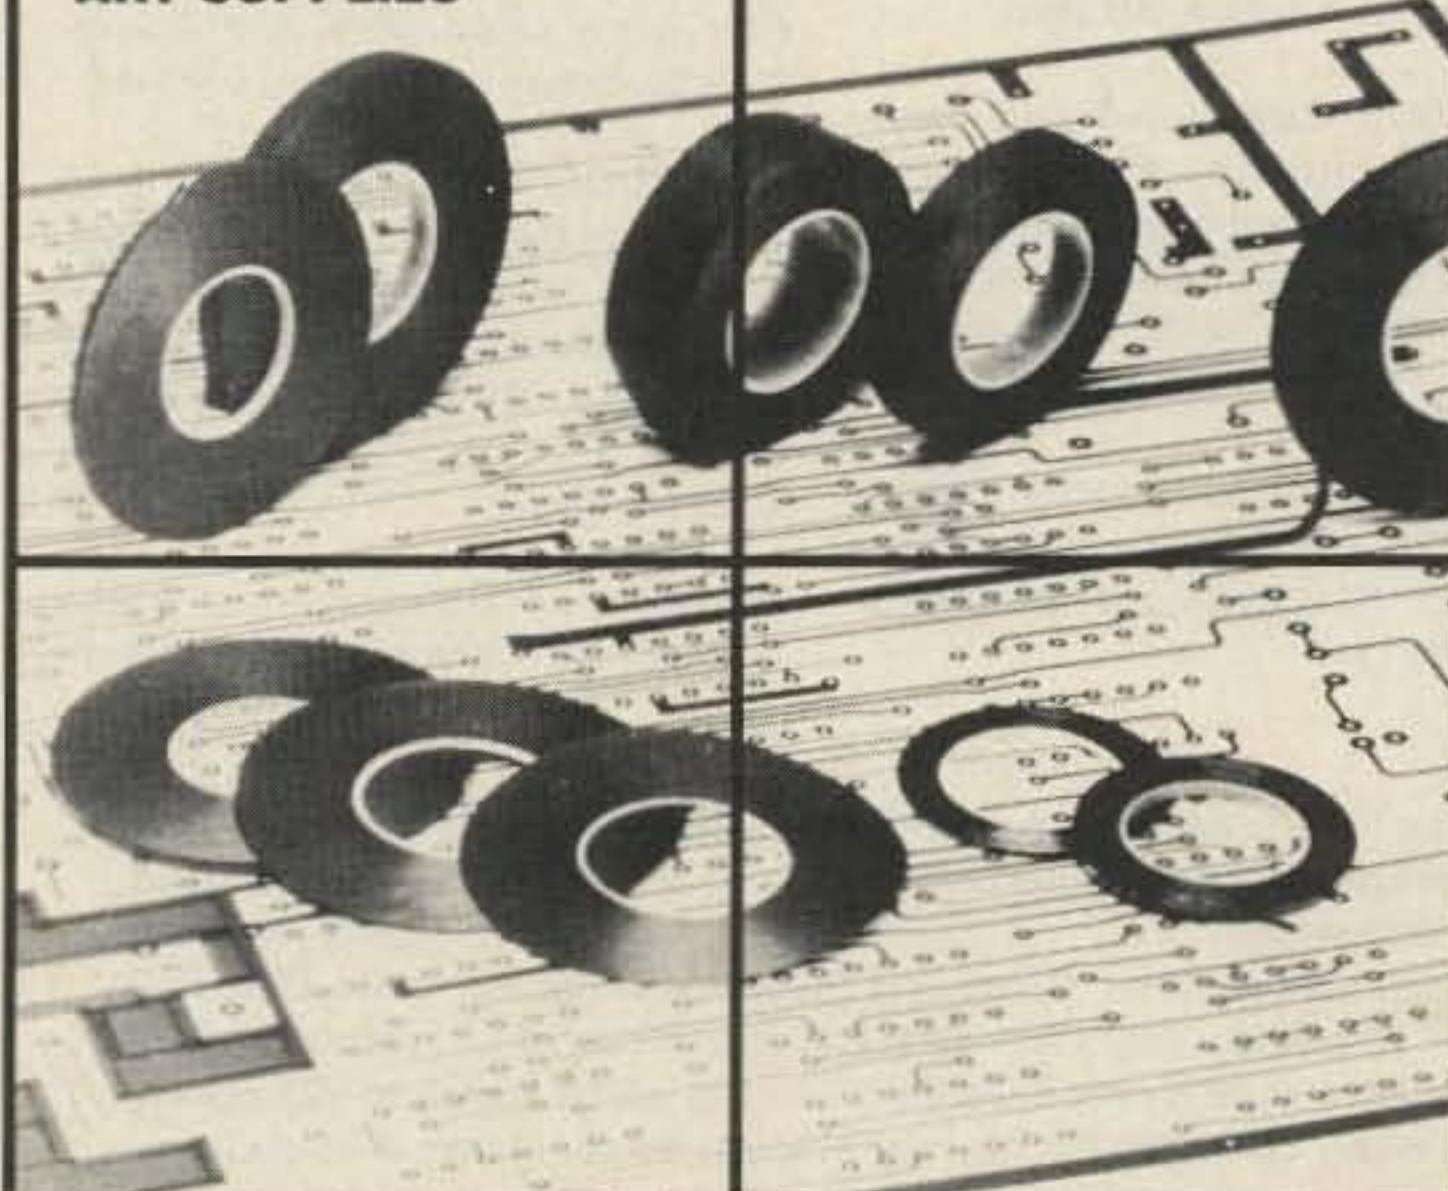


ART SUPPLIES

from \$2.79

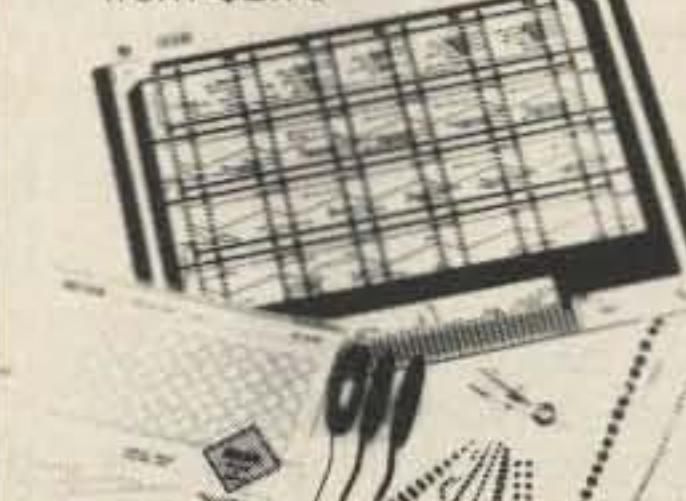

COPPER CLAD LAMINATES



Pre-cut copper clad
Bulk packaged copper clad
Full sheets
Plate-thru copper clad

BARTER 'N' BUY

Number 16 on your Feedback card

MILITARY TECHNICAL MANUALS
for old and obsolete equipment. 60-page catalog, \$3. Military Technical Manual Service, 2266 Senasac Ave., Long Beach CA 90815. BNB045

MARINE RADIO: Marconi Canada CH-125 synthesized AM/SSB transceiver, 22 channels on 4, 8, and 12 MHz, 125 Watts, 12 V dc. Never used, list \$1,995, asking \$1,495. Perry Donham KW1O, 70 Rte. 202 North, Peterborough NH 03458. BNB047

HAM RADIO REPAIR, tube through solid state. Robert Hall Electronics, PO Box 8363, San Francisco CA 94128; (408)-729-8200. BNB219

QSLs to order. Variety of styles, colors, card stock. W4BPD QSLs, PO Drawer DX, Cordova SC 29039. BNB260

THE DX'ERS MAGAZINE. Up-to-date, informative, interesting. Compiled and edited by Gus Browning W4BPD, DX-CC Honor Roll Certificate 2-4. Send for free sample and subscription information today. PO Drawer DX, Cordova SC 29039. BNB261

IMRA—International Mission Radio Association. Forty countries, 800 members. Assists missionaries with equipment loaned, weekday net, 14.280 MHz, 2-3 p.m. Eastern. Brother Bernard Frey, 1 Pryer Manor Road, Larchmont NY 10538. BNB326

ELECTRON TUBES: receiving, transmitting, microwave—all types available. Large inventory means next-day shipment in most cases. Daily Electronics, PO Box 5029, Compton CA 90224; (213)-774-1255. BNB330

RADIO TRANSCRIPTION DISCS WANTED. Any size, speed. W7FIZ—WG, Box 724, Redmond WA 98073-0724. BNB347

Barter 'N' Buy advertising must pertain to ham radio products or services.

Individual (noncommercial) 25¢ per word

Commercial 60¢ per word

Prepayment required. Count only the words in the text. Your address is free. 73 cannot verify advertising claims and cannot be held responsible for claims made by the advertiser. Liability will be limited to making any necessary corrections in the next available issue. Please print clearly or type (double-spaced).

No discounts or commissions are available. Copy must be received in Peterborough by the fifth of the second month preceding the cover date. Make checks payable to 73 Magazine and send to: Hope Currier, 73 Magazine, WGE Center, Peterborough NH 03458.

day nets. Medically oriented amateurs (physicians, dentists, veterinarians, nurses, physio-therapists, lab technicians, etc.) invited to join. Presently over 550 members. For information, write MARCO, Box 73's, Acme PA 15610. BNB441

YAESU OWNERS—Hundreds of modifications and improvements for your rig. Select the best from 14 years of genuine top-rated Fox-Tango Newsletters by using our new 32-page Cumulative Index. Only \$5 postpaid (cash or check) with \$4 rebate certificate creditable toward newsletter purchases. Includes famous Fox-Tango Filter and Accessories Lists. Milt Lowens N4ML (Editor), Box 15944, W. Palm Beach FL 33416; (305)-683-9587. BNB448

C-64 AND C-128 SOFTWARE: Send SASE for list. PO Box 387, Chillicothe OH 45601. BNB449

TOWER CLIMBING SAFETY BELTS and accessories. Free specs. Avatar Mag., 1147 N. Emerson #7, Indianapolis IN 46219-2929. BNB458

CB-TO-10 METERS: FM kits, frequency modification hardware, plans, books, high-performance accessories. Catalog \$2. CBCI, Box 31500A, Phoenix AZ 85046. BNB463

FIND OUT what else you can hear on your general-coverage transceiver or receiver. Join a shortwave radio listening club. Complete information on major North American clubs and sample newsletter \$1. Association of North American Radio Clubs, PO Box 462, Northfield MN 55057. BNB464

READ ALL ABOUT IT! This is the one you've heard about. The Comprehensive Guide to Unusual Online Services. The weird, tantalizing, and bizarre. The secrets. Find partners online. Find the invitation-only services and bulletin boards. \$24.95: Saunders and Pierce Publishing, PO Box 243, Dept. A, Flushing NY 11379. BNB466

"HAMLOG" COMPUTER programs. 17 modules auto-logs, sorts 7-band WAS/DXCC. Full-feature editing. Apple \$14.95, IBM or CP/M \$24.95. Much more. KA1AWH, PO Box 2015, Peabody MA 01960. BNB467

QUALITY ELECTRONICS SERVICING. HF and VHF repair. Restorations and mods. All makes. Contact Quality Electronics, 815 Hwy. 190, Mandeville LA 70448; (504)-626-5801. BNB471

CABLE TV CONVERTERS and accessories of every description. (Dealers wanted.) Catalog \$1. Crosley (L), Box 777, Champlain NY 12919. BNB473

IBM-PC CODE PRACTICE SOFTWARE, \$20. Write for details. Eric Lundstrom, PO Box 21654, Concord CA 94521. BNB474

IBM AND APPLE USERS. \$1 for latest listing of computer software and accessories direct from manufacturers. Pro-

grams, cabling, memory, and much more! Wentco, PO Box 81428, Cleveland OH 44181. BNB476

BUILD YOUR OWN SATELLITE DISH ANTENNA. Book provides pictures, illustrations, easy-to-follow instructions for 10.5-foot dish antenna. Also pertinent information for antennas with focal distance of .4, .45, and .5 is given for 10.5-, 20-, and 30-foot dishes. Send \$12 to Power Gain Systems, Dept. D, PO Box 2955, West Monroe LA 71291. BNB477

WANTED: Old Western Electric, RCA, Radiotron, McIntosh, Marantz, Dynaco, Telefunken, Tannoy, Altec—tubes, speakers, amplifiers. Maury Corp., 11122 Atwell, Houston TX 77096; (713)-728-4343. BNB479

FOR SALE: Kenwood 2-meter TR-7400 with built-in scanner; \$160. Drake TR22C 2-meter mobile/portable with linear amp; \$160. Wilson 2-meter hand-held with case/charger, immaculate; \$140. Complete Collins S line, 7553 receiver, 3251 transmitter and power supply; \$300. Nick Swan WB8ERN, 4839 Beaune Road, Ludington MI 49431; (616)-843-2162. BNB480

SCARA ANNUAL INDOOR FLEA MARKET. Date—Sunday, November 9, 1986. Time—Sellers, 7 a.m.; Buyers, 9 a.m. to 3 p.m. Place—North Haven Park and Recreation Center, North Haven, Connecticut. Price—Tables, \$10 in advance (first come, first served); \$15 at the door (if available); Buyers, \$2. For information or table reservations, send SASE and phone number to: SCARA Flea Market, PO Box 81, North Haven CT 06473. Reservations must be received by Nov. 3, 1986. For information ONLY, from 7 p.m. to 10 p.m., contact Brad at (203)-265-6478. NO RESERVATIONS WILL BE TAKEN BY PHONE. BNB481

HAPPY THANKSGIVING from all the little Pilgrims at Junior High School 22 on Manhattan's Lower East Side. Send us your QSL today and we may send you our QSL OF THE WEEK AWARD just in time for showing off around the holiday table. Mail today to WB2JKJ. BNB483

TOOLS FOR HAMS: solder, soldering irons, coax strippers, pliers, test equipment, and more. Send for product and price list to: Jarrand Electronics WB2DEQ, 39-32 Brookside Avenue, Fair Lawn NJ 07410. BNB485

MORSE CODE practice cartridge for the Commodore 64 or VIC-20. Variable speed. Characters with Morse equivalent displayed on screen for you. \$25 each. Call Jim at (318)-868-4233 or write to 331 East Southfield Road, Shreveport LA 71105. BNB486

ICOM IC-701 FOR SALE. Great condition in original boxes. Includes mic and manual. I'll even throw in a FaxScan Beeper III. \$440. Call Perry KW1O at (603)-525-4201 days, or at (603)-547-2706 evenings. BNB487

WEATHERSAT

Number 28 on your Feedback card

Dr. Ralph E. Taggart WB8DQT
602 S. Jefferson
Mason MI 48854

RECEIVERS

The first three months of this column, of which this is number two, have one feature in common—there has not yet been time for reader input as to what subjects you would like to see discussed! When reader input gets thin, or nonexistent in the case of the first three columns, I will fall back to the "safe" strategy of discussing something of general interest.

For this month, the subject will be receivers. I might have started with antenna systems, but in the case of the VHF frequencies where most people are going to get started, antennas are fairly noncritical, at least for starters. The *Weather Satellite Handbook* describes several options for VHF satellite antennas, and even small two-meter antennas (3–5 elements) can be pressed into service to snag your first pictures. What you cannot fudge on is the receiver. Unless it meets certain minimum requirements, you may hear the satellite with a strong and consistent signal but you will not be able to get a decent picture.

To understand this seeming paradox, it is necessary to understand some aspects of the rf formats employed in weather satellite transmissions of potential interest to amateurs. All of the weather satellite transmissions you are likely to be interested in are transmitted in an FM format. When you choose a suitable FM receiver, the three primary criteria are sensitivity (noise figure), frequency coverage, and bandwidth.

Sensitivity/Noise Figure

Sensitivity is not a problem, despite the fact that we want the lowest practical noise figure, since an outstanding preamplifier can be added to any receiver that meets our other requirements. Modern GaAsFET preamplifiers for two meters (144–148 MHz) are available off the shelf with noise figures below 1 dB. Many of these are available in weatherproof housings for mounting at the antenna (a very good idea to eliminate the problem of transmission line losses). Virtually all of these

can be retuned to cover the 137–138-MHz VHF satellite band, and many manufacturers will retune them for you when you place an order.

We will look at some available units in future columns, but the bottom line is that if you have a receiver that is suitable in other respects, noise figure/sensitivity can be brought up to any needed requirements very easily. Of course standard MOSFET and JFET preamps can be used as well. I would avoid bipolar preamps, as these have a tendency to overload, particularly in areas with a lot of rf crud.

Frequency Coverage

The frequency range of interest is fairly narrow, with all polar orbit transmissions confined to the 137–138-MHz range. U.S. TIROS/NOAA polar orbit transmissions are made on frequencies of 137.50 and 137.62 MHz. Each of the two operational spacecraft that are ideally in service at any one time will use one of these frequencies. NOAA-6, for example, uses 137.50, while NOAA-9 uses 137.62. Each has backup capability on the alternate frequency should a primary transmitter failure occur. Soviet METEOR/COSMOS weather satellite transmissions occur on a wider variety of frequencies.

In the past, 137.15 and 137.30 MHz were the two "prime" frequencies, and there still appears to be an operational METEOR spacecraft—and often more than one—on 137.30 MHz most of the time. In recent years 137.85 MHz has been used quite regularly, al-

though other "oddball" frequencies in this range are active on an occasional basis. Whether this is by design or due to transmitter control problems is uncertain. In any case, your receiver must cover 137.50 and 137.62; 137.30 and 137.85 are desirable options.

Reception of geostationary WEFAK transmissions on 1691 and 1694.5 MHz (the latter used only by the European METEOSAT) is usually accomplished by using a converter ahead of the basic VHF FM satellite receiver. LO injection for the converter is adjusted so that the desired signal comes out at one of the "standard" VHF satellite frequencies (usually 137.50 MHz).

Bandwidth

Bandwidth turns out to be one of the biggest hurdles to overcome since all of the various satellites use deviation values that are significantly higher than those employed for standard FM voice links. The biggest market for FM receivers, if we leave out FM broadcast and TV sound, is for various kinds of scanners operating in the police and public-service bands. These transmissions typically deviate a maximum of ± 7.5 kHz and the receivers are usually set up for 15-kHz bandwidth.

Unfortunately, if you tally up the values for signal deviation for a spacecraft such as the TIROS/NOAA series (± 18 kHz) and Doppler shift (± 3 kHz), you end up with a required bandwidth in excess of 40 kHz! A signal from one of the polar orbiters, received on a typical scanner with 15-kHz bandwidth, will be severely distorted and will not produce a usable signal. A straight carrier will sound fine, but a modulated signal is a mess. Although deviation levels are lower for the

Soviet METEOR polar orbiters and the geostationary GOES and METEOSAT spacecraft, their signals are still too wide for satisfactory reception with a stock 15-kHz-bandwidth receiver. You would face exactly the same problem if you put a converter on an old two-meter receiver!

Receiver bandwidth is typically set by one or more filters in the i-f chain. There is almost always a crystal or ceramic filter at the 10.7-MHz first i-f and there is often another, usually ceramic, at the 455-kHz second i-f. If the receiver employs a crystal or ceramic filter at 10.7 MHz, it can often be widened by simply adding an inexpensive 30-kHz crystal filter in place of the original. A cheap 30-kHz filter will have very wide skirts and you will end up with a receiver with sufficient bandwidth to do the job. In contrast, a good 30-kHz filter will have steep skirts and the receiver will still be too sharp for TIROS/NOAA service.

The *WSH* provides some advice on crystal filter selection. If the receiver also uses a 455-kHz ceramic filter, you may have a problem since wider ceramic filters at this i-f frequency are harder to come by. I have had good success in some instances by simply replacing the 455-kHz filter with a small coupling capacitor.

Receiver Selection

In selecting a receiver, either off the shelf or for modification, the bandwidth factor should be foremost in your mind. In the sections that follow, I will outline some general strategies for receiver selection and modification. You should consult the *WSH* for more detailed coverage, including the addresses of the various vendors that will be noted.

Commercial Satellite Receivers

Obviously, the simplest approach is to buy a receiver designed for satellite reception. Models are available from vendors such as METSAT Products and Vanguard Labs. The most inexpensive options are crystal-controlled, and the crystal investment is quite modest since you will rarely want more than about four frequencies, unless you want to search for experimental Soviet spacecraft.

Kits

Your most economical option is to build a receiver from a kit. The number of VHF FM receiver kits available is now quite limited, but

Date	01 November 1986	
Spacecraft	NOAA-6	NOAA-9
Orbit Number	38192	9714
Eq. Crossing Time (UTC)	0105.71	0106.21
Longitude Asc. Node (Deg. W.)	99.23	152.74
Nodal Period (Min.)	101.127	102.0638
Frequency (MHz)	137.50	137.62

These orbital parameters are projected two months in advance due to deadline considerations. Accumulated errors due to uncompensated orbital decay and other anomalies result in expectation of errors up to two minutes and possibly as many degrees in terms of the crossing data and possible small changes in the indicated period. Users requiring precision tracking data should rely on more current sources.

Table 1. TIROS/NOAA orbital predict data.

fortunately Hamtronics still has several models, one of which is specifically broadbanded for satellite use. Such receivers are typically crystal-controlled.

Converter/Communications Receiver

Another possibility, not often considered, is to use a converter ahead of a communications receiver equipped with an optional FM i-f. If the FM option will provide sufficient bandwidth or can be modified, this approach can be very effective. The receiver will be tunable, but the high accuracy of most HF receiver vfo's will not present a problem in monitoring a specific frequency. You could modify a standard two-meter converter working into a 10-meter i-f (add a new LO crystal and retune), or you could contact companies like Spectrum International and have them modify a converter for you. Again, double-check the FM bandwidth specs; if the receiver is too narrow, you will get a strong but unusable signal!

Scanners

Now we come to the subject of scanner receivers! These beasts come in three general configurations: first-generation crystal-controlled units, programmable units covering the public-service bands, and wide-coverage programmable units.

Before I discuss each category, a few general guidelines are in order. First, if you are going to buy a new unit, insist on seeing a schematic. In the case of the Radio Shack receivers, such a schematic is usually in the manual, although you may need a magnifying glass to read it. The purpose of this step is to look at where the filters are located in the circuit. If you buy a used scanner, see if you can get a Sams Photofact sheet on it from your local electronics distributor.

Try to stick with units that employ standard i-f frequencies (10.7 MHz and 455 kHz), as you will have more luck in locating replacement filters to widen the bandwidth. I personally would avoid receivers that use other i-f frequencies. Ideally, try to get the dealer to open the case for you. Most will not, but try anyway. This will give you a chance to assess the mechanical aspects of filter replacement.

Crystal-controlled scanners are by far the simplest to work with. Generally the board layouts are more open, making it easier to get

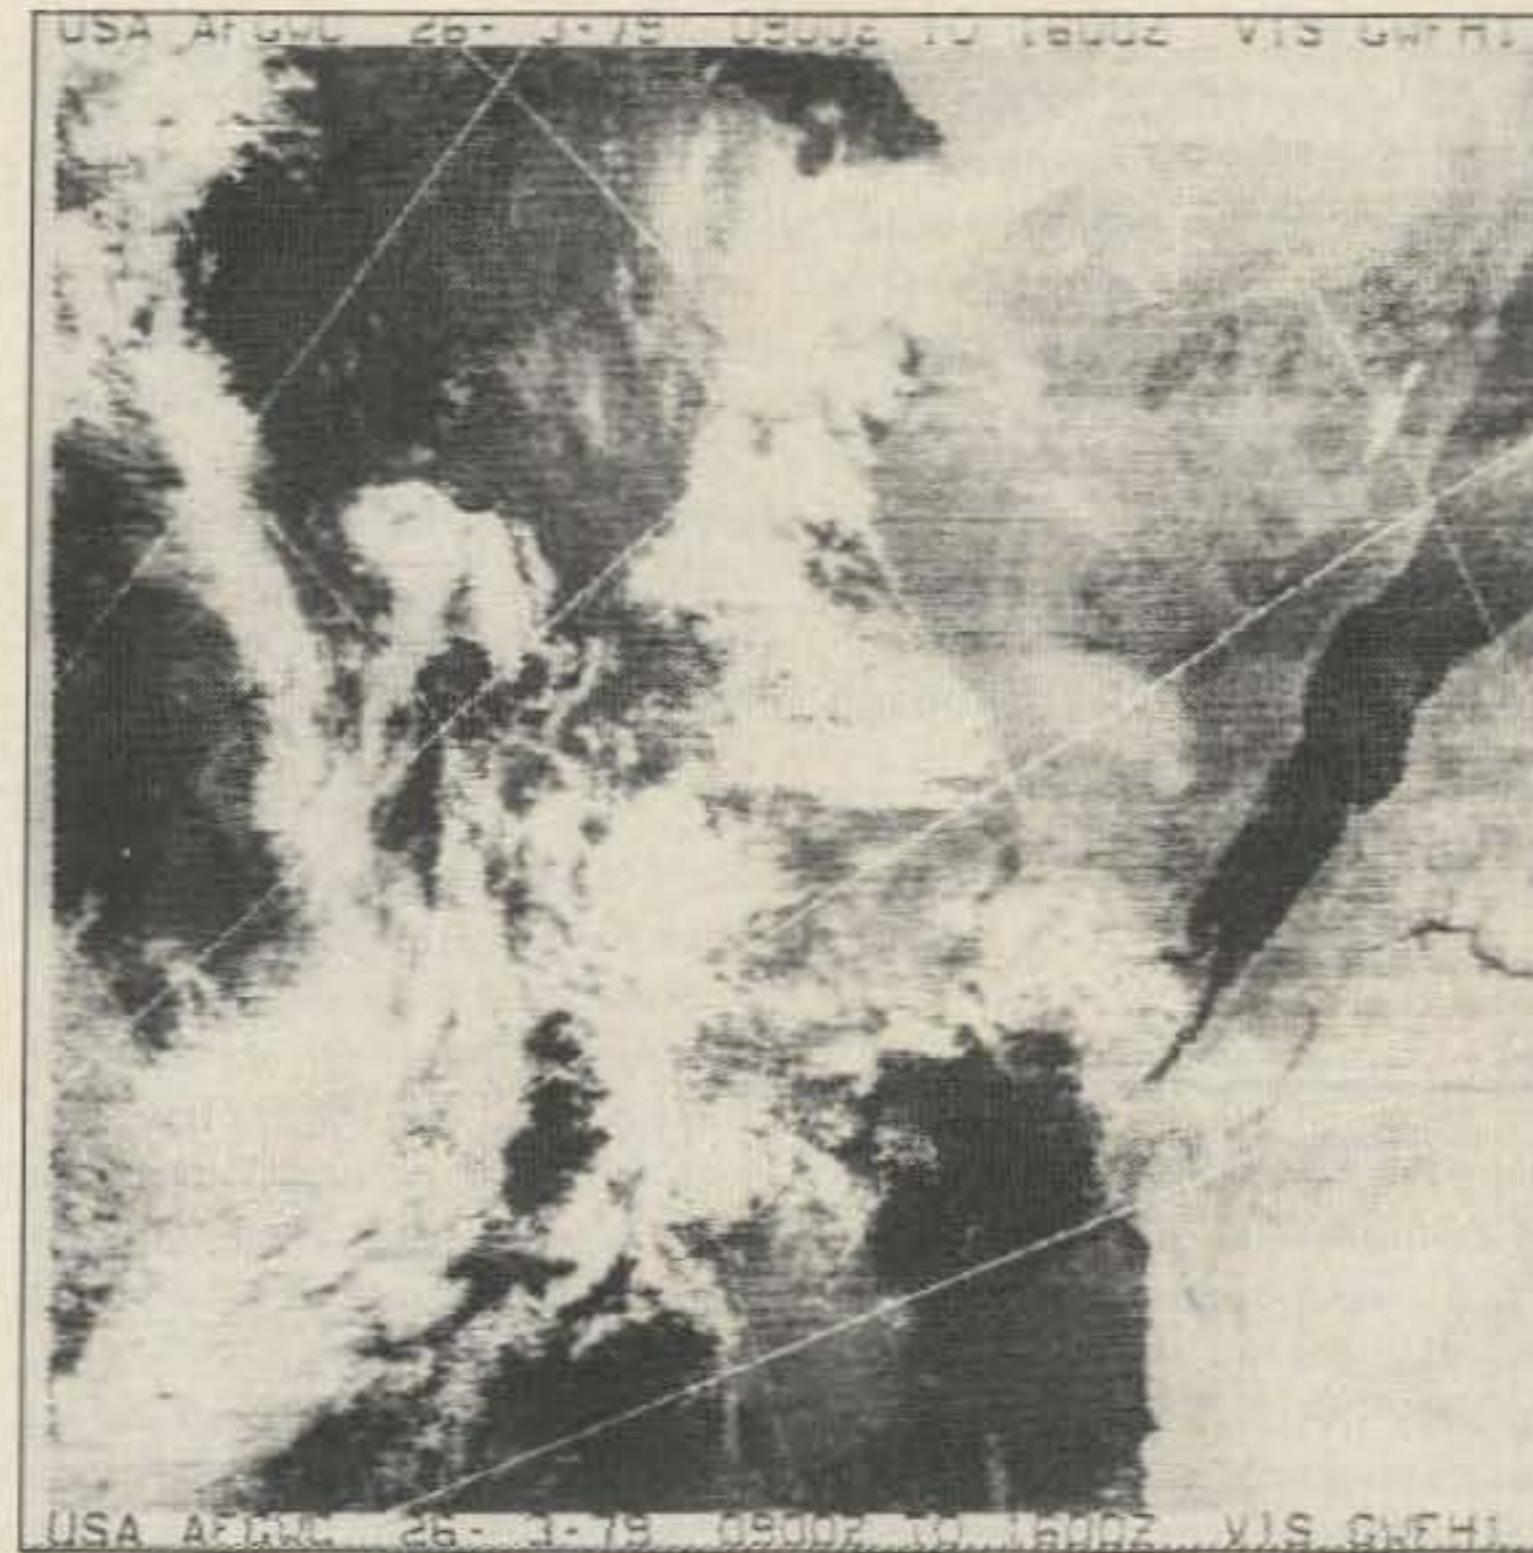


Photo A. Computer-formatted image of the Red Sea area, which was retransmitted through the GOES E spacecraft at 1691 MHz.

at the filters, and the VHF HI band (144–174 MHz) can usually be retuned to cover 137 MHz. Do not expect spectacular sensitivity since the front ends are designed for broadband service. But don't worry about it either since an external preamp will be needed in any case.

Programmable scanners designed strictly for public-service use present two problems. The first involves the tuning range. Most scanners are strictly limited to 144–174 MHz in the VHF HI range, and entering a 137-MHz satellite frequency will get you an error message of some sort. Two solutions are possible—setting the receiver on a frequency that provides high side injection for a satellite frequency and retuning the rf stages to peak at 137 MHz, or the use of a converter to convert the 137–138-MHz satellite band to a frequency range in the VHF LO band (usually 30–50 MHz).

The second problem, which concerns bandwidth, is preferred, but both options are described in the *WSH*. The PC boards of these receivers tend to be quite tight in layout, and actually getting at and replacing filters can be a problem. The degree of miniaturization makes it imperative to locate equally small replacement filters, and this can present difficulties. Here is where examining the circuit and looking into the unit can pay dividends prior to purchase!

The most impressive scanners

of all are the wide-coverage units that represent the new generation of scanning receivers. A unit like the Regency MX5000, for example, will tune directly from 25 to 550 MHz in 5-kHz steps, features programming of AM, narrowband FM, and wideband FM for any channel, and has 20 memory channels with all sorts of fancy search options. A receiver of this sort looks ideal since there are no tuning problems and the wideband FM mode, designed for TV sound and FM broadcast use, is certainly wide enough for the satellite signal. Unfortunately, the wideband mode is very wide, resulting in a severe degradation of the signal-to-noise ratio (S/N).

A GaAsFET preamp at the VHF antenna will usually minimize noise and maximize signal to the point where a receiver of this sort is useful for polar orbit service, but geostationary WEFAX use presents a problem. Even a GaAsFET preamp for 1691 is significantly noisier than a unit for 137 MHz, and the only solution for boosting the signal without introducing more receiver noise is higher antenna gain.

You will have relatively poor results in trying to use a small (1.2-meter/4-foot) dish with such a receiver even though it delivers a satisfactory signal when used with a 30–40-kHz-bandwidth receiver. The system will work if you use a GaAsFET preamp and a larger (3-meter/10-foot) antenna such as a

TVRO dish. But all of this adds to the expense of your system, not to mention the required antenna space. All such problems would disappear if the narrowband FM filters could be replaced with 30–40-kHz units, but the circuit board of a receiver like the MX5000 is packed to the limit with the smallest components you will see outside of an IC. I have no intention of attempting surgery on mine and I am usually quite casual about such modifications!

Receiver Modifications

Regardless of what approach you take to the station receiver, a few additional mods will be useful. The first concerns power supplies. A very well-regulated 12-V supply should be used. Scanner ac supplies almost always have an unacceptable hum level. You may not notice it on voice, but it will show up on pictures.

A second desirable modification is to provide a constant peak-amplitude audio tap from the receiver to your display system and tape recorder. This makes the video drive level independent of the receiver audio gain control and is quite handy. The easiest way to accomplish this is simply to tap off the top of the volume control (point furthest from ground) using a 0.1-uF disc or mylar capacitor, and then bring the line out to a phono jack at the rear of the receiver.

Trying It Out

Preliminary checks on the receiver can be made with a vertical quarter-wave antenna (51 cm/20 inches) connected directly to the antenna jack. With such a setup, you should be able to hear both TIROS/NOAA and Soviet METEOR spacecraft clearly during the best parts of a good pass. There will probably be considerable fading and noise, but you will hear the birds. For operational service, I would recommend the "Satellite Zapper" described in the *WSH*, preferably with a Vanguard Labs JFET preamp at the antenna or, better still, one of the newer GaAsFET units.

For the optimum in low-budget service, you can always clip a battery-operated receiver to your belt and hook up a 3–5 element two-meter beam. You can then stand in the backyard or on the roof and manually track the bird while piping the audio back to the station for recording. This approach is crude but extremely effective. You probably won't need a pre-

amp, given the fact that you have only a very short line to the antenna (a meter or so), and you can move the small antenna easily, rotating it to optimize polarization while monitoring the speaker or using a set of headphones. The neighbors will get a kick out of it, but it does work!

Picture of the Month

This little gem dates back to

March, 1979. A failure of one of the early TIROS/NOAA satellites left NESS depending upon an Air Force weather satellite for polar orbit coverage. This particular image was computer-formatted and retransmitted through the GOES E spacecraft at 1691 MHz. To get the correct geographic perspective (N to the top), you should rotate the picture 90° to the right, although

I will describe it as printed. The picture covers the eastern end of the Mediterranean. The Red Sea is very prominent on the right side, and the Nile River and Lake Nassar (behind the Aswan High Dam) are visible below it. One end of the Caspian Sea is visible at the top of the picture. The picture was printed on the facsimile recorder described in the *WSH*.

Next Month

Next month I will discuss some basic audio processing of the satellite signal from the receiver. This will be useful no matter what kind of display you will be using.

The *WSH* refers to the Third Edition of the *Weather Satellite Handbook*, available directly from the author for \$12.50 postpaid in the United States and Canada and \$14 elsewhere in the world. ■

FUN!

John Edwards KI2U
PO Box 73
Middle Village NY 11379

TVI TROUBLE

Ol' Benjamin Franklin has always been a sort of hero of mine. When Ben wasn't over in Paris teaching the local female nobility how to French kiss, he was back home in Philadelphia devising witticisms. One of Dr. Franklin's all-time best sayings is "Nothing is certain in life but death and taxes," or something like that.

Ben obviously wasn't a ham, for if he were an advocate of the wireless arts, he would have known that television interference (TVI) is also one of life's certainties. Ben was born before TV was invented, so I guess we can forgive him for the omission.

Over the years I suppose I've generated just about every sort of interference that can be inflicted on a boob tube. I take pride in running a clean station, but when you live in New York City and have dozens of television antennas within a cat's whisker of your tribander, TVI is just impossible to avoid. I've gone through dozens of low-pass filters, and have given away enough high-pass filters to propel one major manufacturer of such devices onto the Fortune 500.

One year, I even pulled a Santa Claus routine. I dressed up like St. Nick, got a big brown sack, and handed out high-pass filters to the neighbors as if they were peppermint canes.

"Ho, ho, ho, little boy. MERRY CHRISTMAS. Here's a high-pass filter."

"Geel Thanks, Santa. But I was hoping for an HW-101."

"Ho, ho, ho. Get lost, you little punk."

When the neighbors continued

Number 17 on your Feedback card

to complain about the interference I was causing, I thought I would wait until spring and dress up like the Easter Bunny. That way, I could carry additional filters from a beautifully decorated Easter basket. I thought better of the idea, however, figuring that two filters wouldn't be much more effective than one. Anyway, I don't look good in a bunny suit.

When I think about TVI, two stories immediately come to mind. The first is about the time I got a QSL card from a TV DXer in Dallas who said I was S9 +40 on channel 2 during a six-meter band opening. The more interesting story, however, concerns one of my first run-ins with an irate neighbor.

My TVI problems go back to the days before I was even a ham. In 1968 I was a CBer. In the golden days before CB hookers, 18-wheeled good buddies, and pinheads with affected southern drawls, the Citizens Band could be a lot of fun, even in a big city like New York. The bands were fairly empty, the chatter tended to be a lot more interesting than most ham QSOs, the equipment was cheap, and you didn't have to pass a code test. I was 14 and CB was a better way to BS with friends than to hang around the local candy store.

So, most evenings would find me in contact with my CB buddies, Morgan (Phantom), Jon (Willow), and Smitty, a mature 17-year-old who didn't need a CB handle and was sure his hypertension would let him beat the draft.

I was just telling Jon why I felt the "new" Nixon would beat the "old" Humphrey when my mother knocked. She opened my bedroom door a crack and said, "The neighbors are complaining again.

Mr. Madden says you're coming in on his TV. Tone it down."

Since "tone it down" was my mother's euphemism for "shut off the rig" and since the conversation was just getting interesting (Jon was an HHH man, Morgan favored Wallace, and Smitty was an anarchist), I became furious. As it was, I had de-peaked my rig to about 100 milliwatts and was occasionally wiped out by a pizza delivery service located in a neighboring county.

"Tell Mr. Madden I'm coming over to talk to him, Mom," I shouted through the door. Jon, who had experienced TVI problems of his own, volunteered to come over to give moral support.

"The two of us will be a TVI committee, just like they're always writing about in *QST*," said Jon.

This wasn't my first encounter with Mr. Madden. He was a tough customer whom I had faced before. What made talking to Mr. Madden all the more difficult was the fact that he was stinking drunk all of the time. I mean, really stinking drunk. You could smell the guy a mile away. You could ignite his breath, and his general body odor wasn't the most pleasant either.

There was another thing about Mr. Madden: He was red. Not just a red-neck (although it was) or a redhead (although he did have red hair). I mean the guy's skin color was red. Beet red. The sort of red that made you think his eyeballs were going to pop out at any minute and spatter you with blood. Weird. Drunk and weird and red.

Still, he was a neighbor, and the FCC and ARRL both agreed that you should treat your neighbors courteously. Only I never remembered seeing anyone like Mr. Madden in any ARRL training film.

So, about a half an hour later, Jon and I knocked on Mr. Madden's door.

"Whooz dere?" said a wobbly voice from the other side.

"John Edwards," I replied. "You complained that I was interfering with your television."

The door opened a little, closed a little, and opened a little further. Mr. Madden was having trouble mastering the intricacies of portal operation.

"Ohhhh yezzzz. You. You've been coming over acrozzz my teeveee," he managed to get out. Like a true drunk, it was taking some time for his brain to comprehend and act upon the situation. Eventually, however, he realized that I was the foe who was interfering with the broadcasts of "The Flintstones" and he got angry, very angry.

"Nowww youuu loook here," he stammered. "I've taken jussst about all I'm goin' to, youuu creep. Either you turn off that radio or I'mmm going to pop you."

Yipe! Fisticuffs! Being a devout coward, I pushed Jon in front of me.

"Say something, Jon," I said.

Jon, who had an uncanny knack of sizing up a situation instantly, said, "Sir, you are drunk."

Mr. Madden didn't say a word, he just hauled back and tried to push Jon's nose against his tonsils. Fortunately, since Mr. Madden was indeed drunk, he missed and splattered his knuckles into the door jamb.

Jon and I ran. We weren't going to wait for Mr. Madden to take a second swing.

Later that evening my father paid a visit to Mr. Madden. I don't remember if he took a shield, a suit of armor, or any hand grenades along. My father, however, was a British soldier during World War II and knew how to take care of himself.

"Son," said my father, "can that radio of yours transmit pictures?"

"No," I replied. "It doesn't make a very good helicopter, either. Why the stupid question?"

"Well, you see, when Mr. Madden claimed that you were com-

NEW!
DVK-100

Announcing The Digital Voice Keyer



Suggested Amateur
Net Price \$349.

• Microphone
not included

Now for the first time you can enjoy the truly unique operation of a Digital Voice Announcement System, designed specifically for Amateur Radio communications. The DVK-100 represents the latest technology in digital audio processing.

Create your own natural voice contest calls, CQ's etc. Your voice is stored in digital memory, ready to be played back at the touch of a key. The Digital Voice Keyer is not a tape recorder or robotic sounding synthesizer but a true full fidelity natural voice record/playback system.

The DVK-100, is a must for the avid contester and great audio accessory for any Ham Shack.

FEATURES

- Superior natural voice quality
- Micro-processor controlled
- 32 seconds of message time
- PTT/VOX operation
- Dynamic/condenser mic input
- Selectable monitor amplifier with preset level controls
- Selectable audio compressor
- Sealed membrane keyboard
- 4 independent voice memories
- Positive/negative keyed PIT
- ESD/EMI/RFI shielding
- Selectable end of transmission tone generator

The sound of the future is here today. Contact your local Amateur radio dealer or NEL-TECH LABS INC. for further information. Dealer Inquires Invited.



NEL-TECH LABS INC., 28 Devonshire Lane
Londonderry, NH 03053 (603) 434-8234

✓130

COMMERCIAL - AVIONICS - SOLID STATE - DIPOLE - LONG WIRE - MILITARY - MARINE

"THE AMERICAN ORIGINAL"

MADE IN AMERICA BY AMERICANS ✓101

MAXCOM



AUTOMATIC ANTENNA MATCHER ®

FOR ALL S.S.B. RADIOS


"ONE ANTENNA 100 KHZ. TO 200 MHZ."

MAXCOM has made Global Communications Simple!!!


TEN MODELS:

150 WATTS TO 10,000 WATTS
\$299. TO \$1,999.

VSWR 1.5:1 OR LESS



FIVE YEAR
GUARANTY
ON
MOST MODELS



MAXCOM

HIGH SPEED AUTOMATIC
ANTENNA MATCHER

200 WATT P.D.P.

2 m to 70 MHz

Absolutely no tuning with a MAXCOM system.
Simply connect, dial your frequency and talk...
That's it, just TALK.

OVER 3000 MAXCOM STATIONS WORLD WIDE
MAXCOM, INC. BOX 502, FT. LAUD., FL. 33302

305-527-5172 © 1986 Maxcom, Inc.

THE BOTTOM LINE: "MAXCOM WORKS"

✓153

Delaware Amateur Supply



Rob, WA3QLS



Paul, WA3QXP

71 Meadow Road, New Castle, Del. 19720

302-328-7728

Factory Authorized Dealer!

9-5 Daily, 9-8 Friday, 9-3 Saturday

KENWOOD YAESU ICOM TENTEC
MICROLOG KDK SANTEC KANTRONICS
AEA, AMERITRON, AND MUCH MORE!

Large Inventory, Daily UPS Service

800-441-7008

Katherine, KA3IYO

New Equipment Order & Pricing

Prices are subject to change without notice or
obligation. Products are not sold for evaluation.

NO Sales Tax in Delaware! one mile off I-95
SERVICE, USED GEAR INFO: 302-328-7728



ing in on his TV, he really meant coming in—picture and all. In fact, he said he's seen you on 'The Carol Burnett Show' and 'Gomer Pyle.'"

What do you say to something like that? My father knew what to say. "I told him to complain to the

FCC," my father reported. Good old fatherly common sense.

I don't know if Mr. Madden ever got around to writing his letter. The FCC never contacted me, and shortly after this unfortunate episode, Madden, his wife, and the two little Maddenettes moved

out in the middle of the night. We never heard from them again, thank heavens.

Which just leads me to think, were my nightly TV appearances merely the result of an alcohol-riden brain or were they a new, hitherto unreported type of TV? Or,

as Jon suggested, perhaps it had something to do with alien beings, UFOs, and the Bermuda Triangle.

Oh, well. I've always liked Rod Serling nearly as much as Ben Franklin. And, for some reason, my rig never interfered with the "Twilight Zone." ■

QRP

Number 24 on your Feedback card

Mike Bryce WB8VGE
2225 Mayflower NW
Massillon OH 44646

RULES OF TEN

"Hams never build anymore!" That seems to be the battle cry. Well, if it were not for the AMers, packet people, and us QRP types, it might be ham radio's swan song. That's not to say others don't build; it's just that these groups seem to be soldering up something all the time.

At the Dayton Hamvention, people stand in line just to buy parts. I just don't believe that all those parts will end up as plastic paperweights. So equipment building still has a very strong foothold in ham radio. But Dayton happens only once a year. How do you get all the small parts needed for your next project? Well, there are always more hamfests, but no guarantee that what you'll need will be available. So, what to do? Without a doubt, mail-ordering parts is the way of building in the 1980s. It's a buyer's market, but also, buyers beware! I have a system that I call "Mike's Rules of Ten."

Sometime around 1975, there was a ham radio store that was doing some very bad mail-order business. One magazine took it upon itself to call attention to the problem. That magazine was 73. There was a warning to new Novices seeking new equipment and, of course, to the parts buyers. What was the company? Trigger Electronics. Even with all the news about the dealings with Trigger, a lot of money was lost due to fraud. Yes, even I got bit, but using my Rules of Ten sure saved my money supply.

OK, just what are these rules of ten? Quite simply, this. When dealing for small parts with a new supplier, order only whatever is the minimum-order amount. This normally is about 10 bucks. When ordering small parts, like transistors, diodes, and the like, order in units of ten. This will save you

money—sometimes as much as 30 cents on each part. Then wait ten days (working days) for the order. Using this method, I lost only 10 dollars to Trigger. Yes, I, too, sent copies of my cancelled check to the infamous "Miss Dolly," and several phone calls later was still without my order. So I lost 10 bucks, but it could have been much worse.

Now that my Rules of Ten are common knowledge, what is the best mail-order house and what's the worst? Well, I'm going to stick my neck out on this one. I have made up a list of some of the people I have done business with. Since these are only my opinions, don't send hate mail to 73 but to me. Perhaps someone may have some bad tales to tell about one of the vendors that I like. Also, if you have had good service from a parts vendor, send me the company name and ordering requirements. I would like to expand the list. Meanwhile, here is what I have now, with each vendor rated on a one-to-ten scale, with ten being the best, of course. Again, these are only my opinions.

First on my list is All Electronics Corp. While they have several walk-in stores, all mail orders should go to PO Box 20406, Los

Angeles CA 90006. They have a 10-dollar minimum for orders and will take plastic money but no CODs. They sell surplus goodies, new small parts, wire, switches, etc. They have a fine catalog that's free; send for it. They also have very fast service, so they get a 7 on my scale.

Back in 1974, a vendor started to show up in this magazine. Its ad style is still copied today. At that time it was called "James Electronics." Today we know them as Jameco (1355 Shoreway Road, Belmont CA 94002). Primarily selling IC chips and computer parts and accessories, they have become THE source for components. While the minimum order is now 20 dollars, they do accept plastic money. A new catalog costs a buck. A top-rate vendor, they get a 10.

What Jameco is to ICs, Circuit Specialist Co. is to small rf parts. A free catalog may be had by writing to PO Box 3047, Scottsdale AZ 85257. Here is a QRP builder's dream come true. Aside from the usual offerings of transistors and IC chips, Circuit Specialist also offers a vast supply of rf chokes, chassis, PC-mount air-variable capacitors, and meters, just to name a few items. But perhaps the best news, there is no minimum order amount when a check or money order accompanies the order. Yes, they do take plastic money but then there is a 15-dol-

lar minimum. A super vendor, they get a 10.

I can't think where you might be located without one of these stores nearby—Radio Shack. They are one of the very few places left where you can walk in and get some parts. The only trouble is that they may have discontinued the part or simply are out of it. Their prices may be a bit out of line, but on a late Saturday night when you really need that one part to finish up your project, you'll pay the price. Get to know the people who work at your local Shack. They will sometimes alert you to possible advance sales on the parts. Given all of this, the old "Shack" gets a 5.

JDR Microdevices, 1224 S. Bascom Avenue, San Jose CA 95128, is a clone of Jameco. Not connected in any way, their ads look very similar. Computer parts, integrated circuits for the hobbyist, and those hard-to-find computer chips comprise the bulk of JDR's business. A 10-dollar minimum order is needed. Plastic money is also fine to use. They don't have a catalog proper, but advertise monthly in magazines. A very fine vendor, fast service, and friendly people, they rate a 9.

Mouser Electronics, 11433 Woodside Avenue, Santee CA 92071, reminds me of the old Allied Electronics. Their catalog looks very much the same, only smaller. They sell everything from soup to nuts. It's very unlikely that you can't find what you want in the catalog, which is free. While I think the prices are not the best, the quality is. On that remark, they get an 8.

There is one place many of us don't even bother to look: the old junk box. The photo shows a 40-meter transceiver I built from two sources—Radio Shack and the junk box. It sports vfo frequency control and has an output of about 12 Watts. (If enough interest is expressed, I will print up the plans.)

Looks like I'm about to run out of space. In my next column I'll look at some more parts vendors and discuss how to buy parts and keep a good stock of the most needed QRP goodies. ■



A QRP transceiver built with Radio Shack parts and a well-stocked junk box.



MK800 MEMORY KEYER

Physical Dimensions	Color	Power	Buffers
5.5x8x3	White Gray	120 volts AC Standard 12+15 volts DC Optional	6 99 Char.

Transmit Features

1. Floating Relay Contacts
 2. Full Break-In
 3. Straight Key Input will accept external keyer
 4. Built-in Iambic Keyer
 5. Continuously Variable Transmit Speed Control
 6. 15 Second Autotune/Key function
 7. Built-in Sidetone with volume and tone controls
 8. Link or Repeat messages 99 different times
 9. Auto-incrementing contact number, up to 9999
- Operational Features**
1. One Button SEND Operation
 2. Remote SEND Capable
 3. Insert/Delete Capability
 4. Pause
 5. Load/Standby
 6. Autospace While Loading
 7. Tune
- Miscellaneous Features**
1. Battery Backup for Buffers Batteries not included**
 2. External +12 volt power*
 3. Full 1 year parts and labor warranty

Price \$179.95

*\$9.95, +12 Volt option

**\$12.75, Factory Installed AA NICad Batteries

For Dealer Information Contact Us At:

✓140

Triangle Hobbies

3823 Guess Rd., Durham, NC 27705

(919) 471-8934

SSTV SOFTWARE

Introducing A New Dimension In SSTV

Gest VideoTools

- MS/DOS based advanced software package for 1200 c Robot users.
- Create/transmit your own high resolution graphic images.

Full Paint Package Features;

- 65K on screen colors out of a range of 256K
- ICOM-based menus, mouse-driven, easy to learn, easy to use
- Over 70 functions
- Enlarge, reduce, save, load video image and image fragments
- Combine video images, graphics and text
- Full image processing including noise reduction filters
- Save images, live off air
- Animation
- Zoom
- Full function robot control through software
- Auto I.D.

Now available to amateur market
Send check or money order, \$599
per system to:

Torontel Technology Systems Ltd.

174 Bellamy Rd. North
Scarborough, Ontario

Canada M1J 2L5

416-292-9952

✓114

SPECIALIZED COMMUNICATIONS FOR TODAY'S RADIO AMATEUR!

If you are ACTIVE in FSTV
SSTV, FAX, OSCAR, PACKET,
RTTY, EME, LASERS,
or COMPUTERS, then you need

"SPEC-COM!"

Published 10 Times

Per Year

By WB0QCD

(Serving Amateur Radio Since 1967!)

48 Pages per issue. Loaded with News, Articles, Projects, and Ads.

SIGN UP TODAY AND GET 3 BACK ISSUES "FREE"!

Join our growing membership at the regular \$20 per year rate and we will send you 3 back issues (of your choice) absolutely "free"! We also have 2 and 3 year discounts at just \$38 and \$56. Foreign surface and air mail subscriptions also available, please write for details. Add \$2.00 for a special 19-year "master article index" issue. Allow 2-3 weeks for your first issue. Special TRS-80C, Commodore 64, Apple, IBM Software Catalog Available!



THE SPEC-COM JOURNAL
P.O. BOX H,
LOWDEN, IOWA 52255



Credit Card Orders (5% added)

✓35

Iowa Residents Add 4% State Sales Tax

Measure Up With Coaxial Dynamics Model 83500 Digital Wattmeter

The "Generation Gap" is filled with the "new" EXPEDITOR, the microprocessor based R.F. AnaDigit System.

The EXPEDITOR power computer...you make the demands, it fills the requirements.

- Programmable forward AND reflected power ranges.
- Can be used with the elements you now have.
- Compatible with all Coaxial Dynamics line sizes and power ranges.
- 18 scales from 100 mW to 50 kW.

Contact us for your nearest authorized Coaxial Dynamics representative or distributor in our world-wide sales network.



COAXIAL DYNAMICS, INC.

15210 Industrial Parkway
Cleveland, Ohio 44135
216-267-2233 1-800-COAXIAL
Telex: 98-0630

Service and Dependability...A Part of Every Product



✓45

I'll do it! Send me the cards and quantities indicated below.

Style: W X Y
Please print your name and address exactly as it will appear on your cards:

Name _____	Address _____	City _____	State _____	Zip _____
Check _____	Amex _____	MC _____	VISA _____	Expires _____
# _____	Please allow 4 to 6 weeks for delivery			
73 Magazine, WGE Center, Peterborough NH 03458, Attn: QSL Orders 767600				

Please add \$1 postage & handling

Call _____


THEY'RE BACK




Style W



Style X

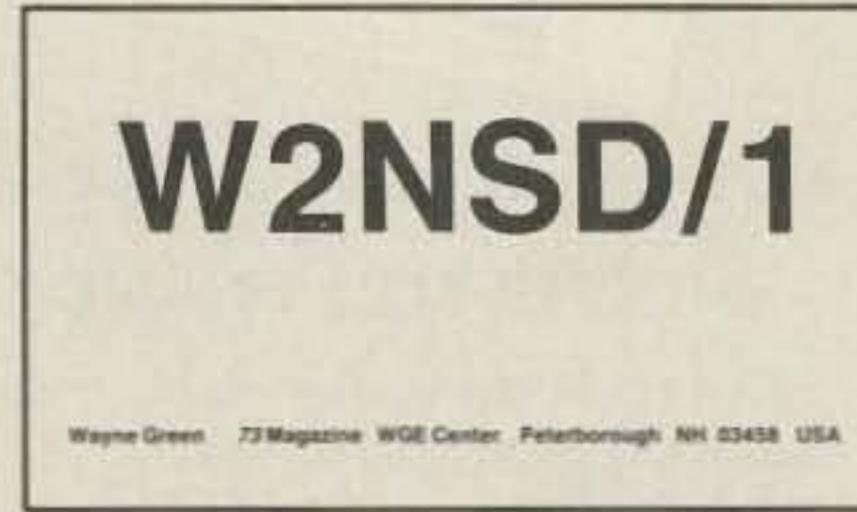

Style Y

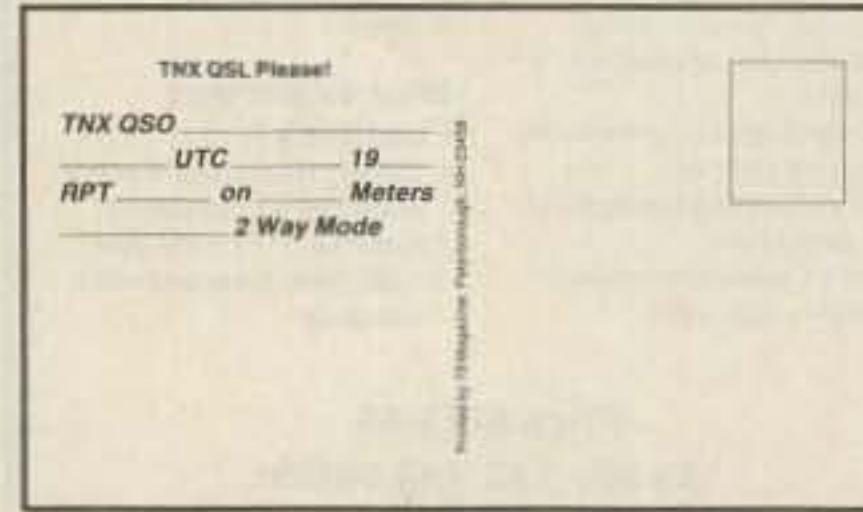

Reverse

The quality QSLs you've been looking for are here—at an incredibly low price! These cards are printed in two colors (blue globe or satellite, black type) on heavy, glossy stock. Now you can afford to QSL 100%!

• Order now before we regain our senses •

FEEDBACK

In our continuing effort to present the best in amateur radio features and columns, we've decided to go directly to the source—you, the reader. Articles and columns are assigned Feedback numbers, which appear on each article/column and are also listed below. These numbers correspond to those on the Feedback card opposite this page. On the card, please check the box which honestly represents your opinion of each article or column.

"What's in it for me?" comes the cry from our faithful readers. Besides the knowledge that you're helping us find out what you like (and don't like), we'll draw one Feedback card each month and award the lucky winner a free one-year subscription (or extension) to 73.

To save some money on stamps, why not fill out the Reader Service card, the Product Report card, and the Feedback card and put them in an envelope. Toss in a damning or praising letter to the editor while you're at it. You can also enter your QSL in our QSL of the Month contest. All for the low, low price of 22 cents!

Feedback #	Title	Feedback #	Title
1	A Power Supply Primer: Part I	15	ATV
2	Born-Again Bargain Boards	16	Barter 'N' Buy
3	Defuse RFI	17	Fun!
4	Commodore's RTTY Riot	18	Letters
5	Transistors On The Bias	19	Looking West
6	No Free Lunches	20	Never Say Die
7	Subaudible Snooping	21	New Products
8	A Pedal-Pushing Power Plant	22	NK6K > Packet
9	Holiday Buying Guide	23	Propagation
10	Pappy Linn K4PP Cartoons	24	QRP
11	Review: Mirage C22 A vs. Alinco ELH-220GF	25	QRX
12	Review: DSE 100-Watt VHF Amp	26	RTTY Loop
13	Review: Heath 2760 Battery Eliminator	27	73 International
14	Above and Beyond	28	WEATHERSAT

Congratulations to Glenn Carella N2GOP, this month's winner of a one-year subscription.

ADVERTISERS

R.S. #	page
65	AEA
1	Advanced Computer Controls, Inc.
143	Advanced Computer Controls, Inc.
105	Aero Electronics
*	Amateur Electronic Supply
111	Amp Supply Co.
64	Antek, Inc.
136	Antennas Etc.
116	Arnold Company
*	Associated Radio
16	Astron Corp.
*	Austin Amateur Radio Supply
158	Azimuth Communications
53	Barker & Williamson
41	Barry Electronics Corp.
42	Bilal Co.
9	Bill Ashby & Son
102	Brincom Technology
156	Buckmaster Publishing
*	CBC International
68	CES, Inc.
46	Charge-Rite
157	Cleveland Institute of Electronics
45	Coaxial Dynamics
134	Colorado Comm. Center
160	Com-Rad Industries
149	Com West Radio Systems
10	Communications Specialists
*	Computer Trader
12	Connect Systems, Inc.
153	Delaware Amateur Supply
161	Diamond Systems
*	Dick Smith Electronics
106	Digitrex
133	E&E, Inc.
137	Eli's Amateur Radio
*	Engineering Consulting
75	Fair Radio Sales
147	Fertiks
58	Fox-Tango
17	GLB Electronics
19	Hal-Tronix
20	Ham Radio Outlet
*	The Ham Station
*	Hamtronics, Inc.
*	Ham/West
94	Harrison Radio
108	Heil Ltd.
109	Heil Ltd.
110	Heil Ltd.
*	ICOM America, Inc.
100	Kantronics
*	Kenwood
155	Kepro Circuit Systems
126	The Lanz Company
23	Larsen Antennas
*	The Laser Press
*	LI DX Bulletin
24	MFJ Enterprises, Inc.
25	Madison Electronics
47	Maggiore Electronic Lab
101	Maxcom, Inc.
55	Meadowlake Corp.
162	Michigan Radio
26	Micro Control Specialties
70	Microlog Corp.
148	MindsEye Publications
120	Miracle Rod
91	Mirage/KLM
80	Missouri Radio Center
71	Monitoring Times
125	Mosley Electronics
127	Motron Electronics
151	Naval Electronics
130	Nel-Tech Labs, Inc.
50	Nemal Electronics
159	Newsome Electronics
139	Northeast Electronics
145	Oduro Enterprises
167	Orion Hi-Tech
96	Orlando Hamcation
28	P.C. Electronics
29	The PX Shack
152	Pac-Comm
107	Payne Radio
30	QEP's
31	Radio Amateur Callbook, Inc.
32	Radio Engineers
150	The Radio Works
*	Research Engineering
115	RF Connection
142	RF Enterprises
73	Moving
	QSLs
	Subscriptions
	Sweepstakes
73	S-F Amateur
*	Southern Software Systems
35	Spec-Com Journal
166	Spectronics
51	Spectrum Communications Corp.
131	Texas Magnetic Corp.
114	Torontel Technology
168	Transletronics
135	Transverters Unlimited
140	Triangle Hobbies
*	Tropical Hambooree
78	Unity Electronics
166	Van Gorden Engineering
79	Vanguard Labs
38	W9IIN Antennas
98	Watt Engineering
164	Wenzel Associates
68	Westcom/RF Parts
39	Western Electronics
163	Western Electronics
138	Westlink Report
154	World-Tech Products
40	Yaesu Electronics
165	Yaesu Electronics
	Cov. III

* Please correspond with this company directly.

There are two ways you can operate an amateur dual band UHF/VHF radio: you can go through the extra expense and bother of using two antennas... or, you can install the new Larsen 2/70—the single antenna that brings you both bands.

The Larsen 2/70 blends a half-wave element for 2-meter (144-148MHz) amateur band and collinear elements for 70cm (440-450MHz) amateur band. One antenna serves both bands, and is available with three different mounts for any mobile needs.

The self-resonant design of the Larsen 2/70 allows mast

applications for vessels and base stations outfitted with standard Larsen BSA-K hardware. With or without a ground plane, the Larsen 2/70 gives you the highest performance attainable, whether you are using a dual band radio or two separate radios.

If your radio does not have a built-in band splitter, we can even provide that.

Performance...savings...convenience...and a no-nonsense warranty—four great reasons for banding together with the Larsen 2/70. See your favorite amateur dealer or write for a free catalog today.

BAND TOGETHER



Larsen Antennas
The Amateur's Professional™

v23

See your favorite amateur dealer or write for a free amateur catalog.

IN USA: Larsen Electronics, Inc. / 11611 N.E. 50th Ave. / P.O. Box 1799 / Vancouver, WA 98668 / 206-573-2722
IN CANADA: Canadian Larsen Electronics, Ltd. / 149 West 6th Ave. / Vancouver, B.C. V5Y 1K3 / 604-872-8517

LARSEN®, KÜLROD® AND KÜLDUCKIE® ARE REGISTERED TRADEMARKS OF LARSEN ELECTRONICS, INC.

NK6K > PACKET

Number 22 on your Feedback card

Harold Price NK6K
1211 Ford Avenue
Redondo Beach CA 90278

Most of my previous packet columns have had some sort of theme, or at least they've been limited to one or two topics. This month, I'll dig into the bit bucket and pull out some short subjects, mostly in response to mail received here at NK6K.

First, the nocturnal habits of the West Coast *packeteerius rattus*. I'm a late-to-bed, late-to-rise type. I roll out of bed around 9 a.m. and sack out around 2 a.m., after "Late Night with David Letterman." I also work at home. Therefore, people who call me on the phone at 6:30 a.m. West Coast time hoping to "get me before I go to work" usually don't get a coherent answer to whatever question they might have had. Note also that there is a three-hour difference between Redondo Beach and the East Coast, not two.

Since I don't have a "company phone" to use, all returned phone calls cost real money. I return far more than I should, but I'm trying to cut down. To get the fastest, most coherent response to a question, send it to NK6K-2 via the packet-forwarding system. Unless I'm out of town, this usually gets a same-day response. People not yet on packet are welcome to use paper mail, but that's too easy to stack up and hide away, so a fast answer via paper is unusual. An SASE is always appreciated.

Portable Packet

Chip McCoy WB9OZX wrote in to ask about the portable packet system pictured on page 30 of the August issue. His question is "What additional software is required to use the TRS-80 Model 100 as a packet terminal?" The answer is "none." The Model 100 has a built-in terminal program called TELCOM. Most of the other lap-top computers have a similar program. For the Model 100, start the TELCOM program and enter the following command: STAT 5711E. Then say TERM. This should start you talking to the DB-25 serial port at 1200 baud.

Apple BBS

Jon WA2YVL asked about the N6BGW-9 BBS pictured in the

August issue. He's looking for a WØRLI-forwarding compatible system that will run on the Apple. Scott Avent N6BGW is running a system that was originally developed by Lynn Taylor WB6UUT. Scott has since added a WØRLI-forwarding receive mode and is working on a forwarding transmit mode. Other than this system, I am unaware of any other WØRLI-compatible system for the Apple. If you have one, please write in and let me know. WA2YVL will be moving to South Freeport, Maine, soon, so look for his BBS up there.

France

Remy Jentges F6ABJ sent in a short report on packet in France. He's been involved in promoting the AX.25 standard and in getting about 250 TNCs up and running. He's also working on getting a WA7MBL system up on VHF. They will have had a packet general assembly meeting in October; packet is showing good growth in France.

Flip-Flop

Earl Morris N8ERO writes to say that he has added another bell and whistle to the add-on connect beepers available from several sources. He's added a flip-flop to the connect light so that the LED stays lit after a connection has finished. This lets him know if anyone has connected, left a message, and disconnected while he was out of the room. He's also added a switch to pull the DTR line on the TNC serial port to ground when he's not around. This forces the TNC to hold on to any data received. Some users have had trouble in the past when they simply turn off their terminal, since the DTR line might float and not inhibit characters from "falling on the floor."

N8ERO also notes that a TNC can be connected directly to a modem, giving packet users access to the phone network, and phone users access to packet. This is an interesting experiment and has some useful applications, but care should be taken when connecting amateur frequencies to a non-amateur medium. If the possibility exists that an unlicensed individual can gain access to an amateur transmitter, a non-automated control operator must

be present. If you have implemented procedures, such as passwords, that ensure that the phone caller is licensed and is therefore able to operate your station as a control operator remotely via the phone line, you're in the clear. If you aren't sure of your security, it's best to disable that feature if you are not present and able to act as a control operator.

Note that once traffic that originated from a non-amateur has passed through that first non-automated control operator, it may be automatically repeated through the amateur digital network. This is discussed elsewhere in this column under the topic "Third-Party Traffic."

Newsletters

There are perhaps more packet radio newsletters in the land now than any other "specialty" group, and most other specialty newsletters and magazines include a packet column. This is because packet is still new and growing. If you've been on packet for a week you should have come to know more than 20 other new packeteers in your line of sight. Your local packet club and its newsletter can tell you more about how packet works in your area than a national magazine like this one can, so be sure to support your local group to get both parts of the story.

I'll continue to give you the big picture here. Several packet groups exchange newsletters; this is an excellent idea. I get a copy of several, and they're all very good. The only problem is a lack of steady input, which usually burns out the editor after a few months. I want to thank the crews at NAPRA's *Zero Retries*, the Packeteers of Long Island's *Poli Parrot*, and NEPRA's *PacketEar* for keeping me on the list.

Third-Party Traffic

I still get several queries a month on the topic of third-party traffic: "What is third party in relation to packet?" The most recent inquiry came from KM0M.

The best way to start the discussion is to look at the rule-making action in PR Docket 85-105. Also known as the automatic control docket, it gives complete and unambiguous permission to hams to run automated, unattended digital stations: when transmitting digital communications on frequencies above 50 MHz and while NOT sending third-party traffic.

As the result of several petitions

for reconsideration and a petition for Extraordinary Relief filed by the ARRL, the FCC partially (and temporarily) waived the third-party provisions of PR 85-105. That waiver said in part:

"(a) The provisions of Section 97.80(b) and 97.114(b)(4) are waived to permit amateur stations, retransmitting digital packet radio communications (see Section 97.69) on frequencies 50 MHz and above, using the AX.25 (or compatible) protocol, to be operated under automatic control while retransmitting third-party traffic. See Section 97.3(v)."

"(b) This waiver applies only to the retransmission of third-party traffic originated at another amateur station which is under local control or remote control. See Section 97.3(m)."

AX.25 is specified by name because it is the protocol in use by 99% or more of all U.S. hams and is therefore the most universally monitorable, and because each frame has a complete ASCII call-sign identifying the sender. The FCC wanted to make sure that, during the period of the waiver, hams could continue to:

"...ensure that amateur facilities and frequencies are not used by non-amateurs. Only a person who has demonstrated the proper qualifications may be a control operator of an amateur station. Such control operators screen any third-party traffic to prevent transmissions which are prohibited by Subpart E of the Amateur Rules.... Those prohibitions include, but are not limited to, business communications, secret messages, radiocommunications for unlawful purposes, and radiocommunication with nations which have not assented to third-party traffic."

What does all this mean? Ignoring international traffic for the moment, my interpretation is that third-party traffic may be sent by an amateur station under digital control above 50 MHz as long as the traffic was originated at a station with a live non-automated control operator. Obviously, any BBS messages to be automatically forwarded or packets to be automatically digipeated that are originated by a ham are permitted. Any messages to be automatically forwarded or packets to be automatically digipeated that started from non-hams are permitted as long as a ham is present at the station at which the messages are put into the network. That means that a Red Cross worker can type mes-

ANTECK, INC. H.F. MOBILE ANTENNAS

TWO MODELS AND A MARINE VERSION

MT-1RT REMOTE TUNED FROM THE OPERATOR'S POSITION (HYD)

MT-1 MANUAL TUNED

MT-1A MARINE, MANUAL TUNED

All feature 3.2 to 30 MHz coverage inclusive. 1500 watts P.E.P. for hams, military, MARS, CAP and commercial service. Full output from solid state finals, no heating to waste power. RT model can be remoted up to 500 feet from antenna. Send for free brochure.

See at your local dealer or order direct if none in your area.

MT-1RT Amateur Net \$309.95	\$12.00 UPS shipping
MT-1 Amateur Net \$169.95	\$10.00 UPS shipping
MT-1A Marine \$239.95	\$10.00 UPS shipping
MT-1RTR (Retro Kit for all MT-1 Series Antenna to convert to hyd. operated MT-1RT) \$169.95	\$9.00 UPS shipping

✓64 Route 1, Box 415M
ANTECK, INC. Hansen, Idaho 83334 208-423-4100



ASSOCIATED RADIO

8012 CONSER
OVERLAND PARK, KANSAS 66204

Call 913/381-5900



BUY — SELL — TRADE
ALL BRANDS NEW AND RECONDITIONED

WE'LL BUY YOUR EXTRA RIG
OR ENTIRE STATION

SEND \$2.00 FOR CATALOG & WHOLESALE LIST

SAVE AMERICA'S NO. 1 Real Amateur Radio Store



... at last ...
your shack organized!

A beautiful piece of furniture — your XYL will love it!

\$184.50 S-F RADIO DESK

Deluxe - Ready to Assemble

Designed with angled rear shelf for your viewing comfort and ease of operation.

FINISHES: Walnut or Teak Stain.

Floor Space: 39" Wide by 30" Deep

Additional Information on Request.

Checks, Money Orders, BankAmericard and Master Charge Accepted.


F.O.B. Culver City. (In Calif. Add 6% Sales Tax.)

DEALER INQUIRIES INVITED

S-F Amateur Radio Services

4384 KEYSTONE AVENUE • CULVER CITY, CALIF. 90230 — PHONE (213) 837-4870

PACKET RADIO

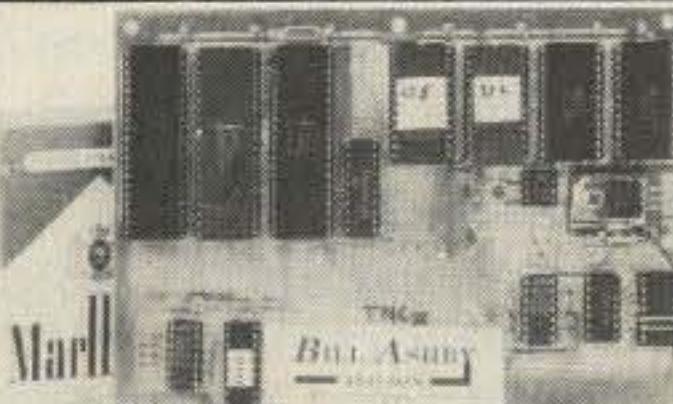

ASCII—USA/AX.25 HDLC CONVERTER

USA/AX.25 is the AMRAD approved digital format STANDARD used on amateur packet radio networks.

PAC/NET board only \$80.00
Assembled/Tested. No ICs. 90 day warranty

Package of all ICs except 2-2716
EPROMs \$80.00

PAC/NET SYSTEM

PAC/NET SYSTEM \$240.00

System Tested 4.5 x 6" board complete with all ICs and programmed EPROMs personalized for each purchaser. Requires only single 8-10 volt 1/2 amp power. 1 year guarantee of hardware/software/AX.25 standard RS232 serial ASCII at any user baud rate. RS232 HDLC for 202 modem used for AFSK or direct to RF equipment for FSK.

Custom Systems Custom Programming

BILL ASHBY

AND SON
K2TKN—KA2OEG 201-658-3087
BOX 332 PLUCKEMIN N.J. 07978

RF TRANSISTORS

2-30 MHz 12V (* = 28V)

P/N	Rating	Each	Match Pr.
MRF412/A	80W	18.00	45.00
MRF421	Q	100W	22.50
MRF422*		150W	38.00
MRF426/A*		25W	18.00
MRF433		12.5W	12.00
MRF449/A	Q	30W	12.50
MRF450/A	Q	50W	14.00
MRF453/A	Q	60W	15.00
MRF454/A	Q	80W	15.00
MRF455/A	Q	60W	12.00
MRF458		80W	20.00
MRF475		12W	3.00
MRF476		3W	2.75
MRF477		40W	11.00
MRF479		15W	10.00
MRF485*		15W	6.00
MRF492	Q	90W	16.75
SRF2072	Q	65W	13.00
SRF3662	Q	110W	25.00
SRF3775	Q	75W	14.00
SRF3795	Q	90W	16.50
CD2545		50W	23.00
3800	Q	100W	18.75
2SC2290		60W	19.75
2SC2879	Q	100W	25.00

Q = Selected High Gain Matched Quads Available

VHF/UHF TRANSISTORS

Rating	MHz	Net Ea.	Match Pr.
MRF222	25W	136-174	14.00
MRF224	40W	136-174	13.50
MRF237	4W	136-174	3.00
MRF238	30W	136-174	13.00
MRF239	30W	136-174	15.00
MRF240	40W	136-174	18.00
MRF245	80W	136-174	28.00
MRF247	75W	136-174	27.00
MRF607	1.75W	136-174	3.00
MRF641	15W	407-512	22.00
MRF644	25W	407-512	24.00
MRF646	40W	407-512	26.50
MRF648	60W	407-512	33.00
SD1441	150W	136-174	74.50
SD1447	100W	136-174	32.50
2N5591	25W	136-174	13.50
2N6080	4W	136-174	7.75
2N6081	15W	136-174	9.00
2N6082	25W	136-174	10.50
2N6083	30W	136-174	11.50
2N6084	40W	136-174	13.00

MISC. TRANSISTORS & MODULES

MRF134	\$16.00	MRF406	14.50
MRF136	21.00	MRF428	55.00
MRF136Y	70.00	MRF497	14.25
MRF137	24.00	MRF559	3.00
MRF138	35.00	2N1522	10.50
MRF140	89.50	2N3866	1.25
MRF150	89.50	2N4048	10.50
MRF172	62.00	2N4427	1.25
MRF174	80.00	2N5590	10.00
MRF208	11.50	2N5642	13.75
MRF209	22.50	2N5643	15.00
MRF212	16.00	2N5646	18.00
MRF221	10.00	2N5945	10.00
MRF260	7.00	2N5946	13.00
MRF261	9.00	2SC1969	3.00
MRF262	9.00	S10-12	13.50
MRF264	13.00	SAV6	34.50
NE41137	3.50	SAV7	34.50

Selected, matched finals for Icom, Atlas, Yaesu, KLM, Kenwood, Cubic, TWC, etc. Technical assistance and cross-reference on CD, PT, SD, SRF and 2SC P/Ns.

Quality parts users—call for quote

WE SHIP SAME DAY • C.O.D./VISA/MC

Minimum Order—Twenty Dollars

(619) 744-0728

✓69



RF PARTS

1320-16 Grand Avenue
San Marcos, CA 92069

sages into the keyboard of a packet terminal for transmission on the packet network as long as a ham is there to screen the messages. You may not turn your station over to that worker while you hike down to the food tent. You may, however, turn a computer over to a non-ham, who can then store messages on a disk while you are gone. When you return, you can screen the stored messages, and then dump them into a TNC.

The PR 85-105 docket, with waiver, is also clear about what you may not do. You may not:

- Run an unattended station below 50 MHz, no matter what the circumstances. It must have a control operator.
- Use the various digital rules and waivers above or below 50 MHz to send third-party traffic to foreign countries that do not permit such communications.

To summarize yet again and still ignoring international aspects:

1) Anything can be sent on packet above 50 MHz, automated or not, as long as a ham starts it into the network, either directly or as a control operator, and if that ham ensures compliance with all

other Part 97 rules regarding permitted and prohibited communications, primarily no secrets and no business.

2) You can't run a digital HF station unattended, no matter what kind of traffic you're sending. Sorry, but those are the rules.

Note that whether or not the messages are third party have been factored out of the above, so we can ignore the question of what is third-party traffic. As long as a live ham is present at the starting point, the rest of the stations in the network can forward the message without reviewing it. The FCC asks that, for the period of the waiver, we carefully monitor packet transmissions and report any abuse of an automated station to the control operator so he can take proper corrective action.

Now for the hard part, international packet. If you don't leave messages for anyone outside of North America or to areas where we haven't signed a third-party agreement, you may skip to the end of this section. Otherwise, we must define third party. Looking at Part 97.3(v), we see:

"Third-party traffic. Amateur radio communications by or under

the supervision of the control operator at an amateur radio station to another amateur radio station on behalf of anyone other than the control operator."

Let's look at an unambiguous case first: If NK6K is talking on 20 meters to G3YJO in England, that's legal. If an unlicensed friend of mine, standing in the room, wants to say "hello," that would be third party and not permitted. The friend's hello is not on my behalf, and therefore is not legal.

Now let's look at a tougher case. NK6K is talking to G3YJO through a satellite. At first glance, there are three parties involved, the control operator of NK6K, the control operator of G3YJO, and the control operator of the satellite. Fortunately, 97.417(c) exempts satellites from having control operators. In practice, amateur satellites are usually treated (when counting parties) as lumpy parts of the ionosphere. Therefore, the fact that you have relayed a message through a satellite does not make it "third party." A store-and-forward satellite would be treated in the same way.

Actual third-party traffic—e.g., if a friend wanted to say hello through my radio over the satellite—would still be illegal, unless a specific third-party agreement had been signed between the two countries involved.

We can define an even tougher case. Can a licensed ham send a message on VHF through several unattended digipeaters to a gateway, have it relayed via other VHF gateways to a satellite gateway, have it uplinked to a store-and-forward satellite, and then downlinked to a ham in a country that we don't have a third-party agreement with? Yes. The fact that it is going through a satellite can be ignored, since that does not turn traffic into third-party traffic. Going through automated digital stations does not make it third party. Thus ignoring the relay points, the question is then, is the communication on behalf of anyone other than the originating amateur station and the destination amateur station? In this example, it isn't, so it's OK.

There is one last case that is firmly in the middle of a gray area. What if, in the above example, one of the intermediate relay paths between the originator and the satellite gateway is on HF. Here we can't invoke the PR 85-105 waiver, since it doesn't apply below HF. All I can say is that

since the message started with, and on behalf of, a licensed amateur, and it will end up with a licensed amateur, and the intermediate points are simply an automated extension of the ionosphere, it ought to be OK. It is certainly not OK if the communication is not on the behalf of the control operators at the end points when the countries at the end points haven't signed a third-party agreement. As long as we keep that in mind, we're OK.

Bunk

I've been hearing a lot of talk lately that Wayne doesn't realize the value of packet radio. Well, that's a lot of hooey. On Friday at the September ARRL National Convention in San Diego, the August "all packet" issue of 73 was selling as a back issue for \$1. By Saturday, the August issue was selling as a current issue for \$3. That should show those rumor mongers. I also understand that Wayne (or a reasonable cardboard facsimile thereof) spent the night enthroned in the DRONK hospitality suite, but I'm still waiting for photo proof on that one.

Kids

I'm short of space here, as always, but I wanted to mention something that happened last weekend at the ARRL National Convention in San Diego. A Youth Forum was held, chaired by astronaut Dr. Tony England W0ORE. I was one of the panelists. There were about 150 kids aged 9–15 in the audience. During my pitch, I asked the kids how many of them had a computer at home. Every hand went up. Later in the forum, a mother asked what it would cost to get involved in amateur radio. I then asked how many kids had a disk drive on their computer. Most of the hands went up. I pointed out that the cost of the cheapest TNC and a swap meet, special 2-meter radio is less than the cost of that disk drive. Not all potential young hams fall into this category, but a great many do.

Keep this in mind when pitching amateur radio to the younger crowd. Get a computer into the demo somewhere; it will be a good point of reference for them. Beware, though, one of the little rug rats is likely to tell you something you didn't know about your own computer.

Next month (maybe), the first ever 73 packet poll. See you then. ■

UTILI-CASTING?



While some mergers result in funny names, the recent merger of **Monitoring Times** and **International Radio** (formerly the **Shortwave Guide**) has resulted in an excellent new 60-page magazine covering full-spectrum utilities communications as well as worldwide shortwave broadcasting activities. To keep it simple, we've retained the name of one of the two partner companies—**Monitoring Times**. It's all new, bigger, more colorful and more informative. Clearly, it's the most comprehensive publication for the radio listener available today!

v71

Send for a free "sample digest" or subscribe by contacting:

MONITORING TIMES


P.O. Box 98
Brasstown, N.C. 28902
704-837-9200

Rates: 1 Yr. \$14; 2 Yrs. \$25; 3 Yrs. \$36



CIE Cleveland Institute of Electronics

Accredited Member National Home Study Council

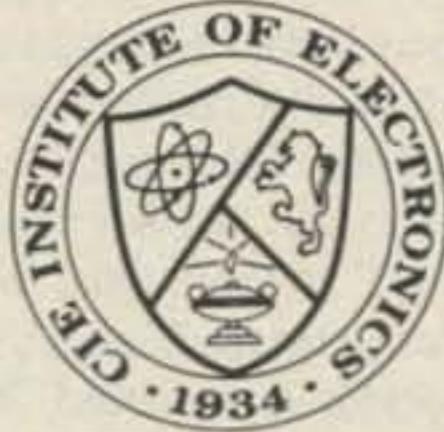

CIE is the world's largest independent study electronics school. We offer ten courses covering basic electronics to advanced digital and microprocessor technology. An Associate in Applied Science in Electronics Engineering Technology is also offered.

Study at home — no classes. Programs accredited and eligible for VA benefits.

CIE Cleveland Institute of Electronics
1776 East 17th St., Cleveland, Ohio 44114

YES! I want to get started. Send me my CIE school catalog including details about the Associate Degree program.

Print Name _____
Address _____ Apt. _____
City _____ State _____ Zip _____
Age _____ Area Code/Phone No. _____
Check box for G.I. Bulletin on Educational Benefits
 Veteran Active Duty MAIL TODAY!
AAR-73

✓157

ORDER TOLL FREE
1-800-233-2482
WE SHIP WORLDWIDE • HELPFUL PERSONAL SERVICE

WIRE & CABLE**ANTENNA WIRE**

Copperweld	0.12/ft	9913 low loss	0.42/ft
12 ga.		RG-213/U (8267)	0.40/ft
Copperweld	0.10/ft	RG-8/U (8237)	0.32/ft
14 ga.		RG-8/U (8214)	0.35/ft
Ladder line	0.10/ft	RG-8X (9258)	0.19/ft
450 ohm		RG-11/A/U (8261)	0.37/ft
		RG-59/U (8241)	0.14/ft
		RG-58/U (8259)	0.13/ft

ROTOR CABLE

Std: (6-22, 2-18) ... 0.19/ft
Hvy: (6-18, 2-16) ... 0.35/ft

COAX AVAILABLE IN PRECUT LENGTHS
WITH CONNECTORS ATTACHED
COAXIAL HARNESSES MADE TO YOUR SPECS

BELDEN COAX

QUANTITY DISCOUNTS
ON WIRE AND CABLE

Antennas & Towers by
UNR-ROHN, HY-GAIN, KLM, CUSHCRAFT,
BUTTERNUT, MOSLEY.


Prices subject to change without notice.
Minnesota residents add 6% tax.

Shipping additional except as noted.



Route No. 7
St. Cloud, Minnesota 56301
MN, AK, DX CALL (218) 765-3254 or (612) 255-0855

"When You Buy, Say 73"

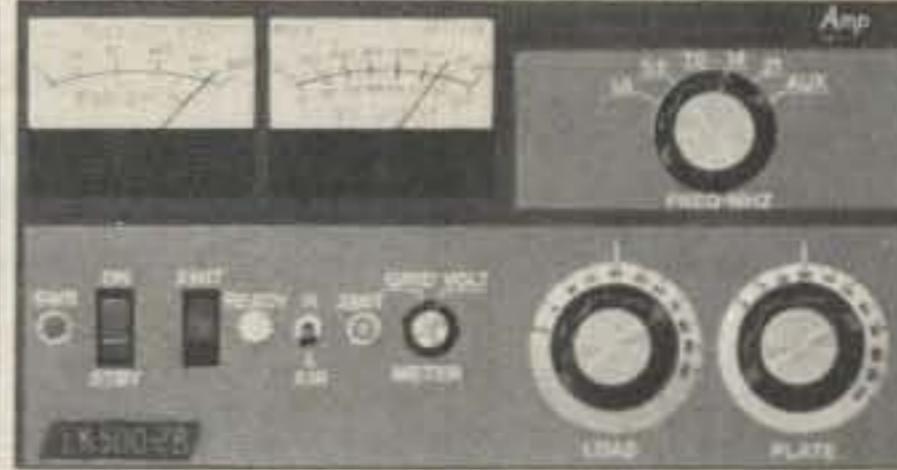**OUR CUSTOMERS TELL US
WHAT TO DO WITH OUR
PERFORMANCE AMPLIFIERS.**
**AND WE LISTEN****AUTOMATIC LOCK OUT**

One of the major problems facing amateur radio users has now been solved by Amp Supply Company engineers. Just released, our automatic lock out is a brain that senses both currents and voltage. It will stop amplifier operation when it senses an unacceptable SWR or improper tuning, and activate an amber warning light.

COMPATABILITY GUARANTEED

Customer feedback in 1986 insisted on system compatibility. Responding to this challenge, a special Plug and Play Harness to hook your favorite radio to the LK500 is offered as an accessory. Of course, all Amp Supply amplifiers have our famous ATI-6 tuned input system, assuring a perfect 50 ohm load to your transceiver.


THE LK500ZB MODEL

This self-contained, high frequency linear power amplifier is capable of amateur continuous operation at output power levels of 1500 watts. It is manually tunable from 1.8-2.4 and 3.5-22 MHz continuous, and equipped with an ITT Jennings vacuum antenna changeover relay and a companion sealed relay QSK system. The HF tank coil and Centralab bandswitch are silver-plated.

A version of the 500ZB without the Jennings vacuum antenna changeover relay is available. Order the LK500ZB without QSK for \$1199.00.



Amp Supply Co., 208 Snow Ave., P.O. Box 147 Raleigh, NC 27602
919/821-5818 Telex: 980131 WDMR

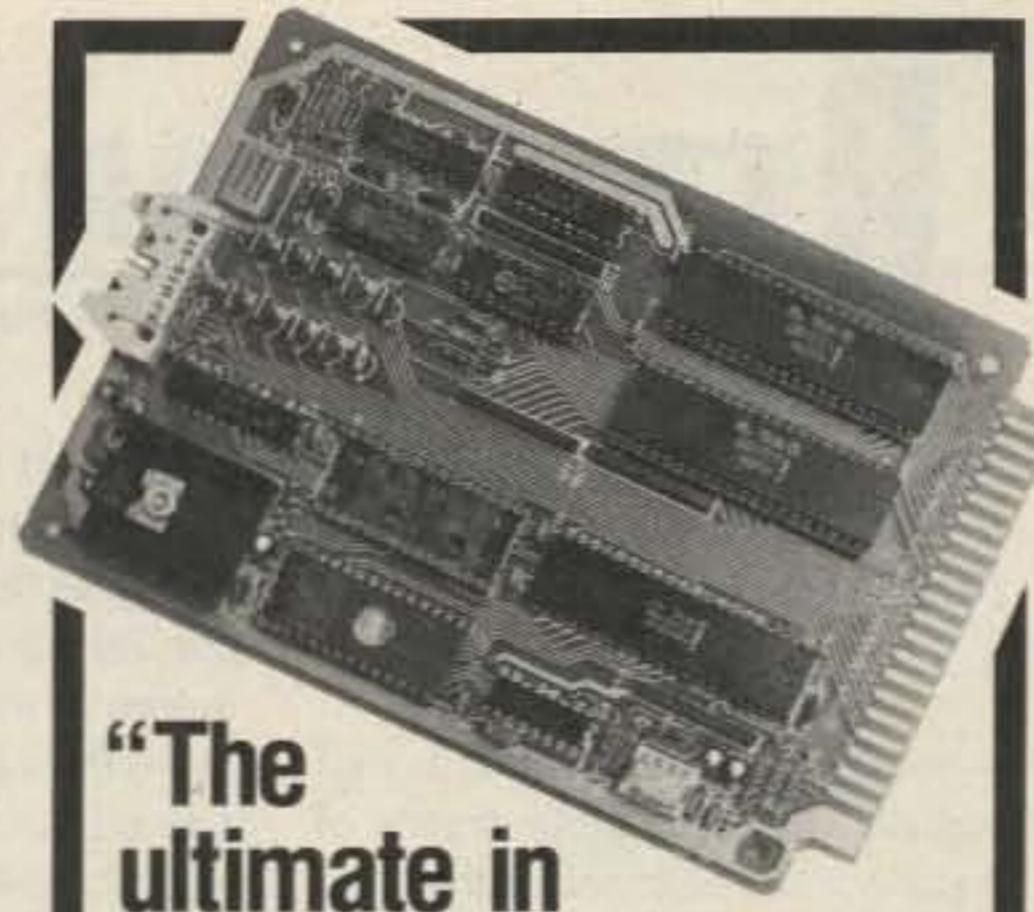
**"The
ultimate in
Touch-Tone control"**

The ITC-32 Intelligent Touch-Tone Control Board is the only decoder with the power of a built-in microcomputer. That means maximized capabilities at a competitive price. Features include 28 remotely controllable outputs, sense and alarm inputs, and command acknowledgement in Morse code. Plus basic repeater and remote base control functions, built-in.

Strengthen the foundation of your Touch-Tone remote control system. Don't settle for a "dumb" decoder, when for just a little more you can have the power of ACC working for you!

To order, use MasterCard/Visa or send \$275 plus \$7.50 for UPS air shipping. California residents add sales tax. Specify a command code prefix (between 1 and 7 digits), and a callsign if for repeater use. To order the manual only, just send \$10.00.


ACC

advanced computer controls, inc.

2356 Walsh Ave. • Santa Clara, CA 95051 (408) 727-3330

HI-Q BALUN

- For dipoles, yagis, inverted vees and doublets
- Replaces center insulator
- Puts power in antenna
- Broadbanded 3-40 MHz.
- Small, lightweight and weatherproof
- 1:1 Impedance ratio
- For full legal power and more
- Helps eliminate TVI
- With SO 239 connector
- Built-in DC ground helps protect against lightning

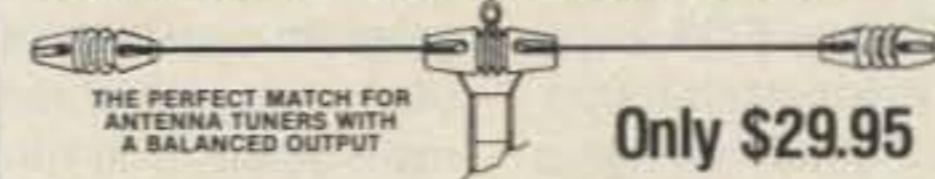**Only \$14.95****HI-Q ANTENNA CENTER INSULATOR****\$6.95****THE ALL-BANDER DIPOLE****Only \$29.95**

- Completely factory assembled ready to use
- Heavy 14 (7/22) gauge stranded copper antenna wire to survive those severe storms
- Center fed with 100 feet of low loss PVC covered 450 ohm balanced transmission line
- Includes center insulator with an eye hook for center support
- Includes custom molded insulators molded of top quality material with high dielectric qualities and excellent weatherability
- Complete installation instructions included
- Overall length 135 feet, less when erected as an inverted vee or sloper
- Handles 2 kW PEP & covers 160 through 10 meters
- May be trimmed to fit small city lots

Available at your favorite dealer or order direct from:
Van Gorden Engineering
P.O. Box 21305 • South Euclid, Ohio 44121
Dealer Inquiries Invited

A unique concept in a low profile antenna for radio communications...


Unitenna™ Hi-Rizer

A full-sized, 40 through 10 meter vertical, wound down to 15 inches in height to let you put it where you have to put it!

Continuously tunable from 7 to 30MHz for Amateur, Commercial, and Government Service.

**CR4010A**~~\$117.00~~sales tax where applicable.
VISA and MASTERCARD accepted.

purchase price includes antenna, feedline and mount of your choice. additional mounts are \$15.00 each (& \$2.00 shipping when ordered separately)

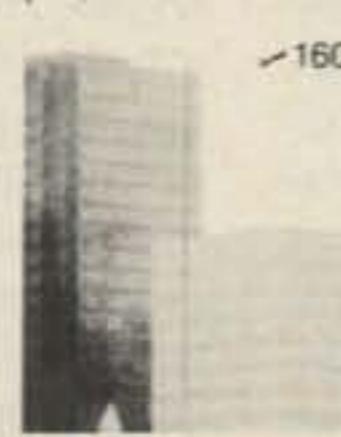Com-Rad Industries25 Imson St., Buffalo, NY 14210
(716) 823-0331 or (716) 773-1445

RTTY LOOP

Number 26 on your Feedback card

Marc I. Leavey, M.D. WA3AJR
6 Jenny Lane
Pikesville MD 21208

CoCo BONANZA

I am a bit confused this month because the honorable editor of 73 pulled an editorial string and shifted some dates around. However, if I read things right, this should be published in November, so a Happy Thanksgiving to you all.

In the last column, I promised some goodies for the rather vocal CoCo crowd, and I shall not let you down. By now, I assume most of you have heard about the CoCo 3. Just being announced as this column is being written, the Tandy Color Computer 3 promises to present a serious challenge to many of the newer computers on the market.

A look at some of the listed features should be enough to boggle the mind. How about 640 x 192 pixel graphics in four colors, or 340 x 192 pixel graphics in 16 colors from a palette of 64; or RAM expandable from a supplied 128K up to 512K; or a built-in 80-character by 24-line display; or television (rf), composite video, and RGB monitor outputs; or even the ability to run OS-9 Level II? And all this for less than \$240, according to my current sources! It sounds like quite a deal, and I for one can't wait to get my hands on one!

For those of us with current CoCos, however, the battle cry has been "give me a good RTTY program" for longer than I can remember. Well, folks, listen to this.

Ken E. Crowston VE5BBP, in Shellbrook, Saskatchewan, is the North American distributor for Grosvenor Software. This British line offers programs to put the Color Computer onto CW, RTTY, and AMTOR, and all for a rather modest price. Let me tell you a bit about the programs first.

The Morse program, BMKCW, functions as a full-service CW transceiver, kind of a glass Teletype™ for CW. The speed range, applicable to both sending and receiving, is from you've-got-to-be-kidding slow to about 200 wpm. Transmit speed is set up at the start and stays constant independent of received speed. Receive speed tracking is automatic and

can be set to respond to machine or hand-sent code. A sidetone is even available to listen to through the television speaker to aid in tuning or monitoring. Want more? More than 20K of received data is stored and can be reviewed. Push-to-talk is directly controlled from the keyboard. A transmit type-ahead buffer is maintained, with editing of characters possible before transmission. And, not to forget, the ability to save and retrieve pages of text to and from disk.

No great surprise, the RTTY program, BMKRTTY, looks and feels very similar to its sibling program. This is, however, a very well put together program. RTTY may be received through an external terminal unit or with the computer directly doing the decoding of received audio. The computer is programmed to handle standard 170-Hz, 425-Hz, and 850-Hz shifts, without the need for an external demodulator. Murray baud rates of 45 (amateur standard 60 wpm), as well as 50, 75, and 100 are supported. ASCII data exchange is also supported at 110, 300, and 1200 baud. Some systems may even handle 2400 baud, they tell me.

The rest of the features are enough to make your head spin! A split-screen, type-ahead buffer supports some 4,000 characters in the transmit buffer. About 19K of data, close to an hour's worth of transmission, can be stored and saved to disk. Unshift on space, or not; automatic CR/LF at the end of a line, with programmable line length; even a receive "standby" mode, which monitors for a valid RTTY signal—kind of like autostart—are all provided. Oh, and let's not forget built-in RY tests, and QUICK BROWN FOX keys, as well as a 31-character scratchpad memory to enter the other guy's name and call into.

Both the CW and RTTY programs include identification keys, by the way, which transmit your call on CW, RTTY, or both on command. Your call comes pre-programmed when you buy the program, and can be changed only by the dealer upon a nominal payment with suitable documentation. This is a novel method of copy protection, in that you are free to make as many copies as

you like, for your own use, but give one to a friend, and he is stuck with your ID!

The third member of this set is BMKAMTOR, an AMTOR transceive program for the Color Computer. By now, the features of this program should be fairly familiar. Split screen, user memories, disk save and recall, transmitter control, and other RTTY-like features are available. While this program does require a bit more hardware, including a 1-kHz external clock, the benefits to be gained are also a bit more. A 24-hour clock is displayed on the screen and is transmittable. Several modes of AMTOR transmission are supported, including FEC, ARQ, and listen to ARQ. And yes, CW identification is built in as well.

Now, as to the bottom line, I do hope you are sitting down for this. In Canadian dollars, the CW program sells for \$28, the RTTY program for \$28, and the AMTOR program for \$45. Remember, these are Canadian dollars, so a conversion will be required to U.S. dollars, and the prices do not include postage and handling. So why not drop Ken a line, at Crowston Enterprises, 307-111 Wedge Road, Saskatoon, Saskatchewan S7L 6S8, Canada, and ask for a catalog and price list. RTTY software has been scarce, so let Ken hear from you, and tell him that you read about it here in RTTY Loop!

Galfo Update

One of the things that never ceases to amaze me is the ability of you readers to come forth with information to help others. In what may be a continuing saga of Apple communications, the tale of the Galfo program goes on. Jim Marold WB2TZK/7J1ABK/KA2JM/NNN0IFL writes with his story of Apple programs. He says:

"The Galfo program is actually called HAM.M communications disk. In addition to the RTTY/CW program capability, it has several other programs included. The main point is it runs in Integer Basic. The old Apple II ran Integer Basic as a matter of course, but the II+ requires Integer Basic be loaded into the language (16K expansion card in slot 0). If that's not available, there is an Applesoft program that emulates Integer Basic. Run that prior to running an Integer Basic program; as long as there is enough room in memory for both programs, you're up and running. The program was written by Dr. C. H. Galfo. There

may also be a SSTV program on the disk.

"The program is certainly user friendly. On booting, it informs you of how much space is allocated to the receive and transmit buffers. This space can be shifted to put more in receive if desired. It then asks whether you want Morse, Baudot, or ASCII. If Baudot is selected, it then asks at what baud rate. The next question is word or character transmission, then the fill character (blank, LTRS, none). The program then goes into the receive mode with 2/3 of the screen for receive and 1/3 for transmit. There is a single status line with a tuning star. Calling various control keys allows putting either buffer on disk or getting a file from disk, changing speeds, changing modes, etc.

"The program handles machine CW very well compared to [another program I have used]. I monitor 10.415 MHz for Ursigrams (solar activity reports), which is machine-keyed at 20 wpm by JJD/JJD2 in Tokyo. The HAM.M program prints the CW as it's sent, and the wpm can vary without taking hits. If it drifts too far off, a simple Control-R puts it back on the chosen speed. The [other] program doesn't recognize the spaces in CW and runs everything together. When your data is five character number groups, reading [the other program's output] can get tedious. HAM.M looks at the game I/O port for a specific configuration. You must modify the software or your TU to match. [The other program] allows you to configure the software as part of the start-up procedure. Since I use a homemade TU, I had more problems getting [the other program] to look at the right pins than HAM.M."

I appreciate the information, Jim, and I am sure that the Apple users who frequent this corner of 73 second the thoughts.

Audience Participation

Have you noticed the "new look" of 73? For those of you who may have just arrived, the changes are under the auspices of Wayne Green W2NSD/1, who founded this magazine and serves as a driving force behind the vanguard of amateur radio. Among all the things the new 73 gives you, it asks for only one thing in return. In each issue of 73 is a Feedback card. Tear it out, fill it out, and send it in. All it will cost you is a stamp. Tell Wayne what

WE STOCK:

AEA, ALINCO, AMP SUPPLY CO., ARRL PUBLICATIONS, ASTRON, B & W, BENCHER, BUTTERNUT, CONNECT SYSTEMS, DIAWA, HEIL, HUSTLER, ICOM, KENPRO, KLM, LARSEN, MFJ, MINI PRODUCTS, MIRAGE, MOSLEY, NYE VIKING, SOMMER, SONY, TEN-TEC, TELEX HY-GAIN, TRYLYN, WSE DOCKING BOOSTER, YAESU.

Your Dollar will go further in Canada;
Call Today To See How Far!!

UPS SERVICE TO THE US MARKET

COM-WEST RADIO SYSTEMS
8179 Main Street
Vancouver, BC Canada V5X 3L2
(604) 321-1833

Credit Allowed For Toll Calls

✓149

MADISON

Electronics Supply, Inc.
3621 Fannin St. • Houston, Texas 77004

-25



BELDEN

BELDEN

9913 low loss, solid center conductor, foil & braid shield - excellent product	51¢/ft
8214 RG8 foam	45¢/ft
8237 RG8	39¢/ft
8267 RG213	55¢/ft
8262 RG-58 du milspec	18¢/ft
8000 14ga stranded copper ant. wire	13¢/ft
8448 8 conductor rotor cable	33¢/ft
9405 as above but HD-2-16ga, 6-18ga	56¢/ft
8403 Mic cable 3 condctr & shield	45¢/ft
100 feet 8214 wends installed	54.00
9258 RG-8X	20¢/ft

POLICIES—MASTERCARDS, VISA or C.O.D.

All prices FOB Houston, Texas, except as noted. Prices subject to change without notice, subject to prior sale. Used gear sale price refunded if not satisfied. Call anytime to check status of your order. Texas residents add sales tax.

FOR MORE INFORMATION CALL

outside Texas

1-800-231-3057

Texas and outside U.S.

1-713-520-7300

COM-SHACK 64 SIMPLEX OR DUPLEX SHACK CONTROL

AUTOPATCH * H.F. REMOTE * REPEATER CONTROL

- * C64 CONTROLS YOUR FT757 IC735 TS440/940 WITH YOUR H.T
- * CHOOSE EITHER SIMPLEX OR FULL DUPLEX CONTROL MODES!
- * ALL CONTROL FUNCTIONS ARE ACKNOWLEDGED WITH A CLEAR MALE VOICE!
- * VOICE CLOCK SET TIME FROM YOUR H.T
- * ALL USER PARAMETERS SAVED FOR FAST START-UP!

AUTOPATCH TONE OR PULSE, CALL WAITING, ANSWER SECOND INCOMING CALL, LAST NUMBER MEMORY, VOICEPAGE ON INCOMING CALL * AUTODIAL * REDIAL

H.F. REMOTE 9 MEMORY FREQUENCIES, SCAN UP, DOWN, FAST, SLOW * ENTER OR RECALL ANY FREQ FROM MEMORY * CHANGE MODES USB/LSB/FM/AM CONTROL 8 RELAYS (CS8 OPTION) ON/OFF WITH VOICE CONFIRMATION * NEW 100 Hz SINGLE STEP TUNE MODE!

SIMPLEX MODE (1 UHF OR UHF TRANSCEIVER) MENU SETS UP ALL TIMING WINDOWS, TIME BETWEEN WINDOWS, TIMERS, ACCESS CODES, CALL SIGN * LISTENS FOR CLEAR FREQ BEFORE TRANSMITTING

DUPLEX MODE & REPEATER CONTROL REPEATER * H.F. REMOTE * AUTOPATCH

ALL ABOVE FEATURES PLUS REPEATER CONTROLLER WITH HANG TIME, COURTESY BEEP, REPEATER ON/OFF, ACCESS CODES AUTOMATIC VOICE ID, ALL TIMERS SET FROM START-UP MENU * VARIOUS 2700 UHF/UHF MAKES INSTANT CROSSBAND REPEATER NO DUPLEXER REQUIRED DUPLEX OR SIMPLEX CONTROL

MODEL CS64 \$219.95 PLUS 3.00 S/H USA & CANADA

INC SOFTWARE DISK-HARDWARE-CABLES-MANUAL OPTIONAL CMOS AUTOLOAD CARTRIDGE FOR HILLTOP USE MODEL CS64R/CART \$99.95

USB/LSB KIT FOR FT757 MODEL CSR54 \$29.95

CS-8 LATCH CONTROL OPTION TURNS UP TO EIGHT DEVICES ON AND OFF WITH VOICE CONFIRMATION WHEN IN THE H.F. REMOTE MODE * 3 DPDT 2 AMP RELAYS INCLUDED & 5 MORE OPEN COLLECTOR 100mA OUTPUTS * PLUGS INTO JOYSTICK PORT * INC 24 PIN CONN

MODEL CS-8 \$79.95 USE WITH CS64

TWO METER REMOTE CONTROL "REMOTE-A-PAD" ROW-COLUMN KEYPAD CONTROL PLUS 2 FOUR DIGIT SEQUENCE DECODERS (TSD) * USE THIS BOARD TO CONTROL ANY 16 DIGIT KEYPAD REMOTELY WITH DTMF * SIMPLY HOOK 4 ROWS & 4 COLUMNS FROM YOUR KEYPAD YOU WISH TO CONTROL TO THE RAP-1 * UNLEASH THE POWER OF YOUR RIG'S MICROCOMPUTER * SCAN, ENTER FREQUENCIES TURN YOUR LINKS ON & OFF CONTROL KENWOOD 2500/7950 & MORE ADD 2MTR REMOTE TO CS64

MODEL RAP-1 \$149.95

ENGINEERING CONSULTING CO. CS64
583 CANDLEWOOD ST.
BREA, CA 92621
TEL 714-671-2009

() MODEL () \$	14 280MHZ N16R
() MODEL () \$	TOTAL \$
NAME	TEL ()
ADDR	CALL
CITY	STATE ZIP
MC/VISA #	EXP

NO FILTERS! NO FALSING!

TOUCHTONE DECODER KIT

- *SSI 201 DTMF RECEIVER KIT
- *RECEIVE ALL 16 DTMF DIGITS
- *NO ADDITIONAL FILTERING
- *OUTPUT BCD OR HEX FORMAT
- *LOW POWER DRAIN (29mA/12V)

KIT INCLUDES 3.58 MHZ XTAL 22 PIN IC SOCKET, RESISTOR, CAPACITORS, DATA SHEET SCHEMATICS, EASY TO BUILD

MODEL TTK \$22.95

4 DIGIT SEQUENCE DECODER (ON/OFF)

WIRED AND TESTED, 5 TO 12V
USER PROGRAMMABLE 50,000 COMBINATIONS ANY 16 DTMF TONES * SEND CODE ONCE TO TURN ON, AGAIN TO TURN OFF * MOMENTARY AND LATCHING OPEN COLLECTOR TRANSISTOR OUTPUTS * CUSTOM IC ASSURES HIGH RELIABILITY LED DECODE INDICATOR * INSTRUCTIONS & SCHEMATIC USE AS REPEATER ON/OFF

MODEL TSD \$59.95

DECODE-A-PAD

DTMF 5/12VDC AUDIO RS232 12*AB 6789#

DTMF TO RS-232 300 BAUD INTERFACE

USE YOUR COMPUTER TO DECODE DTMF TOUCHTONES * RECEIVE ALL 16 DIGITS AS FAST AS THEY CAN BE TRANSMITTED * EASILY PROGRAM YOUR COMPUTER IN BASIC TO DECODE MULTIDIGIT "STRINGS", DISPLAY DIGITS, SOUND ALARMS, OBSERVE SECRET CODES * SIMPLE TO INSTALL, HOOK 12 VDC, AUDIO & TWO WIRES TO YOUR COMPUTER -- ENTER A SIMPLE BASIC PROGRAM (PROVIDED) AND BEGIN TO DECODE * INCLUDES DATA LED, WIRED AND TESTED

MODEL DAP \$89.95

ICOM IC-02AT USER'S "AUDIO BLASTER"

MODULE INSTALLS INSIDE THE RADIO IN 10 MIN BOOST AUDIO TO NEARLY ONE WATT! * LOW POWER DRAIN (4mA STAND-BY) * COMPLETE INSTALLATION INSTRUCTIONS INCLUDED * CORRECTS THE LOW AUDIO PROBLEM * 1000'S OF SATISFIED CUSTOMERS! FOR IC02AT/IC04AT/IC2AT

MODEL AB1 \$19.95

NOW THAT'S LOUD NOW!


CREATE

Creative Design Co., Ltd.

ROOF TOWERS!

A size to fit your needs
6, 10, or 15 ft.

10 FT
CR-30
ILLUST.

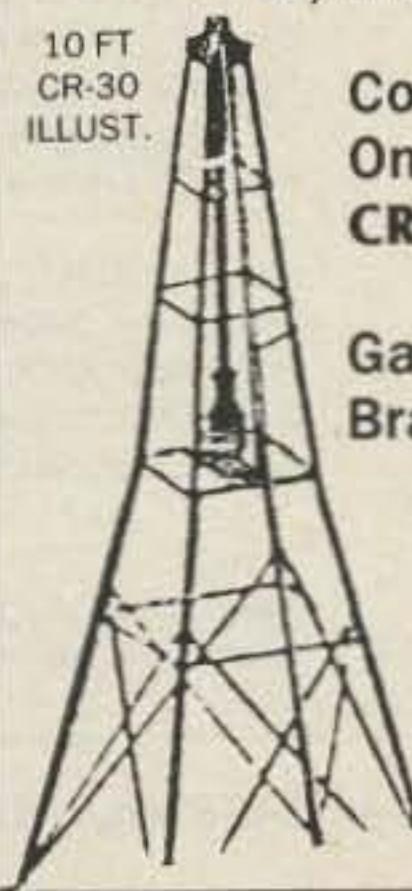

Competitively Priced
Only from your
CREATE dealer

Galvanized Steel
Bracing and Hardware

Dist. by
ORION HI-TECH
P.O. Box 8771,
Calabasas, CA.
91302

UPGRADE AMATEUR RADIO LICENSE

Let your computer test you before the license examination. FCC Amateur License Pool Questions. Complete multiple choice answers. Computer generated questions. Keeps running score (percentage) so you know how well you are doing. User friendly. For IBM PC/XT/AT and PC "look alikes" using DOS 2.1+ also Apple II+, IIe, & IIc having 128K of memory using ProDOS or Apple DOS 3.3.

NOVICE---\$24.95

TECH/GENERAL---\$34.95

ADVANCE---\$34.95

EXTRA---\$34.95

Each Sold Separately. Add \$1.50 for shipping & handling. Phone orders - Visa/MC. Illinois residents add 7% sales tax.

DIAMOND SYSTEMS, INC.
Box 48301 NILES, IL 60648 (312)763-1722

you think of the various articles and columns (RTTY Loop is "Great," right?), add your comments, and send it in. The staff assures me that the cards are read and that their content does make a difference. And, you stand to win a year's worth of 73 if

your card is pulled from the hat! Go ahead, do it now; I'll wait right here.

Are you back? Thanks. Now, remember that if you want to ask me a question, you can drop me a line at the address at the top of this column or send me E-mail on ei-

ther CompuServe, using ppn 75036,2501, or Delphi, using username MARCWA3AJR. If you want a copy of the list of reprints or a personal answer in the mail, be sure to include a self-addressed, stamped envelope for Postal Service inquiries.

I have a stack of mail here to go through for next month. They tell me that contesting is the theme. Somehow that seems appropriate—because every month I have a contest, going through the mail you've sent me, attention RTTY Loop! ■

ATV

Number 15 on your Feedback card

Mike Stone WB0QCD
PO Box H
Lowden IA 52255

ATV continues to fascinate many amateurs who have not yet experienced the thrill of being able to send their own video pictures. I've always been fascinated to be able to work ZS6BTD, ZS6AO, I3XQW, VO1BL, 8P6NC, ZL1BLV, HR2HH, FM7CD, ZL2FR, LU4EGO, OT6DI, OZ4IP, 5N0DOG, OH5RM, G3WW, and

VP9IH on phone as well as SSTV. The nearby DX crowd around the 14.230-MHz SSTV operating frequency always manages to disrespectfully QRM SSTVers because they don't realize that SSTVers have the right to operate those shrilling tones anywhere in the phone bands. SSTVers purposely huddle together around one little area, though, for companionship and so as not to QRM others. It irritates DXers, I think, to have the SSTV crowd work rare ones right

along with them on 15 and 20. On UHF FSTV hundreds of local amateurs are spellbound at ATV demos when they see the quality of full-color FSTV being sent on 420–440 MHz.

ATV seems to be the mode that is last on everyone's list of things to try out—but it is the most fun to operate. Why's that? I don't know. What could be simpler than a small UHF antenna, some coax, a tiny black box (downconverter), and a hookup to a TV set that probably is already in your shack. But if you just mention "TV" or "video," it scares the heck out of the people who think they have to be broadcast engineers to understand and oper-

ate the mode. Heck, I'm the editor/publisher of *The Spec-Com Journal* and I don't understand just how the video picture works. I know about lines and pixels and something called sync, but that's about it. Don't let the fact that you know nothing about ATV stop you from getting some gear and getting on. The mode needs your participation, and the work you put into it will be worth it because you'll gain a whole new bunch of friends.

FSTV Groups

One of the big problems in becoming active on FSTV is trying to find out where the nearby UHF operators are sending their pictures, what frequency they might be using on two meters, and what antenna polarization is being used. A lot of that work has been done for you. In 1983 the United States ATV Society was formed. The body was organized into 73 volunteer section manager positions. Although some positions are vacant, most states are well represented. Table 1 lists the USATVS managers. Feel free to contact your area's representative to help you get going on ATV (include an SASE if you write). If you're already active on FSTV, please update these volunteers as to the activity in your area.

Where Are They?

Metrovision (Washington DC area), formerly WR4AAG and now WA9GVK/R, has video out on 426.25. The local two-meter auxiliary audio frequency is 145.070 FM. Metrovision has over 40 ATV operators registered with the USATVS. In Michigan, WB8YOB has reported lots of activity. The Arrow repeater near Detroit is on temporary authority by the FCC to operate FSTV until the land-mobile business-band service gets going, but they are working on a 900-MHz system. KB8NR is active in the Flint area and is one of the original old-timers. W3SST reports good activity in the York, Pennsylvania, area not too far from the BRATS (Baltimore) ATV group. St. Louis ATV is alive and

Canada			
Alberta	Abe Mackay VE6AMU	New Hampshire	M. R. Natola WA1EZE
British Columbia	Allan Tucker VE4ADQ	Rhode Island	Open
Manitoba	Open	Vermont	E. J. Nowas N1QG
Maritime-Nfld.	Lewis Roberts VO1BL	Western Massachusetts	Mel Dunbrack W1BHD
Ontario	Lloyd Morgan	Northwestern	
Quebec	D'Arcy Brownrigg	Alaska	Frederick E. Wirth, Jr. KL7FAP
Saskatchewan	Open	Idaho	Albert Hale N7AL
Atlantic	Elmer R. Boyer W3YAH	Montana	Carter S. Emerit KA7CJZ
Delaware	John Shaffer W3SST	Oregon	Open
Eastern Pennsylvania	Bruce Brown WA9VGK/4	Washington	Robert Fielding W7BGP
Maryland-DC	Open	Pacific	
Southern New Jersey	Ralph Janowsky W2RPO	East Bay	Open
Western New York	Richard Davies K3SPI	Nevada	Open
Western Pennsylvania	Henry Ruh KB9FO	Pacific	Stephen S. Barnes KH6SB
Central	Don Miller W9NTP	Sacramento Valley	F. A. Burgess W6IEV
Illinois	Dean Andrewjecska AD9W	San Francisco	Gerard Wilson WA6RDA
Indiana	Ronald P. Hines WA9NJR	San Joaquin Valley	Open
Wisconsin	Pius Klein W8HJU	Santa Clara Valley	Clay Abrams K6AEP
Dakota	Open	Roanoke	
Minnesota	John J. Okopinski W5RET	North Carolina	Herman Perkins W4TVQ
North Dakota	Phillip Spencer W5LDH	South Carolina	Hap Griffin, Jr. WA4UMU
South Dakota	James P. Allen W5LWS	Virginia	Bruce Brown WA9GVK/4
Delta	Ed Draughn WA4KMG	West Virginia	Open
Arkansas	Clyde Miller WB4AOH	Rocky Mountain	
Louisiana	Allan L. Smith WB8YOB	Colorado	Terry W. Thero WB0OMN
Mississippi	Dave Morris WB8PJZ	New Mexico	Open
Tennessee	Dean Morelli N2DDL	Utah	Douglas R. Cook WB7SOW
Great Lakes	Open	Wyoming	George Schueler WA0GIL
Kentucky	Ken Barber W2DTC	Southeastern	
Michigan	Mike Stone WB0QCD	Alabama	Douglas Hall KD4EM
Ohio	Carl E. Schafer W8EFZ	Georgia	David A. Carter WA4VHP
Hudson	Dave Williams WB0ZJP	Northern Florida	Robert Sutter W3SOB
Eastern New York	John Gebuhr WB0CMC	Southern Florida	Bob Calvert N4IVB
NYC-Long Island	Ronald W. Sizer K1VYU	West Indies	Miguel O. Navarro KP4DGW
Northern New Jersey	Richard B. Kendall W1JFK	Southwestern	
Midwest	Phil Whitehouse W1GEE	Arizona	Bill Munsil N7AOU
Iowa		Los Angeles	John Ruckert WB6ZPN
Kansas		Orange County	M. H. Klos KA6GVY
Missouri		San Diego	Jack Dobbs WB6AXW
Nebraska		Santa Barbara	David B. Johnson NF6F
New England		West Gulf	
Connecticut		Northern Texas	Open
Eastern Massachusetts		Oklahoma	Mike Veldman WD0CTA
Maine		Southern Texas	Andy MacAllister WA5ZIB

Table 1. U.S. ATV Society state section manager volunteers. Please include an SASE when corresponding with these managers. Apply to WB0QCD for open positions.



Crystal Filters

ANNIVERSARY SALE SAVE - SAVE - SAVE

On a single order, save 10% on your first filter, 20% on second, 30% on third (or more).

EXAMPLES: 1 \$60 Filter for \$54, 2 for \$102, 3 for \$144, 4 for \$186, etc. To save most, get a group together; combine your orders. Save on Discounts, Save on Shipping Costs. Mix or Match Filter types in the same Price Group.

8-POLE FILTERS FOR KENWOOD

8.83MHz IF for TS120 through TS940 - Reg. \$60
Bandwidths: 250, 400, 1800, 2100, 6000Hz

Cascading Boards (used with 2100 Filter) for TS430S - \$20, TS520S - \$15, TS820S - \$15

455 KHz IF for TS830/930/940 - Reg - \$110

Bandwidths available: CW 400 Hz; SSB 2.1KHz.
NOTE: Do not mix with \$60 units for discounts.

Matched-Filter Pairs for Above - Reg. \$170 ea.
(8.83mHz and 455KHz) SSB: 2100, CW: 400Hz.
Super-Special: One pair - \$140, Two - \$260

3.395MHz IF for TS520, TS511, R599 - Reg. \$60
Bandwidths Available: 250, 400, *1800, 2400Hz

EXTRA SPECIALS!

*3.395MHz 1800Hz use \$50 List, then discount
TS440S Pair (CW & SSB) discounted price \$95

Same deal for
YAESU, DRAKE, ICOM and HEATH
Write or PHONE for Sale Prices.

LIMITED QUANTITIES - ORDER NOW!

SPECIFY: Make and Model Number of your Rig.
Frequency and Bandwidth of filter(s)

ORDER by Mail or Phone - VISA/MC or COD OK.

SHIPPING: \$5 US and Canada, \$12 elsewhere

**GO FOX-TANGO — TO BE SURE!
GET THE BEST — FOR LESS!**

FOX-TANGO Corp.

Box 15944, W. Palm Bch, FL 33416
Telephone: (305) 683-9587 ✓ 58

**TAKE A
LOOK
AT THIS...**

A New
HAM RADIO STORE
In
PENNSYLVANIA

NORTHEAST ELECTRONICS SUPPLY CO., INC.

WHITEHALL PENNSYLVANIA

(40 miles north of Philadelphia)

**Amateur Radio Supplies
Surplus Components
Electronic Equipment**

Guaranteed Repair Service

146.745
W3GQQ, WB3EAN
Bob & Diane Jones
1952 MacArthur Road

✓ 139
VISA
MasterCard
TeleCheck

215-820-0112

ARNOLD COMPANY

NEW PHONE: 214-395-2922 FOR SUPER FAST SERVICE!

WE'VE
MOVED!

✓ 116

RF CONNECTORS

RCA Plug to BNC Jack for TH-21AT	\$1.90
PL-259 American Made	\$6.55/ea.
BNC male to SO-239	\$2.25
PL-259 push-on adapter	\$1.50

TYPE "N"

UG21B/U - N Male	\$3.00
UG27/U - N Right angle	\$4.50
UG201/U - adapts BNC Female/N Male	\$4.00
UG806/U - BNC Female/N Female	\$4.00
UG146/U - UHF Female to N Male	\$4.00

5/4" POWER CONNECTORS!

FOR ALL 5 1/4 DRIVES	10	50	100
\$1.00 ea	\$.95 ea	\$.88 ea	\$.75 ea

5 1/4" DRIVE POWER CABLES

5 1/4" Power Connector on 2 ft. cable	\$1.75
EXTENSION 5 1/4" Power Cable: 2 ft. with Male on one end, Female on other	\$2.99

"Y" KIT ADAPTS YOUR SINGLE DRIVE P-5 FOR 2 HALF HEIGHTS: Includes 2 male connectors, 1 female connector and wire

1	10	25	50
\$2.75 ea	\$3.50 ea	\$3.35 ea	\$3.10 ea

8" DRIVE POWER CONNECTOR SETS: Set of 2. Specify your drive:

1	10	25	50
\$2.75 ea	\$2.50 ea	\$2.25 ea	\$2.00 ea

TI99/4A KEYBOARDS!

UPGRADE your TI99/4A:
Sinclair: We provide detailed documentation FREE with your keyboard! Get these while the supply last. New includes documentation

\$5.99

NUMERIC KEYPAD

Unencoded keypads feature each key terminated in its own switch. High quality NEW keypads have a great feel! Also has = +, - space, enter and comma keys - don't delay!

\$5.95

COMMODORE SERIAL CABLE

6 ft. with DB-25 Female on one end to User Port Connector

\$5 each... 10 for \$45

33% IBM PC SPEEDUP

NEC V-20 CPU directly replaces 8088 CPU in IBM PC/XT and compatibles. 100% Compatible. Simple Plug-in replacement

\$19.95

FLOPPY DRIVE CASE

New grey 2 piece horizontal case for 1 1/4" or 1 3/4" drives includes spacer for half ht.

\$8.95 or 2 for \$16

VIDEO TERMINAL

Used TIVDT-11 Terminals. Clean and working. Includes Terminal and Keyboard. Limited Qty. While they last! \$99

COMPUTER AC CORDS

INDUSTRY STANDARD AC CORD FOR IBM, etc.

New, 8 ft. cords. List \$4.95 each \$2.50

Also Chassis Mt. Socket \$.50

Cords 1 10 25

\$2.50 ea \$1.90 ea \$1.75 ea

NEW! 25 ft. AC Cord for IBM \$6.50 ea.

TERMS:

WE'VE MOVED TO SERVE YOU BETTER & FASTER!

Shipping \$3.00 per order unless otherwise stated. C.O.D. add \$1.90 extra. Texas residents add 5.125% tax.

Certified Check or Money Order shipped same or next day. Personal checks may be held 10 days. C.O.D. orders welcomed. Give us a call: (214) 395-2922. We ship UPS ground. Air available at extra charge. Give us a call for fast friendly service. FREE flyer sent with each order. NO CREDIT CARDS ACCEPTED.

ARNOLD COMPANY - Computer/Electronic Supply - P.O. Box 512, Commerce, Texas 75428.

MIC CONNECTORS ETC.

5, 6 Pin DIN Plug	\$1.00
7, 8 Pin DIN Plug	\$1.25
3, 4 pin Mic Plug	\$1.50
8 pin Mic Plug	\$3.50

Push-on adapter for Kenwood TH-21AT to BNC	\$1.90
Special	

TR-80 MODEL III CPU BOARDS

LIMITED SUPPLY!

Motherboards are surplus and come with Z-80, Character ROM and other components. Each is complete except ROM/RAM. One punch hole in each board is easily repaired. Not junkers that have had all the socketed chips removed! Each is a rebuildable unit. W/Doc.

\$13.50

10 day no risk money back offer on each!

MODEL III PARTS BOARDS: A few other chips missing or more damaged and are offered for parts only at a reduced price.

3 for \$15.00

1200 BAUD MODEM

Latest Technology! 1200/300 Baud Internal Halfcard Modem for IBM. Includes Software. Features Full Hayes Compatibility. Introductory Price.

\$169

MASTER POWER PANEL

All Steel Surge protecting master power control panel with separate illuminated switch for each of five peripherals! Attractive buff color. 10 amp. Surge/Spike protection panel fits conveniently between Computer and Monitor. Retail value \$129.

Special \$59

PROTECTED POWER STRIP

Four switched and two live sockets, plus illuminated switch and spike/surge protection at low-cost.

\$15

IBM PC/XT COMPATIBLE KEYBOARDS

ENHANCED Standard IBM layout with enlarged Return Key and lighted number and caps lock. Exceptionally crisp keytouch makes it a superb choice for the touch typist.

\$75

Keystroke 5151 style keyboard

\$99

PC/XT EXPANSION CARDS

Floppy Disk Controller with Cables

\$45

Color-Graphics and Mono Graphics Card

\$79

Parallel Printer Adaptor

\$35

Serial Async. Com. Adaptor

\$35

300/1200 BAUD Hayes Comp. Internal Modem

\$169

Disk I/O, FDC/PARISER/CLOCK/GAME

\$105

Surge Protection Multi AC Outlet Bar

\$15

IBM compatible ROM set for Basic

\$39

Plug-in EPROM programmer with software

\$149

Copy/Zip/Zipper Option Board

\$94

Keyboard Extension Cable for IBM

\$5

25 ft IBM AC Pwr. Cord

\$6.50

Parallel IBM printer cable, 6 ft.

\$17

Trade-ins accepted on IBM kbd., P.S., etc.

Call

IBM PC XT is a registered trademark of International Business Machines Corp.

Dealer Inquiries Welcome

IBM PC/XT COMPATIBLES

COMMANDER XT Entry System Semi-Kit



COMMANDER XT + 640K Mainboard Maximum IBM XT Compatible



135 Watt P.S. and Case



Superior Quality control insures our 135 watt IBM XT hard-disk-ready power supply will give you years of quiet and cool reliability. Side switch unit exactly replaces original IBM power supply.

\$85

Attention to detail makes

well with WB0ZJP leading a group of ten or so UHFers. They monitor 144.430 FM locally. In the *Davenport, Iowa*, quad-cities area, about 30 FSTVers are on the air DXing simplex and working the fancy horizontally polarized 100-Watt N9CAI ATV/R. Most of the Midwest, including the *Chicago* area, uses 144.340 for a two-meter "talk" channel. The *Minneapolis/St. Paul* ATV group is led by WA9NJR on 147.57 and is full of activity. California uses 434.0, with 146.43 for two-meter audio; there are also several repeaters. Write to W6ORG for more information. There is a big ATV group in the *Phoenix* area called the "AAA5 Club" that is led by N7AOU. In the *Calgary, Alberta*, area, about ten ATVers are active (VE6AMU); there are about thirty near *Toronto*.

Polarization

Antenna polarization is a nagging problem in some areas. Horizontal polarization is used for FSTV across most of the nation. This allows ATVers to also operate 432 SSB on the same antennas. Vertical polarization is used in California, Florida, Virginia, parts of Indiana (around Indianapolis), and parts of Texas. This allows 440-450 FM to be operated.

There are 60 plus ATV repeaters known to be operating in the country at last count (1982) and they are a mixed bag of polarization. It doesn't really matter which polarization mode is used in your area as long as you find out what the standard is and go with the crowd. Polarization has become quite a controversial subject among ATVers who like to DX. A number of horizontally polarized, omnidirectional antenna designs have been published, with a 7-dB K4NHN rib-caged modified Alford Slot having been successfully demonstrated this year at Dayton by the Cayce/Sumter/Columbia, South Carolina, ATV group.

Surveys show that the English-made Jaybeams and KLM beams are the most popular ATV antennas, followed by K2RIW's antennas and home-brew yagis. Good low-loss coax is very important on UHF frequencies, yet it is always the least-attended-to detail. A good rule of thumb is not to settle for anything less than Belden 8214 or Saxon 8285. Even with a 4.5-dB loss per 100 feet at 400 MHz, you will still lose nearly half of your power output and incom-



Photo A. 200-mile FSTV DX received by WB0ZJP in St. Louis.

ing receive on any long runs. The new Belden 9913 is now the hot buy for ATVers, with losses as low as hardline. Beware of 75-Ohm cable TV hardline. I know it is usually free, but you get what you pay for.

Preamps help amplify the received signal quite a bit. Some models can be switched out of line during transmit even at very high power levels. Advanced Receiver Research (Box 1242, Burlington CT 06013; (203)-582-9409) can provide you with some interesting brochures on preamplifiers if you ask for them. For more specific details on UHF antennas and coaxial cable, consult *Everything You Always Wanted To Know About ATV *but were afraid to ask* (\$9.95, Spec-Com Publications, PO Box H, Lowden IA 52255).

SSTV Equipment

A few years ago, getting into SSTV meant spending nearly \$1,000 to get the latest B/W scan converter, an audio cassette recorder, and a camera. Today you have a choice. You can still put out a lot of money and purchase the latest high-tech color SSTV equipment—Robot Research 1200C, \$1,295, 256 pixels across the screen by 240 lines; high-resolution color makes for a beautiful 8-, 12-, 24-, 36-, or 72-second image picture; the unit does all sorts of tricks including automatic tracking and split-screening. (For a four-page color brochure on the system, send an SASE to Robot Research, Inc., 7591 Convoy Court, San Diego CA 92111.) Or you can look around for some older/used equipment, computer software, or interfaces.

Let's think cheap for a minute (not a big mental leap for most of

us). Manufacturer-discontinued Robot 400 SSTV scan converters used to cost \$795 new. They can still be found "new" at \$395 on some dealers' shelves. Used converters can be found at most hamfests for as little as \$150 if you barter a bit. These units are B/W, have a good picture resolution of 128 pixels per line by 128 lines, and will store one full picture in memory. (They can be converted to color with 400C board updates.) You simply hook a closed-circuit-(CCTV) or VCR-type camera to the FSTV input and it will convert the "live" picture into a slow-scan one. A simple connection to the audio input of your HF rig's microphone connector is all that is necessary for transmit interfacing. One audio wire runs from your speaker to the back of the Robot 400 for incoming signals.

Transmission picture rate is the former standard of 8 seconds per frame. Contrary to popular belief, there is still a lot of 8-second SSTV being sent. All modern day SSTVers have 8-second compatibility. All you have to do is explain the type of gear you are running and they will switch over to the faster speed format for you. During the Saturday SSTV nets, net controls try to always send an 8-second formatted picture for those still running that type of gear. There have been dozens of modifications to the Robot 400, and Ralph Wilson WB0ESF has compiled most of them into a thick booklet called *Robot Mods*. It is available for \$11 ppd. from WB0ESF at 4011 Clearview Drive, Cedar Falls IA 50613.

If a Robot 400 is still a bit rich for your budget, then look for the older Robot 70 or SBE SSTV Converter gear. This equipment

utilizes P7 image burn tubes of green or yellow and must be viewed in a dark corner to be seen correctly. Good pictures can be received and sent on this type of equipment, and the cost is usually under \$100 for the whole outfit. Still too rich? How about a "reduced resolution" computer software program to receive and/or send SSTV. Radio Shack Color Computer owners have been watching SSTV pictures for years on a completely interfaceless (other than one audio wire from the receiver) 16K software program called "SLOWSCAN" from Kinney Software. This program has been modified to include just about all the current speed formats being used in SSTV, and it even receives and displays "false coloring." Dick Kinney W8MBD (121 Hampton Road, Donnelsville OH 45319) astounded the Dayton crowd this year with computerized SSTV for the Commodore 64. Unlike the CoCo program, which is receive only, SLOWSCAN III (C-64) receives and transmits by use of an owner-constructed interface card. Dick also has a video digitizer circuit and software that complements the program and construction kit. The C-64 software/kit packages sell for \$39.95 each. There is also SSTV computer software for IBMs and Apples.

Clay Abrams K6AEP wrote a ton of software and interface designs for the CoCo for a number of years, but he gave it up when a small band of pirates tried to make some quick cash by selling his work. Clay moved on to the IBM computer, and he has once again developed some high-resolution SSTV and FAX software that will knock your socks off. Write Clay at 1758 Comstock Lane, San Diego CA 95129. Ralph Taggart WB8DQT even came out with a single-chip circuit called a ROM-SCANNER, which stores and sends SSTV pictures. If you missed out on the Voyager and space shuttle SSTV pictures from space a couple of years ago, Wayne Harrell WD4LYN (Route 1, Box 185, Sycamore GA 31790) now maintains a unique video and SSTV audio tape program collection and he will make quality duplications for a moderate price. Write him for a catalog.

You see, you can spend \$39.95, a couple of hundred dollars, or up to \$1,295 to get going on SSTV. The important thing is to get in there and get your feet wet with something. ■

ALPHA AMPLIFIERS

"If you want the finest"




Model	List	Sale
77DX	\$5450	
78	\$3495	
374A	\$2595	
76A	\$1985	
76PA	\$2395	
76CA	\$2695	

Phone Don Payne, K4 ID,
for Brochure

Personal Phone—(615) 384-2224
P.O. Box 100
Springfield, Tenn. 37172

✓107

PAYNE RADIO

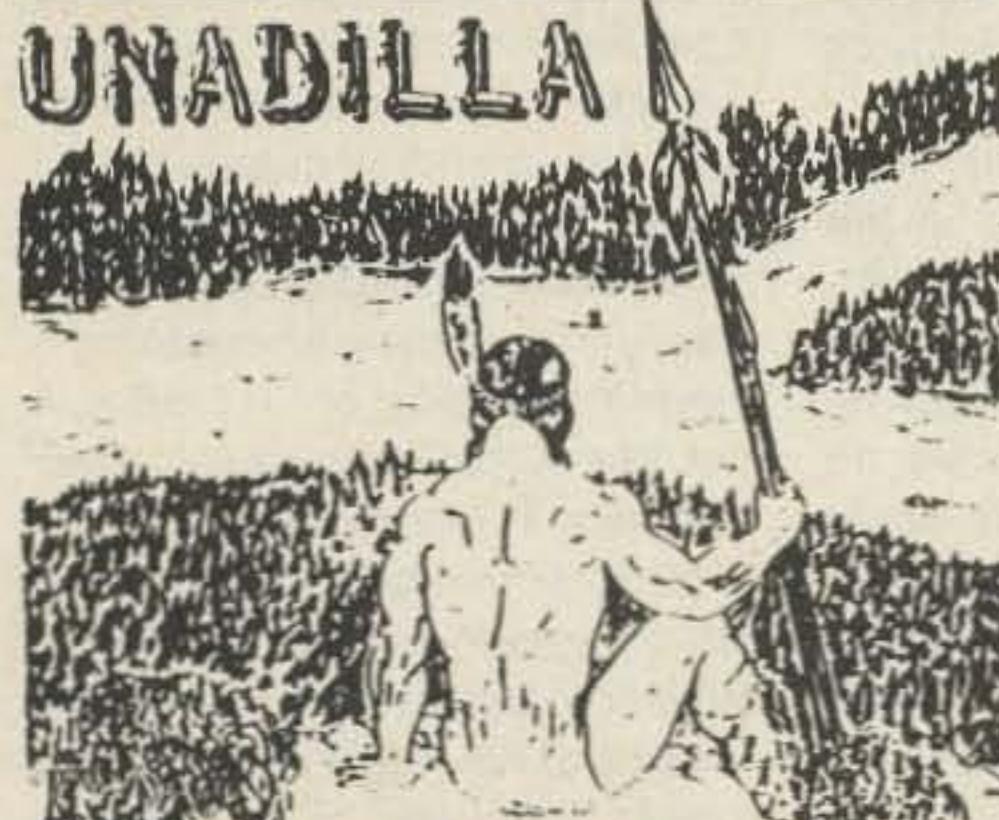

CONTACT YOUR DEALER
FOR MORE INFORMATION

Amateur Radio Baluns—
Traps-Remote Coaxial Switches

Or Write To:

UNADILLA DIV. of ANTENNA'S ETC.
P.O. Box 215 BV ANDOVER, MA. 01810
617-475-7831

✓136

Come to
Florida
in March for



The Winter Hamfest
and Computer Show

Sponsored by
Orlando Amateur Radio Club
March 13, 14, 15, 1986

For Reservations:

Dept. 173
P.O. Box 54781
Orlando, FL 32854-7811

✓96

THE LANZ COMPANY

3523 Dayton Avenue
Louisville, KY 40207

Telephone 1-502-895-1377

✓126

These Discs are a study guide and code practice program to pass your Ham Radio Theory Exam and Code Tests, for use with the Commodore 64 and 128 using the 1541 and 1571 Disc Drive.

The Study Guide outlines the basic electronic knowledge requirements for the Novice, Tech/General, Advance and Extra Class Amateur Radio Operator, including formulas and schematic symbols.

The Study Guide contains the FCC Test questions and the appropriate right and wrong answers that accompany each question.

Two sample tests with the key to the correct answers for each question.

QSO and Random Type Code Practice Programs are also included.

An additional disc may be purchased that will allow you to dump any question with the multiple choice answers that are viewed on the screen to printer. This is especially helpful to an instructor to be able to quiz students on a particular segment that is being taught.

THE PRICES OF THESE DISKS ARE AS FOLLOWS

Novice Class . . . \$19.95 . . . w/Printing Disc . . . \$29.90

Tech/Gen Class . . . \$29.95 . . . w/Printing Disc . . . \$39.90

Advance Class . . . \$29.95 . . . w/Printing Disc . . . \$39.90

Extra Class . . . \$29.95 . . . w/Printing Disc . . . \$39.90

All discs are guaranteed to function properly or will be replaced at no cost by returning the original disc. Also in the changing times of the Question Pool and Multiple Choice answers, your disc may be updated at a cost of \$5.95 each.

"...received my moneys worth with just one issue..."

—J. Trenbick

"...always stop to read CTM, even though most other magazines I receive (and write for) only get cursory examination..."

—Fred Blechman, K6UGT

U.S.A.	\$15.00 for 1 year
Mexico, Canada	\$25.00
Foreign	\$35.00(land) - \$55.00(air)
(U.S. funds only)	
Permanent (U.S. Subscription)	\$100.00
Sample Copy	\$3.50

CHET LAMBERT, W4WDR ✓11
1704 Sam Drive • Birmingham, AL 35235
(205) 854-0271

THE RF CONNECTION

"SPECIALIST IN RF CONNECTORS AND COAX"

Part No.	Description	Price
PL-259/USA	UHF Male Phenolic, USA made	\$.50
83-1SP-1050	PL-259 Phenolic, Amphenol	.75
83-822	PL-259 Teflon, Amphenol	1.45
PL-259/ST	UHF Male Silver Teflon, USA	1.30
UG-175	Reducer for RG-58	.20
UG-176	Reducer for RG-59 & MINI 8	.20
UG-21D/U	N Male RG-8, 213, 214, Amphenol	2.95
UG-21B/U	N Male RG-8, 213, 214, Kings	3.75
9913/PIN	N Male Pin for 9913, 9086, 8214	
	fits UG-21D/U & UG-21B/U N's	
UG-21D/9913	N Male for RG-8 with 9913 Pin	3.95
UG-21B/9913	N Male for RG-8 with 9913 Pin	4.75
UG-146/U	N Male to SO-239, Teflon USA	5.00
UG-83/U	N Female to PL-259, Teflon USA	5.00

WE BUY AND SELL ALL TYPES OF CONNECTORS:
RF — CIRCULAR — DATA

✓115

THE R.F. CONNECTION
213 North Frederick Ave. #11
Gaithersburg, MD 20877

(301) 840-5477

PRICES DO NOT INCLUDE SHIPPING
PRICES SUBJECT TO CHANGE
VISA, MASTERCARD, OR C.O.D.
UPS C.O.D. ADD \$2.00 PER ORDER

FERTIK'S
ALL NEW!



PARTS SPECIAL computerized boiler temp. controller PCB w/P.S., PCB, relays, transistors, \$2, 6 sets \$10.
PHOTOFOLIO heads or Caps. 3/\$1.
CHIP CAP. 1000pF 50V 10/\$3, 20/\$5.
HV TRANSF. 120/230V 1300V(TAP1100V) 750mA \$20.
SYNCHRONOUS Motors large selection, list free
SONALERT SC628, 6-28VDC, 3-14ma \$4, 3/\$10.
PROJECT BOX steel, hinged lid 10 x 8.5 x 4.5D \$5, 6/\$25.
READOUT C.A. 4-digit w/bezel 3 x 1.125 \$8, 2/\$15.
BAR INDICATOR 10-LED's Litronix RBG1000 \$2, 6/\$10.
ROCKER SW w/neon red indicator 10A 125VAC 4/\$2.
P.S. LAMBDA 2VDC ± 5% 27.5A LCS-D-2, 25 lbs \$75.
INSTRUMENT CASE 5 x 5.25 x 1.5 PAC-TEC CM5 \$2, 4/\$5.
WALNUT CABINET 13.25W x 4.25H x 8.5D \$3, 2/\$5.
RELAYS 200A NO 24-28VDC \$8, 2/\$15, 12VDC DPDT 5A
\$2, 5V DIP LM12800 DPDT 1A 3/\$3, 6/\$5.
STEPPER Motor 8 phase 5VDC 330mA 3°45'/step 2.29 x
2.29 x 3 w/specs \$10, 2/\$18.
CAPS small axial .22uf50V, 10uf20V, 22uf20V, 100uf.
SUB MIN CAP 2.2uf4V rad .065 diax. 15L 5/\$1.
METER PANEL horiz 25-0-25ua GE#50-85 \$1, 6/\$5.
BEAD THERMISTOR 5K-25°C w/specs 10/\$5.
ALLIGATOR CLIPS w/insulators blk 10/\$1.
WIRE WRAP #30 red, white, blue 100'/\$1.50, 500'/\$5.
HEADER 40-Pin wire wrap right angle .1 cent. GP 4/\$2.
18-Pin male both ends ribbon jumper 4.5" 6/\$2.
Minimum order \$10 PA Residents add 6% plus UPS shipping

FERTIK'S ELECTRONICS
5400 Ella St., Philadelphia PA 19120
215-455-2121

✓147

Q: Do you check the actual operating frequency of your rigs from time to time using a good frequency counter?

A: A 500 MHz pocket frequency counter, with 4 digits (switchable to 6) only \$49.95.
500 MHz handheld frequency counter, 7 big digits \$79.95.


Q: Do your rigs copy the really weak signals???

A: PA-19 Preamp, 0.5 to 200 MHz, 19 db (10x) gain \$9.95.

DIGITREX ELECTRONICS
division of NCI
10073 North Maryann
Northville, MI 48167

✓106
Personal checks or money orders are accepted.
Or call in a COD Phone 313-348-7313 NOW

MAKE CIRCUIT BOARDS
THE NEW, EASY WAY

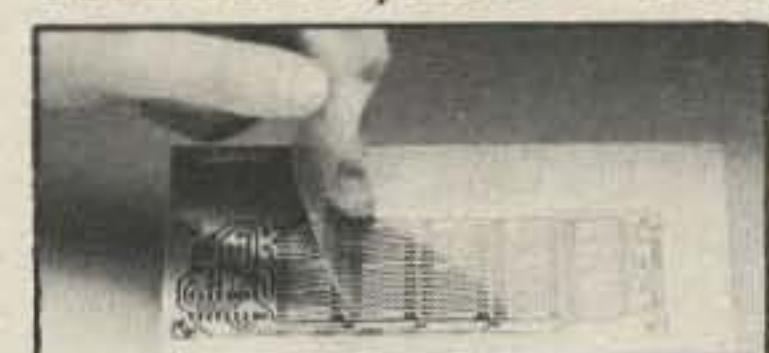

WITH TEC-200 FILM

- JUST 3 EASY STEPS:
 • Copy circuit pattern on TEC-200 film
 using any plain paper copier
 • Iron film on to copper clad board
 • Peel off film and etch

convenient 8½ x 11 size
With Complete Instructions

SATISFACTION GUARANTEED

5 Sheets for \$3.95 10 Sheets only \$5.95
add \$1.00 postage NY Res. add sales tax

The MEADOWLAKE Corp.

Dept.M, P.O. Box 497
Northport, New York 11768

✓55

ABOVE AND BEYOND

Number 14 on your Feedback card

Peter Putman KT2B
84 Burnham Road
Morris Plains NJ 07950

POLARIZATION

Actually, this all started out innocently enough... I was going to mow the lawn... really! It's just



Photo A. The horizontal vs. vertical polarization test range. The 5/8-wave vertical is in the foreground and the KLM beam is in the background. Crescent, VHF/UHF's most famous dog, guards the test setup.

that every time I go outside to work, I always take a look up the tower and begin to think of new antenna arrays.

An incident that occurred earlier this summer came to mind: I had helped my uncle Ray Putman N2FYC install a new 17-element F9FT yagi at his home in Alexandria Bay, New York. After the job was completed, my wife and I proceeded to our summer home on Wolfe Island, Ontario, about 20 miles upriver near Kingston.

Ray and I initiated successful contacts on 146.550-MHz FM simplex; he was using his beam mounted horizontally on a 10-foot tower, while I employed an old reliable KLM 4-element yagi strapped to one of the roof studs with shock cords—also horizontally polarized. He used a Kenwood TR-7400A, while I was barefoot with an ICOM IC-2AT.

During the course of our first QSO, Ray asked what, if any, difference in signal strength would occur if he changed his antenna to a vertically polarized installation. I was in a position to do just that and within seconds unlashed the shock cords and rotated the KLM 90 degrees. Ray reported a drop of three "units" on the Kenwood scale! If the meter was accurate, these would be 3 S-units, worth about 6 dB apiece.

Of course, even not knowing what those "units" meant (if anything), it was pretty obvious to Ray

that my signal had undergone substantial deterioration. And this brings me to why I didn't get the lawn mowed the other day...

One of the more common complaints I hear from newcomers to 2-meter SSB who previously operated 2m FM is that "there's no activity" or "I can't hear anyone" or even "all the signals are so weak. How do you make a reliable contact on SSB or CW?"

The problem becomes pretty obvious. In every case, the operators are still using the same old Cushcraft Ringo Ranger or Hustler vertical or KLM J-pole or even a vertically polarized yagi that was being used for FM work! It's not Murphy, but polarization losses that are doing them in—the same principles that allow satellites to transmit two different signals on the same channel by making sure they are polarized 90 degrees apart.

How much difference is there between signals received in the same plane as the receiving antenna and in opposite planes? Assuming ideal conditions with no scatter or reflection of signals, an infinite degree of isolation could be achieved between vertically polarized and horizontally polarized signals occupying the same channel. Since this isn't usually the case for the average ham, the number may be something finite and measurable.

In tests that I have run over the years, casual observation would indicate that as much as 20 dB or so difference is commonplace between stations with similar antennas 90 degrees apart from each other. How about that same operator mentioned earlier with a simple vertical trying to work a station with a simple yagi? To answer this question, I set up a test range in my backyard to see the results,

using my KLM and a selection of vertical mobile antennas.

The first setup looked like this: An ICOM IC-2AT was attached through a Bird 43 with 5-Watt slug to a Larsen magnetic-mount antenna, using a 5/8" whip. The antenna rested on an aluminum plate to yield a ground plane. All of this rested on a garbage can atop a wooden stool. Photo A shows this elegant setup. About 40 feet away, I fastened the KLM beam to my tower about 6' above ground in a vertical plane (Photo B). The output from the beam was fed to a Boonton Electronics Model 92 rf millivoltmeter with 50-Ohm terminated probe (Photo C).

I used the wattmeter solely to establish the presence of a stable signal from the 2AT. After keying the hand-held with a switch into transmit, I logged the readings from the millivoltmeter. The reading was +2 dBm with the handheld running 1 Watt output. Next, I turned the KLM 90 degrees and remounted the clamps (Photo D). After careful aiming and peaking, I logged a reading of -17 dBm, a net loss of 15 dBm of signal—over 2 S-units. Pretty substantial!

Next, I switched to a quarter-wave Larsen radiator (Photo E). With both antennas in the vertical mode and running 1 Watt output, I logged a reading of -1 dBm on the meter. Rotating the KLM beam horizontally then resulted in a reading of -14 dBm, a net loss of 13 dBm of signal. (Incidentally, this test also showed, in a crude fashion, that the 5/8-wave antenna exhibited gain of about 3 dB over the quarter wave.)

What if I used an improper radiator? A 220-MHz quarter-wave radiator—not resonant at 2 meters—was connected. In the vertical mode, I noted a reading of -7 dBm. When the KLM was rotated

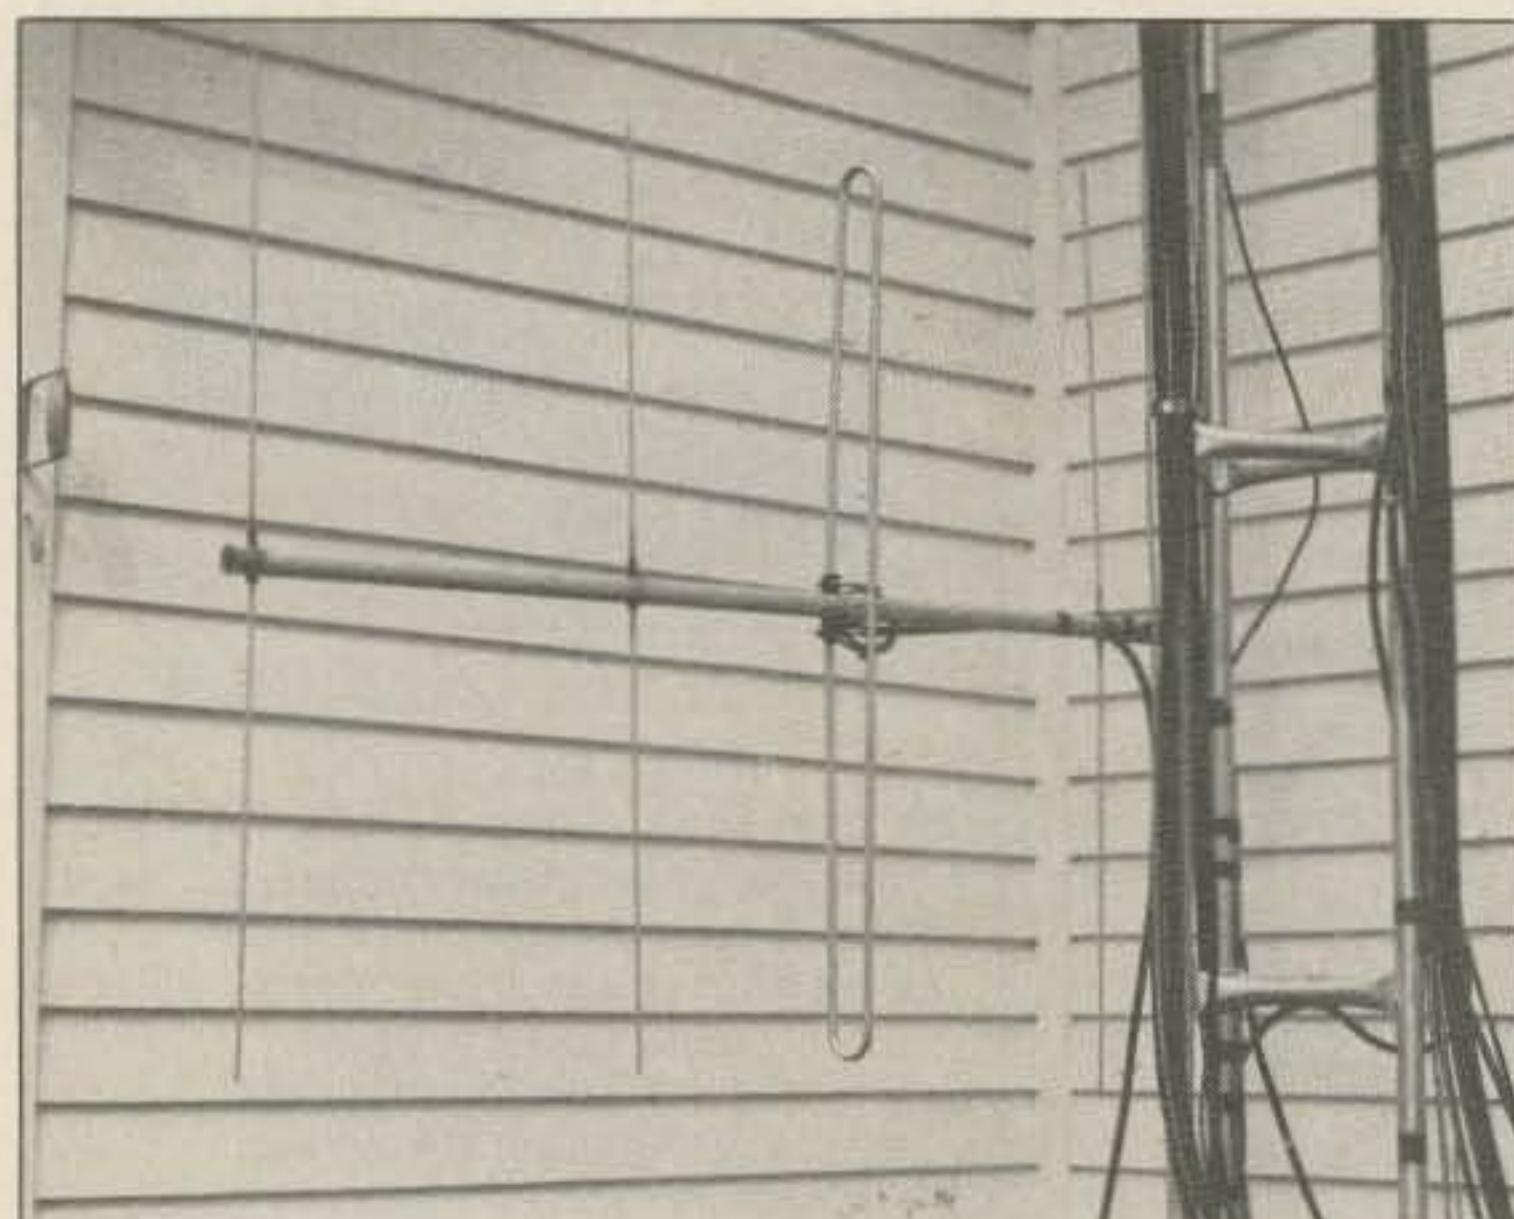


Photo B. The four-element KLM beam is connected to the tower and is vertically polarized. Output from the KLM beam is fed to an rf millivoltmeter.



Photo C. Rf millivoltmeter measuring output from the 5/8-wave Larsen antenna in a vertical plane.

90 degrees, the reading changed to -23 dBm, a loss of 16 dBm... almost 3 S-units. There was a pattern of sorts here. Note that I expected and noticed substantial reflection from objects around the KLM beam (including myself), much as might happen in the average amateur installation.

All right, let's put two and two together! Fact #1: SSB and CW modes aren't called "weak-signal modes" for nothing. Most of the signals you will encounter in this operation are many miles distant, using moderate- to high-gain yagis and 99% are horizontally polarized. Fact #2: When operating these modes, you'll often find an average signal level of S3 to S6 to be quite common. Conclusion: It's hard enough work to copy a station running S2 to S3 out of the noise while on SSB or CW. It's pretty well impossible to copy a station in the noise! Lose 12 to 18 dBm of that weak signal due to polarization losses, and you've lost the battle before it's begun.

The moral? If you plan to try some SSB or CW work on 2 meters, give it an honest shot and use a horizontally polarized yagi with some gain. Take that same weak signal, and you'll pull it right up out of the noise to Q5 copy with a 10 to 14 dB gain yagi.

Feature Dept.

I haven't featured anyone lately here, but a recent purchase brought a supplier to my attention that may help you as well. Kentronics, located in New Jersey, is a surplus test equipment store with a huge stock of goodies. The proprietor, Brian Kent, was helpful in locating a 50-Ohm BNC coupling for the previously mentioned Boonton rf millivoltmeter, allowing me to take signal measurements directly from antennas. He has a nice selection of used scopes, signal generators, and other test-bench material in good condition. Brian is located at PO Box 2444, Allaire Airport, Farmingdale NJ 07727, and his phone number is (201)-681-3229. Brian travels to many of the major hamfests (including Dayton). Just look for the fellow with the cigar amidst Tektronics scopes. Maybe he can help you as well.

Mailbag

Ron Manfredi WA2EIO of Merrick, New York, inquires about antenna changeover relays. Boy, have they gotten out of hand! Dow-Key division of Kilovac Corporation in California, makers of



Photo D. The KLM beam in a horizontal plane.

the familiar Dow-Key antenna relays for HF operation, also manufactures a line of relays for high-power VHF and UHF operation. Hold your breath, though; they will set you back about \$200 for DPST types and \$180 for SPDT types. A better way might be to consider plowing through flea markets for used units (they do surface from time to time). EME Electronics of West Germany makes an excellent UHF-type relay with N connectors. It's good for 1,500 Watts at 144 and 220 MHz, and in excess of 1,000 Watts at 432 MHz.

Coil voltage is 12 V dc, and the units are available in SPDT configuration with and without external contacts. Prices range from \$115 to \$130, depending on contact arrangement. Contact the U.S. importer (The PX Shack, 52 Stonewyck Drive, Belle Mead NJ 08502) for further details.

Arturo Nelson XE1FV writes from Guadalajara, Mexico, to ask why I didn't include the Yaesu 726R in my comparative review of the ICOM IC-471A and Kenwood TS-811A (June, 1986). The answer is easy: I couldn't locate one from an area ham at the time! These units were not purchased for the test, nor did they come from the manufacturers for evaluation. I simply located two local amateurs with the units who agreed to lend them to me for the comparison. This way, I'd be sure to get something off the shelf without paying for it (cheap! cheap!). I am aware that the 726R is a very popular unit, and I do plan to obtain one shortly for evaluation. Then I'll plug the numbers into the comparison chart to see how it stacks up against the other two contenders.

Arturo uses his for OSCAR operation primarily, although he's in the process of putting up antennas for weak-signal DX operation on 144 and 432 MHz. A harsh noise environment has prompted his construction of stub and cavity

filters for 144 MHz (welcome to the club, Arturo!). This is probably one of the more infuriating things you can encounter as an active VHFer. I know, because I fight it every winter, usually during the January VHF Sweepstakes! This is why I've gone to an ICOM 740S with transverter for the bulk of my 2-meter contest activity, since the 740 has an outstanding variable noise blanker. Between precipitation static and space heaters, it's a running battle to keep the QSO rate up. I'm not surprised that the noise blanker is inadequate in the FT-726R as Arturo reports—very few of the Japanese VHF multimodes have a decent noise blank-



Photo E. The test rf source, an IC-2AT, feeds a Larsen quarter-wave antenna. A Bird 43 monitors steady output.

er. The problem is that using one fixed setting for various types of noise won't work. ■

The ISOTRON

NO TUNERS!
NO RADIALS!

ANTENNAS FROM 160-10 METERS NO COMPROMISE!

Just a few comments from our satisfied customers:

"...I have used your 80/40 Isotron while stationed in Guantanamo Bay Cuba and it worked great. KE6ST Dept. Of The Navy"

"On January 11 and 12 I got into the 73 Magazine ssb contest. I didn't try for maximum number of contacts. Rather I tried for maximum number of states. In less than 2 hours total time I worked 32 states and Puerto Rico, that last state being about a 2800 mile haul from Aurora, Colorado."

"Not too bad for what looks like a bird feeder!"

"I just got my Isotron 40 on the air and it has surpassed my wildest expectations. My first evening QSO was with KB6EUC and wait—my second was with HK2GUP in Columbia, South America. The antenna sits on a 20 foot mast and that is it. My RST reports have been great."

"Congratulations on developing the Isotron. I am spreading the good word to my ham friends. I think it's a super, compact antenna which I have finally come!... KA2QWE"

"About two weeks ago I bought an Isotron 80 and just recently got it out of the box and set it up on a 15-foot pole. I am really intrigued by it and am having a lot of fun trying to convince other stations that it is only 15 feet high. I worked California when it was hanging by a single wire from the ceiling of the shack and it works even better!"

"N8EDF" (Photo: Isotron 160)

WHY NOT ENJOY THEIR OPERATING PLEASURE & GIVE US A CALL.
WE WILL LOOK FORWARD TO TALKING WITH YOU.

*40-METER - \$52.95 PLUS \$3.75 SHIPPING 80-METER - \$63.95 Plus \$4.75 Shipping

160-METER - \$149.95 PLUS \$5.50 SHIPPING

80-40 Combination - \$110.00 plus \$8.50 Shipping

ASK FOR PRICES ON OTHER MODELS

*See review in October 73, 1984

**See review in March 73, 1986

BILAL COMPANY

S.R. 2, Box 62, Dept. 91
Eucha, OK 74342 PH: 918-253-4094



LOOKING WEST

Number 19 on your Feedback card

Bill Pasternak WA6ITF
28197 Robin Avenue
Saugus CA 91350

AERO MEXICO CRASH

ARES preparedness in Orange County, California, was put to a test on Sunday, August 31. An Aero Mexico DC-9 jet on approach to Los Angeles International Airport collided with a single-engine Piper aircraft in the skies over Buena Park, a Los Angeles suburb. Both aircraft plummeted to the ground in the adjacent city of Cerritos. The DC-9 fell into a housing development, while the smaller aircraft crashed into a nearby schoolyard. All passengers and crew on the Aero Mexico jet and the three people in the Piper were killed. More people died as burning debris from the DC-9 destroyed 17 homes.

Amateur radio's involvement began when an official alert was called, activating the Orange County Red Cross and the Orange County Amateur Radio Emergency Service. ARES was to provide primary communications for Red Cross relief efforts. Using the facilities of the N6ME repeater on 145.40 MHz, the Red Cross Santa Ana Chapter amateur station WB6QDG was activated and it soon became the hub of Red Cross relief activities. Amateurs equipped with two-meter mobile and hand-held gear were dispatched by radio to the disaster site to coordinate communications for Red Cross operations. They also aided the communications of other disaster agencies. The operators performed like a well-oiled machine, proving again the value of regular emergency drill sessions. It appears as if two dozen or more Orange County ARES members were called into service before net management was transferred to the Long Beach Red Cross chapter office. Ancillary communications used the facilities of the KC6K 146.97 repeater in nearby Anaheim.

About an hour after activation, Net Control WB6QDG put out a call for mobile and portable packet stations. They were desperately needed at the crash site to handle high volume written traffic. With none initially available in the immediate area, hams from further away offered their services.

One was a mobile packet station in a recreational vehicle in Riverside some 75 miles from the crash. The other was an operator with a battery-powered portapacket system in Pasadena. One was ordered to the Santa Ana Red Cross chapter building and the other to the disaster site. As word of the disaster filtered down to the digital community, local packet stations joined the traffic net. One of the few problems noted was that poor communications exist between the digital and analog factions of the local amateur community. We were told that most digital enthusiasts spend little or no time monitoring local voice communication. Several people have already told *Westlink* that this situation will quickly be corrected.

Even in a time of disaster, the southern California kook corps had to come out of their ratholes and add to the grief. During the emergency communications on the N6ME repeater, there were several incidents of malicious interference. The net control and the operators ignored the jamming and most of the interference disappeared after what appeared to be T-Hunt teams gave the names and callsigns of the alleged jammers over the air. Maybe this is the only way to handle the spoilers.

Analysis

I first heard about the mid-air collision from Joe Merdler N6AHU. A quick call to the newsroom of the television station where I work confirmed that the accident had taken place, and I quickly tuned to CNN Headline News to see if they had any further word. Nothing there, but KCBS had interrupted normal programming and already had live pictures from the crash scene. Almost immediately I saw a ham talking into an FT-208R. Ham radio was on the scene as a part of the rescue and relief effort.

ARRL Division Director Fried Heyn WA6WZO has spent a lot of time in building up a functional ARES operation in the Orange County area. Fried had started the job long before he was elected a League Director. The Orange County group has their operation down to an exact science. A few

phone calls confirmed that it was Orange County ARES that had been activated to provide ancillary communications to the Red Cross. I learned the frequencies in use from April Moell WA6OPS. Being separated from the activity by a pair of mountain ranges, I plugged the numbers of the N6ME system into a private UHF remote base and began to listen and record.

What I heard made me proud to be a ham. The hams aiding the Red Cross relief operation utilized a minimum amount of talk to transfer a maximum amount of vital information. You could tell that the operators had spent their drill hours wisely. Their performance was all but flawless, proving once again the value of regular training exercises. However, this tragedy did point up two important negatives that require discussion.

Problem 1

The first problem was obtaining packet stations locally for dispatch to the disaster area and the relief coordination sites. As those of you who read last August's issue of *73* are aware, a vast network of packet operation has its own hub in the Los Angeles/Orange County area. In fact, packet is the fastest growing mode of amateur communication in California. There are thousands of packeteers already on the air, and hundreds of new stations are coming to the mode every week. So why, with all of this activity, should there be any problem in obtaining operators and gear?

The answer can be summed up in one word: specialization. As explained to me by fellow *73* columnist Harold Price NK6K, the "digital folks" and the "analog folks" have no common meeting ground. That is, the digital community spends little if any time monitoring any local voice communications, and voice-only operators who have no packet gear have no way to communicate with the digital-only groups. You can see why a problem with obtaining instant portable and mobile packet stations might arise. Harold feels that this problem can easily be overcome with a simple exchange of phone numbers, but I feel it has to go a lot further than that.

If packet radio is as important in emergency service work as it appears, then it is a must that all ARES groups have all their members packet-equipped—or if this is not economically feasible they

should develop a second, parallel "Digital ARES Network" by either absorbing or utilizing the services of an existing packet group. This means that an NCS or other individual in a position of responsibility must be equipped with both digital and analog gear, and have the ability to operate both simultaneously or through a second, parallel NCS.

The overwhelming need for packet in the aftermath of this disaster is definitely an indicator of things to come, and while packet will never completely replace voice, the latter may soon become subservient to the former in situations where a high volume of written traffic takes place. The only variable is the human typing the traffic into the terminal or the computer.

Even though I am not yet active on packet, I am convinced that it will become the backbone of local, regional, national, and international traffic interchange within only a few short years. The digital transponder on board the new Japanese amateur satellite, Fuji (which the AMSAT folks call Japan OSCAR 12), is only a sample of what's to come. I am willing to say that packet will be the key that fits the coffin marked "Morse code." Packet will lock and eventually bury that box forever.

Red Cross and RACES take note. Packet is not the "wave of the future." Rather, it's the "wave of the present," and it's the most logical answer to your high-volume written communications needs. If you are not equipped with it, it's time to get your act in gear. If you have been awaiting proof of need, that proof is now here. An emergency phone-up list of available local packeteers can only be a temporary expedient. For packet to become a fully functional part of emergency communications, its operators must involve themselves in ongoing weekly training exercises, and an integrated radio call-up system must be developed that alerts the digital folks of a communications need at the same time that it gives this alert to the voice communications people.

Problem 2

Now to the other problem noted during this emergency: wanton and malicious interference to communications on the N6ME repeater during the emergency relief effort. You would think that in as tragic a situation as this even the worst of the nut cases would

THE WESTLINK REPORT

THE AMATEUR RADIO NEWSLETTER



**HEARD THE LATEST?
YOU WILL IF YOU'VE READ
THE WESTLINK REPORT
\$22.50/YEAR
REQUEST YOUR FREE SAMPLE**

✓138

THE WESTLINK REPORT

THE AMATEUR RADIO NEWSLETTER

28221 Stanley Ct., Canyon Country, CA 91351

MOVING? Subscription Problem?

Call our toll-free number:

1-800-227-5782

Monday through Friday
9 a.m. through 5 p.m. EST

Please have your mailing label
in front of you, as well as your
cancelled check or credit card
statement if you are having
problems with payment.

PACKET RADIO

for the
Apple Macintosh

- Enhances your TNC so you can enjoy Packet Radio!
- Split screen display to separate, send and receive data.
- Full Macintosh User Interface.
- TNC Commands and Parameters on pull down menus.
- Routing file for digipeater routes.
- File transfer using Session Layer protocol.
- Command procedure files.
- Free upgrades for one year after purchase.
- Packages and supported TNCs:

MacPacket/TAPRterm \$49.95
-TAPR TNC-2 -AEA PK-80
-GLB TNC-2A
-MFJ Electronics MFJ-1270
-Pac-Comm TNC-200

MacPacket/TAPRterm \$49.95
-TAPR TNC-1 -AEA PKT-1
-Heath HD-4040

MacPacket/KANterm \$49.95
-Kantronics Packet Communicator
(KPC-1 V2.0 & KPC-2)

available from dealers or from:
Brincomm Technology
3155 Resin Street
Marietta, GA 30066

Georgia residents add appropriate state sales tax.
Macintosh is a trademark licensed to Apple Computer, Inc.

✓102

MIRACLE ROD®

FLUXLESS BRAZING ROD • 18" LONG

FLUXLESS ALUMINUM BRAZING WITH A PROPANE TORCH or OXYACETYLENE!



BRAZE ALUMINUM AS THIN AS AN ALUMINUM BEVERAGE CAN!

FABRICATE-REPAIR-MAINTAIN — ALUMINUM & ZINC ALLOYS — RADIO & TV ANTENNAE — BOATS — BOAT PROPELLERS — AUTO RADIATORS — DIES — CRANK CASES — GRILLS — AIR CONDITIONING SYSTEMS — FARM & DAIRY EQUIPMENT — IRRIGATION PIPES — STORM WINDOWS & DOORS — UTENSILS — HARDWARE — MODELS — MAY BE NICKEL OR CHROME PLATED AFTER. BONDS COPPER TUBING TO ALUMINUM AND CAN BE USED TO MAKE REPEATER CAVITIES. — ONLY YOUR IMAGINATION LIMITS YOU TO ITS USES! THOUSANDS OF SATISFIED CUSTOMERS.

TO ORDER 24 18" MIRACLE RODS™ Send check or money order for \$20 & \$3 shipping and handling (in U.S.) to: MIRACLE ROD, Post Office Box 791, Glasgow, KY 42141. VISA & MASTERCARD ACCEPTED (Give no. and exp. date)

UPS ORDERS CANNOT BE DELIVERED TO POST OFFICE BOXES, PLEASE GIVE ADDRESS WHEN ORDERING.

IF THE ROD FAILS TO FLOW ON ALUMINUM,
YOUR MONEY BACK GUARANTEED.

Made in the USA

✓120



The Key Element

SSB clarity starts at the microphone...

If you are not satisfied with the 'sound of your station'—it's no wonder—most "communications" mics you use were designed for industrial paging or p.a., not for the sophisticated SSB techniques. The HC-3 response gives maximum articulation for getting through DX pile-ups and has set the new standard for all.

You can easily install this small, advanced Heil element into your present old mic or order the new Heil HM-5 SSB mic using the high quality HC-3.

For more details or to order the Heil HC-3 element at \$19.95, the HM-5 SSB Mic at \$54.95, contact HEIL, LTD., Marissa, IL 62257 (618) 295-3000 (add \$3.00 shipping).



Hams who care about maximum results in getting over, around and through DX pile-ups now have another weapon in their arsenal... The Key Element!

✓108
HEIL SOUND Hearing Is Believing...


Keep It Simple . . .



with the new Powerful
MAGNA-GRAB TOOL RACK

- AMERICAN MADE • CHROME PLATED
- ATTRACTIVELY PRICED

Mod. TMC-100 13" (mag. lgth.) \$12.95 + \$3.50 s/h
Mod. TMC-200 25" (mag. lgth.) \$18.95 + \$3.50 s/h
Texas residents please include 6% sales tax



✓131

Texas Magnetics Corp.

Special Products Division, Dept. 100R
2714 National Circle
Garland, Texas 75041
(214) 271-2551

TMC TMC
"Making Life Easier With Magnets"

SCOPE BUY-OUT!!!



OS-106/USM-117 PORTABLE SCOPE, rugged military DC to 6 MHz unit with MX-2996 high-gain plug-in. Sweep 0.1 us to 0.1 sec in 19 steps. Sensitivity 0.01 to 20 V/div in 11 steps. 115 VAC 60 Hz; 8.5 x 9.8 x 15, 20 lbs sh.

Used-reparable \$165 Checked \$285 \$175

OS-106 with MX-2995 dual-trace plug-in (less MX-2996), repairable \$165 Checked \$225

MANUAL for USM-117, partial repro \$15

MANUAL for MX-2995, partial repro \$12

Prices F.O.B. Lima, O. • VISA, MASTERCARD Accepted.
Allow for Shipping • Write for latest Catalog Supplement
Address Dept. 73 • Phone: 419/227-6573

✓75

FAIR RADIO SALES

1016 E. EUREKA • Box 1105 • LIMA, OHIO • 45802

10 DAY MONEY-BACK GUARANTEE

You may order any GARANT TD-Trap Dipole, and GARANT GD-Windom Dipole, any GARANT GB-Beam, or any EMOTATOR 105TSX, 502CXX or 1105MXX, for a 10-day no-risk inspection. Have a look at them in the privacy of your home and if you don't like what you see return the item pre-paid to our warehouse. We'll refund the full purchase price less shipping charges. We trust in what we sell!

GARANT ANTENNAS (SHI)

GB33DX	\$399	+ASK	105TSX	\$ 239	7.00
GB43DX	\$525	+ASK	502CXX	\$ 349	9.00
GB+7	\$149	+10.00	1105MXX	\$ 545	11.00
TD-2005/S	\$127	+6.90	1200FXX*	\$ 859	15.00
TD-2005/H	\$137	+7.90	1500FSX*	\$ 4195	26.00
TD-160	\$ 57	+6.90	EV-700*	\$ 889	9.00
GD-6/500W	\$ 99	+6.90	EV-700DX*	\$ 1590	18.00
GD-6/2KW	\$199	+7.90	#303	\$ 49	6.90
GD-8/500W	\$119	+7.90	#300	\$ 89	6.90
GD-8/2KW	\$219	+7.90	#1211	\$ 49	6.90
GD-7/500W	\$129	+8.90	#1213	\$ 59	6.90
GD-7/2KW	\$229	+8.90	#1217*	\$ 69	6.90
GD-9/500W	\$149	+9.90	105PSX*	\$ 139	7.00
GD-9/2KW	\$249	+9.90	502PSX*	\$ 169	7.00
GD+2	\$ 29	+6.90	502PSX*	\$ 169	7.00
GD+160	\$ 59	+7.90	*These items are not stocked regularly!		

Prices are subject to change without notice. PAYMENT with VISA, MASTERCARD, CHEQUE or MONEY ORDER. TECHNICAL DATA HOTLINE 1-807-767-3888 Franchised Dealer for GARANT and EMOTATOR.

ODURO ENTERPRISES, Box 3045 ✓145
210-565 Corydon Ave. Winnipeg, MB.
Canada. R3C 4E5. (204) 284-4558

A TOP QUALITY



✓125

ANTENNA
PUTS A
“World of DX”
IN YOUR
HAM SHACK

1344 Baur Boulevard St. Louis, Mo. 63132

1-314-994-7872

have some respect for the dead and dying. Well, in an area where jammers consider themselves to be an elite corps, and where everything has been tried—including prison terms—to end jamming with only a modicum of success, what can you expect. I have long maintained that the real key to ending the problem is to never permit "a certain amount of jamming" to become the accepted norm. Well, in the Los Angeles area, accepting a certain amount of jamming appears to have become an acceptable standard of operation on the two-meter band, and it's the main reason that I spend very little of my time in Los Angeles on two meters. On the other VHF and UHF bands, no level of malicious interference is tolerated, and the rumor mills run rampant with stories of why "this jammer or that is now hospitalized." In fact, it's rather reminiscent of two-meter FM in New York City in the late 1960s. For the pacifists out there, I am not condoning violence. In fact, I cannot even say for certain that it has taken place. Maybe it's just all rumor and innuendo started to keep the fanatic fringe in its place. Whatever it is, it works.

But that's 220, 450, and other bands, not two-meter FM in Los Angeles. So, it was almost with amazement that I heard a transmission similar to this: "This is

"Even in a time of disaster, the southern California kook corps had to come out of their ratholes and add to the grief."

W6XXX mobile. I'm parked outside the home of NX6XXX and he is jamming the emergency communications." A definite statement of fact from a member of a T-Hunt team. Not one of those "I think it's NX6XXX" type transmissions from a base station 30 miles away. And the result? Silence from the jamming station. I can only hope that what this is really saying is: "We in southern California have had it with you jammers,

and we are just not going to take it anymore! See you in court, jammer." It's about time.

Fuji

There is a rather interesting aside happening between AMSAT and the Japan Amateur Radio League. It's not a knockdown, drag-out fight, but nevertheless it's taking place and it's over the name of the newest amateur satellite. Before its successful launch in August, we all knew the bird by the same name. It was called JAS-1. Some places wrote the name as "Jazz-One," but at least everyone was content with the one name. On August 12, that all changed. From JARL HQ in Tokyo I received the following telex message: "The H-1 rocket carrying the first Japanese Amateur Satellite JAS-1 has successfully lifted off at 20:45 UTC 12 August 1986 from the Tanegashima Space Flight Center." A few hours and several telex messages later, the following confirmation of success reached the Westlink newsroom, reading in part: "...new born satellite JAS-1 was named 'Fuji' by JARL today. Please call it 'Fuji' from now on... Shozo Hara, President - JARL."

That seemed simple enough. The JARL and its associated organizations designed, built, and orbited the bird, so as far as I was concerned it was theirs to name as they pleased. Why should anyone want to interfere? I really don't know the answer, but you might want to ask AMSAT since they insist on calling Fuji "Japan OSCAR 12," or more simply "JO-12." This apparently upset the Japanese more than a bit, and probably accounted for the delayed but emphatic follow-up telex bearing the Fuji designation.

Anyhow, the AMSAT folks appear to be adamant that they will be the ones giving Fuji its name, and as of September 1, 1986, the name that AMSAT is sticking with is JO-12. AMSAT's *Amateur Satellite Report* of this date fails to take note of the JARL preference for the Fuji designation. Who will eventually win this low-key international battle of the satellite name? In this case, I'll put my money on the Japanese. After all, it is their satellite, and they should be permitted to call it anything that they want. Who knows, maybe by the time you read this the satellite will have a single and accepted moniker. ■

Tired of listening to all the chatter on your favorite VHF/UHF repeater while waiting for that important call?



**Auto-Kall
AK-10**

You don't have to anymore with the Auto-Kall, AK-10, a ready-to-use DTMF (Touch-Tone*) selective calling system. All you add is the radio!

FEATURES:

- ★ Completely assembled and ready to use. Simply connect to external speaker jack on your rig. Audio mini-plug patch-cord included.
- ★ Easy setting of your personal 3-digit code in seconds with small rotary switches. No jumpers to solder.
- ★ 8-15 VDC for mobile/portable operation or use supplied 117 VAC power supply for base station operation.
- ★ Built-in 8-OHM speaker turns on when your code is received to let you hear the station calling.
- ★ Resets automatically to silent-standby and leaves red LED on to let you know someone called if you were away from the rig.
- ★ CMOS circuitry provides for low current operation.
- ★ Measures only 1 1/4 x 3 x 5 1/2 inches.

Only \$79.95 (Plus \$3.00 Shipping/Handling)

MOTRON ELECTRONICS ✓127
695 West 21st Ave., Eugene, OR 97405

For Phone Orders Call — (503) 687-2118
Use your Visa or Master Card or send check or money order.

*TOUCH-TONE IS REGISTERED TRADEMARK OF AT&T

NEMAL ELECTRONICS

Your Authorized Distributor For



BELDEN

INTRODUCTORY SALE!

Belden No.	Nemal No.	Description	Per 100 ft.	Per ft.
8214	1102B	RG8 /U Foam 96%	\$45.00	.50
8237	1100B	RG8/U Poly 96%	39.00	.44
8241	1500B	RG59/U Poly 96%	13.00	.15
8267	1130B	RG213/U Poly 96%	53.00	.59
9269	1600B	RG62A/U Poly 96%	15.00	.17
8216	1450B	RG174/U Poly 96%	12.00	.14
9913	1180	Low Loss 50 Ohm	46.00	.58

OTHER QUALITY CABLES

Nemal No.	Description	Per 100 ft.	Per ft.
1110	RG8X 95% Shield (mini 8)	15.00	.17
1130	RG213/U Mil Spec. 96% Shield	34.00	.36
1140	RG214/U Mil Spec. - Silver	155.00	1.65
1705	RG142B/U Teflon - Silver	140.00	1.50
1310	RG217/U 5/8" 50 Ohm Dbl. Shld.	80.00	.85
1470	RG223/U Mil Spec. - Silver	80.00	.85

ROTOR CABLE — 8 COND.

8C1822	2-18 Ga., 6-22 Ga.	19.00	.21
8C1620	2-16 Ga., 6-20 Ga. Heavy Duty	34.00	.36

HARDLINE — 1/2"

FXA12	Smooth Alum. w/black jacket	79.00	.89
FLC12	Corrug'd. Copper (EQ. Heliax LDF)	159.00	1.69

CONNECTORS — MADE IN U.S.A.

NET20	Type N for Belden 9913	4.75
PL259	Standard Plug for RG8, 213	.65
PL259AM	Amphenol PL259	.89
PL259TS	PL259 Teflon/Silver	1.59
UG21D	Type N for RG8, 213, 214	3.00
UG175	Adapter for RG58	.22

Call or write for complete Price List

Shipping: Cable — \$3.00 per 100 ft.

Connectors — and 10%, \$3.00 minimum

Orders under \$20 Add \$2 Handling
Nemal's new 32-page Cable & Connector Selection Guide now available at no charge with orders of \$50 or more or at a cost of \$4.00 individually.

COD add \$2.00.

Florida Residents add 5%.

NEMAL ELECTRONICS

12240 N.E. 14th Ave., Dept. S., Miami, FL 33161

Telephone (305) 893-3924

WIN IT ALL!

in 73's Megaband Sweepstakes

Enter
NOW!



Grand Prize:

**Yaesu's FT-767GX Multi-mode
HF/VHF/UHF transceiver**

It's everywhere! Yaesu's hot new FT-767GX is an all-mode, all-band HF transceiver and a sophisticated VHF/UHF multimode and a general-coverage receiver...all in one package. Standard equipment includes a built-in automatic antenna tuner for the HF bands, a digital power-out and swr meter, an electronic keyer, ten memories that store frequency, mode, and CTCSS info, full QSK CW, i-f shift, an i-f notch filter, and two vfos. It all adds up to the most versatile radio you'll ever own.

This amazing radio can be yours! Just send in the attached entry card or the coupon below...and start watching for the letter that says YOU'VE WON!

**73 gives you
all-band coverage:
Every mode, every month.
Check the YES box on your
entry and receive 73 at a
special price—just \$19.97
for 12 months; you'll save
43% off the regular cover
price!**

OFFICIAL RULES (No Purchase Necessary)

1. On an official entry form or a 3" x 5" piece of paper, hand print your name, address, and zip code. Enter as often as you wish, but mail each entry separately to 73's Megaband Sweepstakes, Circulation Department, 70 Rte. 202 North, Peterborough, NH 03458. Entries must be received no later than December 31, 1986. The drawing will be held by January 31, 1987. All entries become the property of 73 Amateur Radio, which reserves the right to print the name and address of the winner.

2. Winner will be selected in a random drawing from among all entries received, under the supervision of the publisher of 73 Amateur Radio, whose decision will be final. Only one prize will be awarded in this Sweepstakes. Winner will be notified by mail and may be required to execute an affidavit of eligibility and release. Odds of winning will depend on number of entries received. The publisher of 73 Amateur Radio will arrange delivery of prize. Taxes are the responsibility of the winner. Any manufacturer's warranties will apply, but the publisher makes no warranties with regard to any prizes. Prize is not transferable. No substitution for prize.

3. Sweepstakes open to all residents of the U.S., its territories and possessions, who are at least 18 years old, except employees (and their families) of the publisher of 73 Amateur Radio, its affiliates, and its advertising and promotion agencies and Yaesu USA. Void where prohibited or restricted by law.

4. For the winner's name, send a stamped, self-addressed envelope to 73 Amateur Radio, Circulation Department, 70 Rte. 202 North, Peterborough, NH 03458.

yes!

Enter me in 73's Megaband Sweepstakes and start my subscription to 73 Amateur Radio for the term checked:

One year for \$19.97 Two years for \$29.97

Check Enclosed

MC

VISA

AE

Card# _____

Exp. Date _____

No, I do not wish to subscribe now, but please enter my name in the 73 Amateur Radio Sweepstakes.

Name _____

Call _____

Address _____

City _____

State _____

Zip _____

Offer valid only in the U.S., its territories and possessions. Please allow 4-8 weeks for delivery of first issue. S6A600

Number 27 on your Feedback card

NOTES FROM FN42

Zambia has joined us this month and 73 International now covers the world from A to Z! Now how about the only four (possible) missing letters in between: O, Q, W, and Y? The first three can be only Oman, Qatar, and Western Samoa (an independent state) but either the Yemen Arab Republic (North Yemen) or Yugoslavia would cover the last. We are waiting....



BRITISH WEST INDIES

Roger A. Corbin ZF1RC
Secretary Cayman Amateur
Radio Society
PO Box 1549
Grand Cayman
British West Indies

Have you been wondering why you did not receive a QSL card from your contact with a station using a ZF call? Here's the explanation, and some additional information from a lovely spot in the Caribbean Sea.

ZF2 callsigns may be used only when an operator is in the Cayman Islands. An operator who signs /ZF2, portable ZF2, or ZF2 maritime mobile is operating illegally and QSL cards received by the bureau operated by this club for stations using the above calls will be destroyed.

A year ago this month (November) a station using ZF1RC with an operator calling himself Ron was operating illegally, and a number of amateurs seeking QSL cards now cannot be served. To compound the confusion, that was the call assigned to me a month later, on December 21, 1985.

The Cayman Islands do have reciprocal licensing agreements with a number of countries, including the United States, but sometimes we get left off the lists. It may appear to many amateurs that it takes a very long time to get a response to QSL cards sent through the local bureau. This is due mainly to the fact that most of the ZF2 operators visiting our country forget to make arrangements for cards to

be forwarded. We are taking steps to try to correct this situation. This club now operates an open repeater on 146.76 with a 600-kHz negative input frequency. The simplex frequency most regularly used locally is 146.52 MHz. 73, ZF1RC.



CANADA

Dean Milner VE1CBF
28 Castle Drive
Sydney, Nova Scotia B1S 2A2
Canada

Canada returns to 73 International after an absence of nearly three years...but was well-represented during that period in other parts of the magazine. Our new correspondent, VE1CBF, would like to know what readers would like to hear about. Let us know here at 73 (mark for "International Editor") or, if you write him directly, send us a copy of your letter so that we can know, too! Time and space constraints for this issue made it necessary to pass on only the following from his first report.

The Canada Day Contest in July showed again a noticeable increase in participation of amateurs from outside Canada, some seeking points toward the Canadaward. The next Canada Contest will be, as usual, on the last weekend in December. For a copy of the rules and/or more info on the Canadaward, write the Canadian Amateur Radio Federation (CARF), PO Box 356, Kingston, Ontario, K7L 4W2, Canada.

The fight continues in the case of Jack Ravenscroft VE3SR, off the air per a court injunction "as he was creating a nuisance...by interference to electronic appliances" in a neighbor's home. An appeal has been filed against the liability finding and damages awarded, and the case is being followed closely by the Department of Communications and all rf spectrum users. Jack's legal expenses currently stand in excess of \$15,000, and he is grateful to amateurs from other countries

who have made contributions to the Jack Ravenscroft Susceptibility Defense Fund (PO Box 8873, Ottawa, Ontario, K1G 3J2, Canada) to help him out. He also is grateful for the moral support he has received through letters.



CUBA

Eduardo Fernandez Rodriguez
Presidente, Federacion de
Radioaficionados de Cuba
Apartado Postal No. 1
Habana 1
Cuba

We welcome Cuba to 73 International; Rafael Fernandez CO2RX will be our correspondent. Sr. Fernandez is the FRC officer responsible for liaison with the IARU and knows a lot of amateurs who can supply him with items for this column.

We have the Cuba DX Group (G.DX.C.) created about one half year ago which has about 55 hams. We have a certificate for those who establish two-way contacts with four members of the group. The FRC invites you to join the Group for life membership. For 30 IRCS or US\$10 we will send you a membership certificate, decals from the G.DX.C. and FRC, a G.DX.C. pennant, an FRC pennant (all these in full color), a personal unit number, postcards and stamps of Cuba, and a roster of members. Your station will count 1 point for the G.DX.C. Award.

With your application (send to the above address) let us have your full name and address, DXCC countries confirmed, itemized list of your equipment and antennas in use, bands and modes you operate, languages you speak, and let us know: Do you QSL? Have you been on any DXpeditions as an operator? Do you have any of the following awards: DXCC, WAS, WAC, WAP, WPX, WAE, AAA, ADXA, DUF, BERTA, Cuba, G.DX.C., Caribe and/or America (see some of these described below)?

Concerning visitors, we have had Canadian, German, Spanish, and Bulgarian hams who have operated our club equipment and made many contacts. If anyone wants to visit and operate, we recommend you let us know two or three months in advance to

make the necessary coordination with the Frequency Management Authority in order to get a provisional license—or you could write direct to: El Director, Direccion de Frecuencias Radioelectricas, Ministerio de Comunicaciones, Plaza de la Revolucion, Habana 6, Cuba.

Concerning the growing of amateur radio in our country, it is going on. For instance, in 1981 we had 315 members in our Federation who were licensed to transmit and in 1986 we have 730 members with 464 licensed to transmit, and we have 534 licensed stations, 18 of which are club stations.

We have a QSL Bureau, of course; it is at the FRC address.

Cuban prefixes are CM for second class stations or Novices and CO for first class stations and Juniors. CL and T4 are for special events only.

South of Cuba is a key called Cayo Largo which is a wonderful place for DXpeditions, tourists, and rest, for which a visa is not needed—it is possible to arrive there direct by plane or ship. I would be happy to provide additional information if you would like.

[Editor's Note: Remember always to send IRCS with letters you write as a result of information you read in these columns, when you are asking for replies.]

AWARDS

For OM's and SWLs, SSB, CW, 1 band or 5 bands, do not send QSLs but only list of contacts including date, time, band and mode (certified by your radio club or two licensed hams), with 10 IRCS or US\$2 per award; mail to Award Department, G.DX.C. at above FRC address: Cuba Award. Work (hear) the eight districts of Cuba (CM1-8, CO1-8); up to three missed districts may be substituted for with radio club stations. Use three suffix letters. America Award. Work (hear) countries and islands in America. Class III (category C) 30 countries and islands; Class II (category B) 40; and Class I (category A-Excellent) over 40. G.DX.C. Award. Work (hear) four members of the Group, any nationality. Identify with QSLs. For the Caribe Award, any mode, any band, work (hear) countries and islands in the Caribbean, including XE, VP1, TG, HR, YN, TI, HP, HK, and YV. Class III (C) 20-24 countries and islands; Class II (B) 25-29; and Class I (A-Exc.) 30 and over.

MFJ ACCESSORIES

300 WATT ANTENNA TUNER HAS SWR/WATTMETER, ANTENNA SWITCH, BALUN. MATCHES VIRTUALLY EVERYTHING FROM 1.8 TO 30 MHz.



\$99.95

MFJ-941D


**NEW
FEATURES**

MFJ's fastest selling tuner packs in plenty of new features!

- New Styling! Brushed aluminum front. All metal cabinet.
- New SWR/Wattmeter! More accurate. Switch selectable 300/30 watt ranges. Read forward/reflected power.
- New Antenna Switch! Front panel mounted. Select 2 coax lines, direct or through tuner, random wire/balanced line or tuner bypass for dummy load.
- New airwound inductor! Larger more efficient 12 position airwound inductor gives lower losses and more watts out. Run up to 300 watts RF power output. Matches everything from 1.8 to 30 MHz: dipoles, inverted vee, random wires, verticals, mobile whips, beams, balanced and coax lines. Built-in 4:1 balun for balanced lines. 1000V capacitor spacing. Black. 11x3x7 inches. Works with all solid state or tube rigs. Easy to use, anywhere.

RTTY/ASCII/CW COMPUTER INTERFACE

MFJ-1224
\$99.95

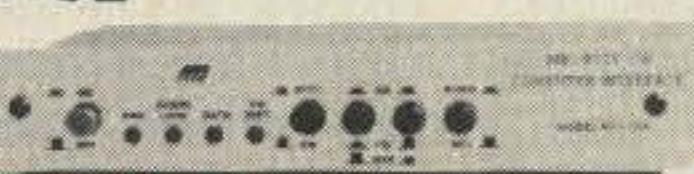

Free MFJ RTTY/ASCII/CW software on tape and cable for VIC-20 or C-64. Send and receive computerized RTTY/ASCII/CW with nearly any personal computer (VIC-20, Apple, TRS-80C, Atari, TI-99, Commodore 64, etc.). Use Kantronics or most other RTTY/CW software. Copies both mark and space, any shift (including 170, 425, 850 Hz) and any speed (5-100 WPM RTTY/CW, 300 baud ASCII). Sharp 8 pole active filter for CW and 170 Hz shift. Sends 170, 850 Hz shift. Normal/reverse switch eliminates retuning. Automatic noise limiter. Kantronics compatible socket plus exclusive general purpose socket. 8x1 1/4x6 in. 12-15 VDC or 110 VAC with adapter, MFJ-1312. \$9.95.

RX NOISE BRIDGE

Maximize your antenna performance!



\$59.95 MFJ-202B

Tells whether to shorten or lengthen antenna for minimum SWR. Measure resonant frequency, radiation resistance and reactance.

New Features: Individually calibrated resistance scale, expanded capacitance range (± 150 pf). Built-in range extender for measurements beyond scale readings. 1-100 MHz. Comprehensive manual. Use 9 V battery. 2x4x4 in.

INDOOR TUNED ACTIVE

NEW! IMPROVED! ANTENNA
with higher gain "World Grabber" rivals or exceeds reception

of outside long wires! Unique tuned Active Antenna minimizes intermode, improves selectivity, reduces noise outside tuned band, even functions as preselector with external antenna. Covers 0.3-30 MHz. Tele scoping antenna. Tune, Band, Gain, On-off bypass controls. 6x2x6 in. Uses 9V battery, 9-18 VDC or 110 VAC with adapter, MFJ-1312, \$9.95. **MFJ-1020A \$79.95**



POLICE/FIRE/WEATHER 2 M HANDHELD CONVERTER

Turn your synthesized scanning 2 meter handheld into a hot Police/Fire/Weather band scanner! **\$39.95**

144-148 MHz handhelds receive Police/Fire on 154-158 MHz with direct frequency readout. Hear NOAA maritime coastal plus more on 160-164 MHz. Converter mounts between handheld and rubber ducky. Feedthru allows simultaneous scanning of both 2 meters and Police/Fire bands. No missed calls. Crystal controlled. Bypass/Off switch allows transmitting (up to 5 watts). Use AAA battery. 2 1/4x1 1/2x1 1/2 in. BNC connectors.



MFJ-313

MFJ/BENCHER KEYER COMBO


MFJ-422
\$119.95



The best of all CW worlds—a deluxe MFJ Keyer in a compact configuration that fits right on the Bencher iambic paddle! MFJ Keyer—small in size, big in features. Curtis 8044-B IC, adjustable weight and tone, front panel volume and speed controls (8-50 WPM). Built-in dot-dash memories. Speaker, sidetone, and push button selection of semi-automatic/tune or automatic modes. Solid state keying. Bencher paddle is fully adjustable; heavy steel base with non-skid feet. Uses 9 V battery or 110 VAC with optional adapter, MFJ-1305, \$9.95.

VHF SWR/WATTMETER

MFJ-812 **\$29.95**

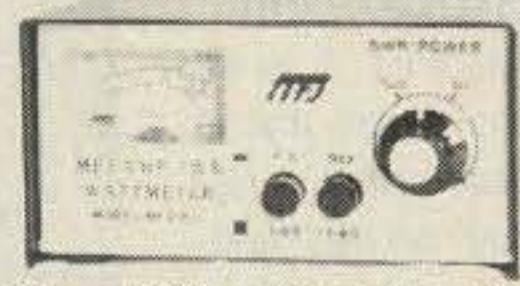

Low cost VHF SWR/Wattmeter! Read SWR (14 to 170 MHz) and forward/reflected power at 2 meters. Has 30 and 300 watts scales. Also read relative field strength. 4x2x3 in.

1 KW DUMMY LOAD

MFJ-250 **\$39.95**

Tune up fast, extend life of finals, reduce QRM!

Rated 1KW CW or 2KW PEP for 10 minutes. Half rating for 20 minutes, continuous at 200 W CW, 400 W PEP. VSWR under 1.2 to 30 MHz, 1.5 to 300 MHz. Oil contains no PCB.

50 ohm non-inductive resistor. Safety vent. Carrying handle. 7 1/2x6 3/4 in.



24/12 HOUR CLOCK / ID TIMER

MFJ-106

\$19.95 NEW



Switch to 24 hour UTC or 12 hour format!

Battery backup maintains time during power outage. ID timer alerts every 9 minutes after reset. Red LED .6 inch digits. Synchronizable with WWV. Alarm with snooze function. Minute set, hour set switches. Time set switch prevents mis-setting. Power out, alarm on indicators. Gray and black cabinet. 5x2x3 inches. 110 VAC, 60 Hz.

DUAL TUNABLE SSB/CW/RTTY FILTER

MFJ-752B **\$99.95**



Dual filters give unmatched performance!

The primary filter lets you peak, notch, low pass or high pass with extra steep skirts. Auxiliary filter gives 70 db notch, 40 Hz peak. Both filters tune from 300 to 3000 Hz with variable bandwidth from 40 Hz to nearly flat. Constant output as bandwidth is varied; linear frequency control. Switchable noise limiter for impulse noise. Simulated stereo sound for CW lets ears and mind reject QRM. Inputs for 2 rigs. Plugs into phone jack. Two watts for speaker. Off bypasses filter. 9-18 VDC or 110 VAC with optional adapter, MFJ-1312, \$9.95.

ORDER ANY PRODUCT FROM MFJ AND TRY IT—NO OBLIGATION. IF NOT SATISFIED, RETURN WITHIN 30 DAYS FOR PROMPT REFUND (less shipping).

- One year unconditional guarantee • Made in USA
- Add \$5.00 each shipping/handling • Call or write for free catalog, over 100 products.

for free catalog, over 100 products.

MFJ

MFJ ENTERPRISES, INC.
Box 494, Mississippi State, MS 39762

TO ORDER OR FOR YOUR NEAREST DEALER, CALL TOLL-FREE

800-647-1800. Call 601-323-5869

in Miss. and outside continental USA
Telex 53-4590 MFJ STKV





CYPRUS

Aris Kaponides 5B4JE
PO Box 1723
Limassol
Cyprus

Cyprus on paper seems to have a very large number of amateurs compared to its population. There are nearly 500 licenses to a population of about 650,000, but unfortunately the really active amateurs on the HF bands are not more than a dozen. Most amateurs are on VHF or they gave up the hobby, changing to another one. There is, however, an encouraging factor. During the last radio amateur examinations quite a few young people got callsigns. Some of them are harmonics of old amateurs, one of them being my second harmonic, John 5B4TZ, who is going to operate on HF regularly.

Catching you up with news of Cyprus: In 1985 was the 25th anniversary of the Cyprus Republic, and Cyprus amateurs were given the special prefix of 5B25 for use between August 17th and December 31st. This gave the chance for many amateurs to work this prefix and the 5B4 activity was increased at the same time. Unfortunately no award was programmed for the occasion, but the old Cyprus Award is still available.

Some of the specialized modes have started to be in use by Cyprus hams. On RTTY-Baudot we have (5B4)OK, OA, OP, NA, NG, IT, MC, and MD in Nicosia, JE, OV, and CV in Limassol, and CR in Larnaca City. On AMTOR, we have in Nicosia MD, OA, OK, FN, and IT. They are still experimenting and also use auto-AMTOR.

The master of satellite communications is undoubtedly Akis 5B4OA, who is QRV regularly on OSCAR-10. Others active on satellites are Spyros 5B4MF and Andreas 5B4LP, who operate from their school club station, 5B4ES.

On SSTV we have Nicos 5B4CV as our number one, and (5B4) HF, OA, MD, and OK.

On the VHF scene we have Andreas 5B4LP, who is the only one operating meteor scatter, and in 1985 he had fine contacts with UB5 and 9H1. On sporadic E, 5B4 hams had successes with LZ, YU,



Peter G4UIK operating from 5B4JE's shack as G4UIK/5B4.

SP, HG, UB5, and I. During the recent June sporadic E opening, Nick 5B4AZ, using only a handheld and 1/4-wave telescopic whip on his FT-290, worked about ten stations from Italy.

On tropo during the summer, contacts are quite easy between 5B4 and all the neighboring Middle East countries. All Israeli repeaters can be accessed and also the Amman repeater in Jordan sometimes. Simplex QSOs are also made with OD, 4X, JY, SU, SV5, and SV9 lands.


Although contesting in Cyprus is not so popular with the majority of amateurs, regular participants in various contests include 5B4MF, 5B4LP, 5B4DN, 5B4NC, and 5B4ES. Their results were very good, and at the last annual General Meeting of the Cyprus Amateur Radio Society, Spyros 5B4MF and Andreas 5B4LP were awarded honorary plaques in recognition of their activity and promotion of the hobby.

During the past few months many foreign amateurs have visited the Island and met many local amateurs. Mike A71AD came in May and has now settled in Nicosia, operating with the call 5B4TI. Also visiting Nicosia, SV5RW and OH8MA. In my own shack this summer, I had Jim GM4HKW, Peter G4UIK, Rudi DJ0MAF, Alecos SV2QO, Peter OH1RY, and Amir 4X6TT. It is always a pleasure to meet hams from other countries, and if anyone is visiting Cyprus, do not hesitate to contact 5B4 hams.

ZC4 activity is regular, especially on CW. From Akrotiri base, the most active is Adrian ZC4AP, and from the Dhekelia base, ZC4MR and ZC4EE. In the very near future the Episcopi club station, ZC4EPI, will be operational, and the secretary, ZC4DA, informed me that 5B4 amateurs of the Li-

massol Group will be allowed to operate from their club station as associate members. So I hope that I will be operating myself from there as ZC4EPI and enjoy the pileup.

Last item is the announcement of the operation of a new club station in Limassol, 5B4BBC. It was founded by the ham employees of the BBC relay station in Cyprus, and its first president is Andy Matheson 5B4DN, who also is ZC4AM.

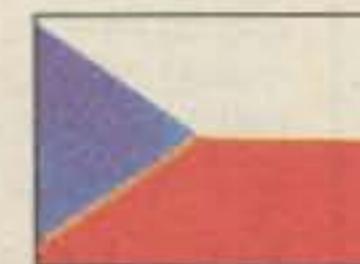

CZECHOSLOVAKIA

Rudolf Karaba (OK3KFO ARC)
Gogol'ova 1882 955 01
Topol'cany
Czechoslovakia

As this is being written, all four semifinalists in the U.S. Open Tennis Tournament are Czechoslovakian. It seems safe to predict that the men's and women's champions will be Czechoslovakian! Congratulations, Czechoslovakia!

Czechoslovak radio hams sincerely invite American hams to take part in our OK-DX Contest;



Ferdo OK3CXW DXing on 80-meter SSB.

the general level of the contest will be raised by your participation. It is scheduled for November 8-9, Saturday and Sunday, 12 o'clock to 12 o'clock UTC (being the usual 2nd November weekend). 1.8-28 MHz on CW/SSB. Contacts OK on same band for CW and SSB. CW: on 20 and 80, use the 3.500-3.560 and 14.000-14.060 windows for CW; SSB on all frequencies. Band changes only after a 10-minute minimum on one band.

Three points for contacts with OK and OK4/MM stations, one point for other contacts (except no points within your own country). Multipliers are zones according to the ITU list, on each band separately. Total score: all contact points times all multipliers. Categories: single operator, single band; single operator, all bands; multi-operator, multi-bands.

Send logs in usual way, reports and ITU zone, before the end of November, to Central Radioclub, PO Box 68, 113 27 Praha 1, Czechoslovakia.



EL SALVADOR

Marco A. Orellana YS1OD
PO Box 464
Calle Progreso 3332
San Salvador
El Salvador

Welcome to YS1OD! More from him in the future, but in the meanwhile he wants us to know...

I'll be glad to be [the El Salvador correspondent] and help any ham who has interest in visiting El Salvador for a short, medium, or a long period, as visitor or temporary resident. In case some DXpedition wants to operate from this country, I will like to have all the information at least 60 days in advance in order to do all the paperwork for the government and also to get prepared to welcome them.

We have two QSL Bureaus: Radio Club YSDX, PO Box 05-43, Metrocenter, San Salvador, El Salvador, and CRAS QSL Bureau, PO Box 517, San Salvador, El Salvador.

If any ham needs information about how he can operate here, he can contact me at the above address; telephones: direct international dialing: (503) 23-8183 or (503) 24-3954.

Uncle Ben says...

"I give you much more than just the lowest price..."

When you get that exciting new piece of equipment *from me*, you know you are going to be completely happy... I see to it, personally! I also give you earliest delivery, greatest trade-in allowances, my friendly assistance in every possible way.

Just ask any of the many thousands of hams all over the world who have been enjoying my friendly good service for over a half a century.

73, Uncle Ben, W2SOH



"Uncle Ben" Snyder, W2SOH
the head man of

HARRISON

"HAM HEADQUARTERS,
USA®" ...Since 1925!

- **CALL ME...**

(516) 293-7995

HARRISON
HAS THEM ALL!

KENWOOD



Kenwood TM-2570A



Kenwood TS-940S



Kenwood TS-440S



Kenwood TR-2600, TR-3600




Kenwood TS-711A (2m)
TS-811A (70 cm)



HARRISON RADIO
...Since 1925!

"HAM HEADQUARTERS, USA"
2263 Route 110 (at Smith St.)
E. Farmingdale, NY 11735
1-(516) 293-7995

v 94

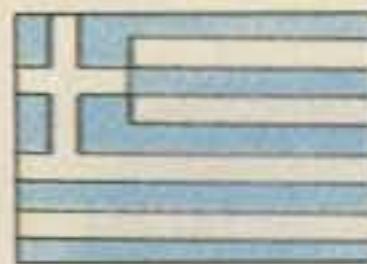

GREECE

Manos Darkadakis SV1IW
Box 23051
Athens 11210
Greece

In my column last January, I have told you of some of the problems we often have with illegal operations from Mt. Athos. Now I am going to tell the legend of Mr. Frank Turek DL7FT and his efforts to put this rare country on the air.

This year, as in 1985, he wasn't even inside Mt. Athos territory but operated from somewhere outside, as usual. Of course he says always that he was inside and that he had a license for that and all those good things to hear, but the truth is rather different. He never had and never will have a license other than the "Diamoneterion" (staying permit) which says one may visit and be in the monasteries for religious purposes only—and he may not even have had that since you don't need it if you never go inside Mt. Athos.

Last year we made a protest to the German PTT. This year we are going to have reciprocal agreements between West Germany and Greece reconsidered.

We remind you that the law covering amateur radio operation in our country for Greeks and foreigners clearly states: in order to get permission for amateur radio transmissions from the Holy Mountain, the applicant needs a written permit from the Holy Community of Mt. Athos as well. (From Legislative Decree 271 of 30/April/76—Official Gazette 102/B.) Furthermore, we strongly believe that certain rules have to be obeyed when somebody is participating in the DXCC Award (paragraph 12 covering operating ethics).

Mr. Turek went also a little bit further this year. He tried to throw mud on our operation back in

GREEK DEMOCRACY
MINISTRY OF TRANSPORT AND COMMUNICATIONS
DEPARTMENT OF POST AND COMMUNICATIONS

POSTAL ADDRESS : 49, SYNGHOU AVE.
POSTAL CODE : 11780 ATHENS
FOR INFORMATION: MR. N. CHRISTOPOULOS
TEL : 923.2906

ATHENS 24/4/86

Ref. No. : 58869

Degree of priority : VERY - URGENT

TO:
The Security Dept. of Rhodes,
85100 RHODES
NOTIFICATION TO : Radio Amateur
Association of Greece,
P.O.BOX 3564 Athens 10210

MATTER IN HAND : REVOCATION OF TEMPORARY LICENCE FOR OPERATING AMATEUR RADIO STATION.

We acknowledge that in our letter (ref. no. 52352/29-1-86) which was also sent to your office we granted a temporary licence for possession and operation of an amateur radio station to the German radio amateur Mr. FRANK TUREK.

Since the aforementioned, in accord with a written report made by the Radio Amateur Association Of Greece, exhibited wrongful behaviour toward the Spirit of Amateur Radio violating even the current regulations (such as using a false call-sign, a phoney declaration that he was transmitting from Mt. Athos which is forbidden, making sarcastic and derisory remarks to Greek Amateurs etc.) Our Department revokes his licence which it had granted.

Therefore, since Mr. Turek in his application said that from 3rd to 25th May he would be in RHODES, we request that you locate him to take away his licence for possession and operation of his amateur radio station (ref. no. 52352/29-1-86) and to seal up his radio equipment which is an ICOM transceiver model IC-730 serial no. 06027, so that he will not be able to use it until his departure from Greece.

Our Department will at the same time notify the corresponding German Ministry.

The Supervisor of Ministry Of Transport and Communications

S. BARABOUTIS

Fig. 1. The revocation notification.

1980 (SV1DC/SV1IW/SV1JG), saying he had proof that we were operating from a hotel... but he didn't care! (What a big heart he has!) The least we can do is to show our pictures: one of the "the hotel" with the 12AVQ on top of it, and one of SV1DC's head popping up through "the hotel's" roof!

The story goes on with DL7FT in SV5 for a new expedition from May 3 to 25. He announced it as mostly to give a new one to the Japanese. He also promises to go again to Mt. Athos after SV5 in order to take care of those unlucky ones who missed him the first time.

On the other hand, the RAAG (the Greek association) received a letter from our PTT stating that the license of Mr. Turek has been revoked as of April 24, 1986 (see Fig. 1). The reasons are clearly stated. The police then began looking for him on Rhodes in order to stop his activities, but he couldn't be found anywhere. Meanwhile he continued running his expedition despite the fact that

three Greek and some German operators told him to stop because of the PTT decision.

To make a long story short, DL7FT was found on May 21 at the Ramira Hotel on the island of Cos, the second most populated among the twelve Dodecanese islands. You see, he got his license for Rhodes but went on to Cos... you may imagine why.

His operation was stopped and his radio was sealed and kept at the airport customs office to be given back to him at his departure from the country.

And now the grand finale! During a conversation with Don Search, Don told me that DL7FT had provided him with all necessary papers including a Mt. Athos one just like the one I had in 1980 for my trip! Since all papers arriving at the DXCC desk are treated as confidential, Don couldn't do


more than provide me with permit numbers and dates.

A letter was forwarded to a friend of mine in Mt. Athos the next morning with all the details in it, and a few days later the matter was revealed. The Mt. Athos community had never issued such a license, Mr. Turek was unknown, and most important, the protocol number did not match with those issued by the community.

I leave the conclusions to you. Not hard to guess.

Common sense now says that it will be even more difficult to get a written permit for Mt. Athos again after all these sad events. We hope we will not have to face the unhappy situation of seeing Mt. Athos among the deleted countries. We believe we should have nothing more to do with DL7FT's operations; we regret that a DXCC Honor Roll holder should have provided such an example to younger DXers—making the DXCC certificate look like a piece of worthless rubbish.

By the way, I will be glad to forward any documents to anyone who would like to look at them. Please do not bother the editors of 73 but send your request, if any, to me direct.

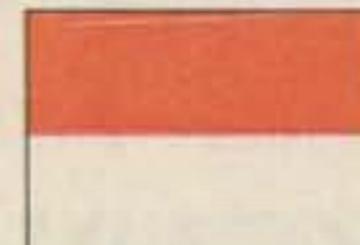

INDONESIA

Erlangga Suryadarma YB0BZZ/V85BZ
ORARI National QSL Bureau
PO Box 96
Jakarta 10002
Indonesia

August and September report by
YB0BZZ and Ben S. Samsu
YB0EBS.

The International Beacon Proj-



The erected antenna at Mt. Athos, 1980.

Or This Inexpensive It Really Shouldn't Be This Easy

Remember just a few years ago, how it took a roomful of equipment just to work RTTY. And if you wanted more than one mode it took a dedicated computer system costing thousands of dollars. The new AEA Pakratts are proving it doesn't take lots of equipment or money to enjoy working all bands in five different modes.

First, A Good Idea

The idea behind the Pakratt is very simple. One controller that does Morse, Baudot, ASCII, AMTOR, and Packet, and works both HF and VHF bands. Of course the decoding, protocol, and signal processing software must be included in the unit, and connection to the computer and transceiver have to be easy. The unit also has to be small and require only 12 volts, so it will work both in the shack and on the road.

Second, Computer Compatible

It doesn't matter what kind of computer you have, we have a Pakratt for you. The PK-64 works with the popular Commodore 64 or 128, and the PK-232 works with any other computer or terminal that has an RS-232 serial port. The PK-64 doesn't require any additional programs. Simply connect to the computer and transceiver and you're on the air. The PK-232 needs a terminal or modem program for your computer. The one you're using with your telephone modem will work just fine.

Fourth, AEA Quality and Price

Not many manufacturers like to discuss quality and price at the same time. AEA thinks you want high quality and low price in any product you buy, so that's what you get with the Pakratts. Ask any friend who owns AEA gear about our quality. The people who buy our products are our best salespeople. As for price, the PK-64 costs \$219.95, or \$319.95 with the HF option. The PK-64A, an enhanced software unit with a longer flexible computer cable, costs \$269.95 or \$369.95 with the HF option. The PK-232 costs \$319.95 with the HF modem included. All prices are Amateur Net and available from your favorite amateur radio dealer. For more information contact your local dealer or AEA.

PAKRATT™ Model PK-64



PAKRATT™ Model PK-232

Third, Performance and Features

The real measure of any data controller is what kind of on-air performance it gives. While the PK-64 and PK-232 use different types of modems, both give excellent performance on VHF. The optional HF modem of the PK-64 uses independent four-pole Chebyshev filters for both Mark and Space tones, and A.M. detection. The HF option can be factory or field installed.

The PK-232 uses an eight-pole bandpass filter followed by a limiter discriminator with automatic threshold correction. The internal modem automatically selects the filter parameters, CW Fc = 800 Hz, BW = 200 Hz; HF Fc = 2210 Hz, BW = 450 Hz; VHF Fc = 1700 Hz, BW = 2600 Hz.

The PK-64 uses on screen indicators to show status, mode, and DCD (Data Carrier Detect) while the PK-232 uses front panel indicators. Both units use discriminator style tuning for HF operation. And that's just the tip of the iceberg. Features like multiple connects on packet, hardware HDLC, CW speed tracking, and other standard AEA software features are included in both the PK-64 and PK-232.

Prices and specifications subject to change without notice or obligation.

v65

Advanced Electronic Applications, Inc.
P.O. Box C-2160, Lynnwood, WA 98036-0918
206-775-7373 Telex 6972496 AEA INTL UW

AEA

ect (IBP) has not been considered by ORARI [Organisasi Amatir Radio Indonesia] at the present time. However, realizing that the present established IBPs in IARU Regions I, II, and III are well spread geographically [and] Indonesia is strategically situated at the intersection of two major continents and two major oceans [it] is also a "mid-point" [and a] suitable location. Should there be any plan within the IARU Region III association in this matter, ORARI will highly extend its support and cooperation.

[ORARI plans to add to its calendar of annual events an International QRP Day, probably on June 17 since that is the day so proclaimed in IARU Region I. This is because of the new feeling of "the bigger the better" resulting from the increase of imported equipment and bigger antennas and bigger power.]

It is the opinion of ORARI that whilst some of the world contests such as CQ WW have a very strong foothold in the world amateur activity, it is of great pity that the one and only World Amateur Radio Day was not celebrated by all amateurs accordingly. ORARI wishes to appeal that this special day should be programmed... as the most important and greatest event, and all IARU society members [think of themselves as] obliged to participate.

ORARI wishes to support the establishment of a common frequency preserved primarily for DX requirements which in no condition except for emergency communications will be utilized for local communication. This will preserve also the segment for DX contest purposes, as, at present, it tends to be fully blocked by local communications in that segment. Example of this is the usage of DX-window segment in the 80-meter band.

This report will conclude next time with a section on the new band plan.



ISRAEL

Ron Gang 4Z4MK
Kibbutz Urim
Negev M.P.O. 85530
Israel

FLASH!

Easter in the Holy Land with

the Holon-Bat-Yam Club! [You can be there!] In the last edition of this column I reported on the week-long 4X5J operation of the Holon-Bat-Yam radio club, ending my comments by stating that I didn't know what they had up their collective sleeve for the coming year. Since then, the dust has cleared and it has become evident that they really intend to outdo themselves for this coming spring. Thus, I have the pleasure of announcing to the readers of 73 their project, which will consist of the simultaneous operation of five stations bearing special callsigns, from five separate locations: Bethlehem, Jerusalem, Nazareth, Mount Tabor, and the Mount of Beatitudes (above Capernaum on the Sea of Galilee). The operation is to take place from the 23rd through the 30th of April.

In order to man these stations around the clock, the club is looking for 50 or more overseas radio amateurs, who are invited to come with their families, who will take turns operating the stations, and will be sightseeing on their days off. Operators should be experienced in handling pileups and preferably should know how to make QSOs in a few languages. Those interested in this combination of holiday and hamming should write to Aharon Kirschner 4X4AT, HaRakefet 17, 58204 Holon, Israel.

As with the Holon-Bat-Yam Club's 4X5DS (Dead Sea) and 4X5J (Jerusalem Old City) operations, special QSLs and certificates will be sent free of charge to those making contact with the Easter-1987-In-The-Holy-Land stations.



ITALY

Manuel F. Calero I4CMF
Manager, IARS Reciprocal
Licensing Unit
Via Giorgione, 16 I-40133
Bologna
Italy

Herewith additional information from the IARS [International Amateur Radio Service]; see 73 International for July, 1986, also. The IARS was founded as a private, nonprofit organization by I4CMF and I4OCS for the aim "of promoting friendly relations between radio amateurs throughout

the world by assisting in negotiating reciprocal licensing agreements between Italy and other countries." The organization "considers the six universally recognized and accepted articles of the Ham Radio Code [Paul M. Segal—see any edition of the ARRL Handbook] to be the guideline for their activity, with mutual respect for each person's rights and duties."

The latest country with which Italy has reached a reciprocal licensing agreement "is the 'oldest' and 'noble' Republic of San Marino, very well known also as 'Monte Titano' (Mount Titan), from the name of the main peak of the land. We are very happy to give you this news because this agreement is the first one that our 'small' neighbor has reached in its history of radio amateurs."

Eighteen other countries have such agreements with Italy. The IARS emphasizes the need to observe all "bureaucratic formalities which, unfortunately, continue to exist because each country still continues to carry along its own set of regulations. However, it is hoped that with the institution of the 'European' license, promoted by C.E.P.T., free circulation rights will be granted to European ham operators. This objective is a particularly important one which IARS is committed to and which it is counting on achieving soon. The goodwill and desire to work towards a goal which will bring OMs throughout the world a little closer together, with no distinction of race, nationality, or creed, is certainly NOT lacking!"



ZAMBIA

Daniel E. Soko 9J2DS
PO Box 71831
Ndola
Zambia

Welcome, 9J2DS, Secretary and Awards Manager for the Radio Society of Zambia. We will be pleased to hear more from you not only about Zambia but your neighbors also: Tanzania, Malawi, Mozambique, Zimbabwe, Namibia, and Angola, and even more distant neighbors in southern Africa.

At present, Zambia has 30 licenced radio amateurs, although

about ten would be considered very active. The Radio Society runs a weekly net on 3.645 MHz every Friday at 1900 UTC. A rough check on Tuesdays at 1730 UTC on the same frequency may reveal a bit of activity as well.

Any ham is welcome to 9J2-land, and it would be helpful to all if you would send a photocopy of your licence well in advance to make arrangements for a possible temporary licence. Send it to me as Secretary of the Radio Society of Zambia at our headquarters and QSL Bureau: PO Box 20332, Kitwe, Zambia.

This year alone we were privileged to see Lloyd and Iris Colvin, W6KG and W6QL, for a short while. Lloyd was given the call 9J2LC, and Iris, 9J2IC. The couple operated mainly from their hotel room in Lusaka using their own equipment.

Soon after, a visit was made by Dilip 5Z4MR, who was issued 9J2DRT. He also qualified for the WZA after contacting ten stations within Zambia. Special callsigns are issued from time to time mainly on application to the licensing authorities.

Only five have 2m rigs and they are scattered about. A lot of interest is shown for 144-MHz operation, but finding equipment is a big hindrance. The five have thought of a repeater or two, but the same problem of equipment is manifested. Any kinds of donation in the form of kits for repeaters and actual 144-MHz rigs which may be obsolete, from other hams, but still in good working order would be a great step.... [What have you or your club to give? Let 73 International know about any donations! With photographs if possible.]

Hams are permitted to operate mobile as well. Third-party traffic, however, unfortunately cannot be discussed.

The WZA certificate may be won as follows: 9J2 stations contacted on 7, 14, 21, and 28 MHz count one point; on 10, 18, and 24 MHz, two points; and on 1, 8, and 3.5 MHz, three points. Special prefixes count two points. Same stations contacted again on other bands count again. Zones 36, 37, and 38 need 20 points for the award; all others need 10. The award is available to SWLs; there are separate classes for AM, CW, SSB, and mixed. Send certified copies of logs to Awards Manager with 10 IRCs, 50 pence, or US\$1.

Let us hear from you! 73, Daniel. ■

ege, inc.

DISCOUNTS FOR AMATEURS

**Orders & Quotes Toll
Free: 800-336-4799**

(In Virginia: 800-572-4201)

Information & Service: (703) 643-1063

Service Department: (703) 494-8750

13646 Jefferson Davis Highway

Woodbridge, Virginia 22191

Store Hours: MTT: 10 am-6 pm

WF: 10 am-8 pm

Sat: 10 am-4 pm

Order Hours: M-F 9 am-7 pm

Sat 10 am-4 pm

Visit Our New England Store

8 Stiles Road

Salem, New Hampshire 03079

New Hampshire Orders,*

Information & Service: (603) 898-3750

New England Orders: 800-237-0047

NEW Store Hours:

MTWSat: 10 am-4 pm

ThF: 12 noon-8 pm

Sun: Closed

*Order and we'll credit you with \$1 for the call.



Our Associate Store:
Lacombe Distributors
Davis & Jackson Road, P.O. Box 293
Lacombe, Louisiana 70445
Information & Service: (504) 882-5355

Terms: No personal checks accepted. Prices do not include shipping. UPS COD fee: \$2.35 per package. Prices subject to change without notice or obligation. Products are not sold for evaluation. Authorized returns are subject to a 15% restocking and handling fee and credit will be issued for use on your next purchase. EGE supports the manufacturers' warranties. To get a copy of a warranty prior to purchase, call customer service at 703-643-1063 and it will be furnished at no cost.

**Much More in stock!
Send \$1 for our
New Fall Buyer's
Guide-Catalog.**

More Helpers

- Marine radios by Icom
- Commercial Land Mobile by Yaesu
- Telephones by AT&T, Cobra, Southwestern Bell, & Panasonic
- CBs by Uniden, Midland, Cobra
- Radar Detectors by Uniden, Cobra and Whistler

**Plan Ahead!
Order Early
For Christmas**

Antennas

HF, VHF, SWL, scanner, marine, & commercial for Mobile or Base.

Cushcraft

Mini-Products • Larsen
B&W • Van Gorden
Butternut • KLM
Mosley • Hustler
Telex Hy-Gain

Towers

Unarco-Rohn, Hy-Gain, Tri-Ex
Ask for special quotes on package deals including cable, guys, connectors, turnbuckles, etc.

Accessories

Phillystran
Kenpro • Alliance
B&W • Telex Hy-Gain
Daiwa • MFJ
Bencher • Amphenol
Astron • Welz
B+K Precision

Amplifiers

Diawa • Ameritron
Amp Supply • Vocom
TE Systems
Tokyo Hy-Power

Computer Stuff

Packet Radio
Hardware and Software
for RTTY/Morse
Hal • Kantronics
Microlog • MFJ
Ham Data Amateur Software.

Shortwave

Sony
Panasonic
Yaesu
Kenwood
Icom

Scanners

Uniden/Bearcat
Regency

More Radios

Encomm/Santec
KDK
Ten-Tec

YAESU

NEW FT-23

Mini handheld for 2m. 2.5 W output.
10 memories. LCD digital display.



NEW FT-767GX

All-mode transceiver. Cat system.

FT-757GX


HF XCVR/Gen. Coverage Receiver.

NEW FT-727G

Dual-band handheld for 2m/440 MHz

NEW SOFTWARE

GX Turbo and Catpack for the FT-757GX and Catpack for the FRG-9600

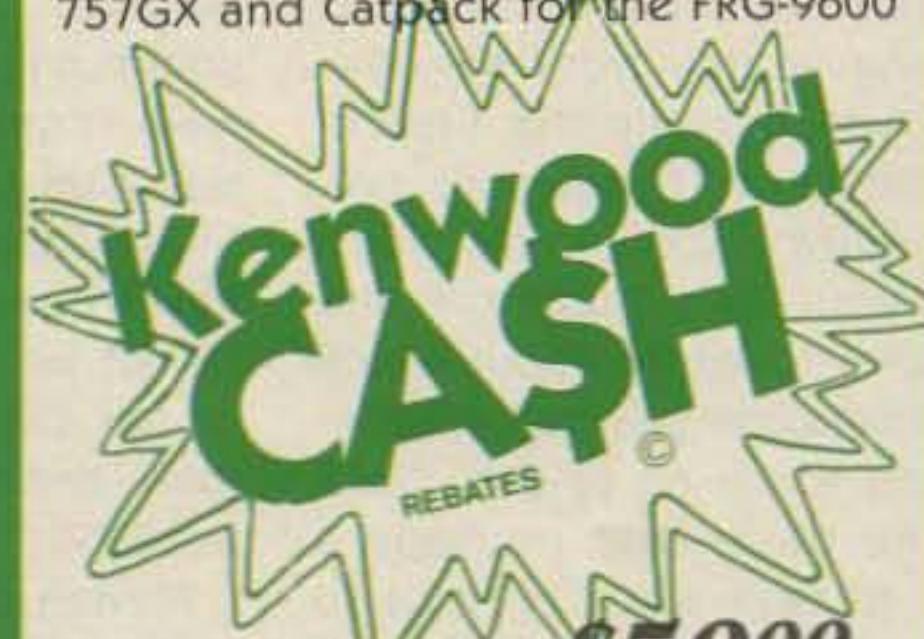

TS-440S \$50.00

TM-2570A \$40.00

TS-430S \$25.00

TR-2600A/3600A \$15.00

TH-21AT/31AT/41AT \$10.00

OFFER EXTENDED
THRU NOVEMBER 15, 1986.



IC-735

Compact HF Transceiver

IC-751A

HF XCVR/General Coverage Receiver.

VHF/UHF

2m- 27A, 27H, 271A, 271H

220 MHz- 37A

440 MHz- 471A, 471H, 47A

IC-02AT, 04AT

Small, light HTs for 2m or 440 MHz. 10 memories and scan functions.



IC-A2 in stock
Aircraft handheld

IC-2AT, 3AT, 4AT, 12AT

Handhelds for 2m, 220 MHz, 440 MHz, 1.2 GHz

**Ask for Package
Quotes on
Radios/Accessories
& Antennas/Towers**

NEVER SAY DIE

from page 62

My recommendation for getting into your own business is to either start at home in a small way and learn so your mistakes won't blow your cash reserves—or learn on someone else's money. Just about every entrepreneur eventually needs help as his business grows, providing you with exactly the learning experience you need—just not at your expense.

If you don't blow your best learning years—from 45–65—when you get into the time of life that larger businesses normally throw you out to die, you'll have your own business and not have to worry about which ham magazine you can afford—or even which rig to get. You'll get the best—and perhaps a spare to take along on trips to Africa the way Lloyd and Iris Colvin do.

Then, when I ask in an editorial who's interested in going down to

some obscure Caribbean island with me for a few days of instant DXing, I'll get an enthusiastic letter from you. The fact is I'm writing this editorial while sitting on the beach on Cayman Brac, a tiny island south of Cuba. It's skin diving heaven, so I've been here taking underwater pictures of the beautiful reefs.

Now here's an island which is easy to reach—has very nice hotels and great food—wonderful skin diving—is surprisingly inexpensive... what a great spot for a continuing DXpedition! What I have in mind is setting up a first-rate ham station for you to time-share—like a condominium. I haven't priced everything out, but I'll bet we could offer three days of hot DXing, including hotel, food, and transportation, for under \$750.

Having done a good deal of DXpeditioning, I can assure you it's an experience you'll never forget. The Caribbean is an ideal spot, too, because it's easy to get to—

there are nice hotels (beats the heck out of tents)—licensing is easy—the weather is usually excellent—transportation is convenient—it's close by—and, best of all, the propagation into the U.S. is first rate.

DXing from Lesotho (my call there: 7P8CA), for example, has its drawbacks—like taking a long time to get there—costing a bundle—and then, once you're there and on the air, you don't hear much. Really a great combination.

Speaking of entrepreneurialism, *Insight* magazine had quite an article on the problems American Indians have been having. It seems they, like the blacks, have a culture which does not encourage entrepreneurs, with the result that the Indians are gradually losing everything. They're poor as a group and staying that way.

Our educational system generally supports this lack of prestige for business people. College, in particular, aims at preparing graduates to work in large businesses, for the government, or for teaching. If you think about it, you'll recognize that these are the three best career paths to never make

any serious money. College seniors are besieged by recruiting teams from our large corporations—a kind of feeding frenzy takes place which sweeps most graduates into these virtually dead-end career paths.

A couple times during my life I came close to working for the government. After WWII ended I was teaching electronics at the submarine base in New London. When it came time for my release from involuntary servitude I was anxious to get the hell out. I'd risen to a first-class electronic technician. During the war the Navy had refused to let any of the ETs sign on as regular Navy, so suddenly they found themselves losing the people they needed the most. I was offered a Lt. Commander's rank if I'd stay in and teach. I might have stayed if they'd upped it to Captain. Close call!

Another time, after I'd gotten absolutely fed up with being a television director, I applied for a GS engineering position. By the time they got around to accepting me, better judgment had fortunately taken over. That's when I made my first big entrepreneurial leap, starting a loud-

COLORADO COMM CENTER

KENWOOD



TR-2600

2.5W/300MW (switchable) 2 Meter hand held transceiver
• LCD Readout
• 10 Memories with Lithium Back-up
• Band and Memory Scan



TH-21AT

Compact Pocket Size
• 1 Watt
• Opt. 500 M.A. Battery

TM-2570



• First 70 Watt FM Mobile • First with Memory & Autodialer • 23 Channel Memory • Front Panel Programmable CTCSS



TS-940S
"DX-cellence"

• Programmable Scanning
• High Stability Dual Digital VFO's
• 40 Channel Memory
• General Coverage Receiver

800-227-7373

- AEA
- ALINCO
- ASTRON
- AVANTI
- B&W
- BENCHER
- BUTTERNUT
- CUSHCRAFT
- DAIWA
- HAM-KEY
- HUSTLER
- HYGAIN
- ICOM
- KANTRONICS
- KDK
- KENPRO
- KENWOOD
- KLM
- LARSEN
- MFJ
- MIRAGE
- NYE VIKING
- QUATRON
- SANTEC
- WELZ
- YAESU

COD'S WELCOME

YAESU



FT-209RH

• 5 Watts
• 10 Memories
• LCD
• Compact


FT-2700R

• Duo-Band Full Duplex
• 25 Watt



FRG-9600

• 100 Memories
• 60 MHZ - 905 MHZ Continuous



525 East 70th Avenue, 1 West, Denver, CO • 80229 • 303-288-7373

NEW

Frequency standard upgrades your counter

Get the precision you paid for from your frequency counter. Connect the Counter-Mate to the "EXT STD" input or periodically check the internal oscillator to get traceable accuracy instead of just resolution.

The Counter-Mate frequency standard employs a precision third-overtone 10 MHz crystal in a proportionally controlled copper oven maintained at a computer optimized temperature. The excellent long-term and short-term stability is in a class with units costing much more.

Check the specifications—the Counter-Mate out-performs and is less expensive than most counters' oven oscillator options, it needs no installation, and it has sufficient drive to serve several instruments.

The Counter-Mate comes calibrated against national standards and you do not lose your counter when it is time to recalibrate! The unique 50-turn adjustor makes calibration easy and mechanically stable. Periodic calibration at Wenzel Associates is just \$15 plus shipping.

Wenzel Associates, Inc.

11124 Jollyville Road
Austin, TX 78759
(512) 345-2703 TWX 910-997-4554

ONLY
\$350



COUNTER-MATE SPECIFICATIONS

Model	CM-1
Frequency	1 MHz and 10 MHz
Output Drive	TTL and 50 Ohm
Rise & Fall Time	5 nsec
Aging Rate	<3x10 ⁻⁸ /Month
Temperature	<-5x10 ⁻⁸ ; 10° to 40° C
Setability	2x10 ⁻⁹ , 50 turns
Oven Warm-Up	10 minutes at 25° C
Power Requirements	9V Adapter included
Size	4.6" x 4.8" x 1.6"

v 164

speaker cabinet firm with a \$1,000 car loan.

I'd like to see our colleges include courses to help people become entrepreneurs. Small business is the strength of our country, so it should be encouraged and youngsters should get educations which help them in this direction. I'm no fan of big business. I've got a book written by a VP of GE called *Big Business, a Threat to Democracy*. He makes a very good case.

Big business is driven by quarterly business reports—so we see lobbyists in Washington protecting their interests—a general lack of regard for the environment or people. We see cigarette firms selling their proven killer drug to millions of helpless addicts. I watch with pain as the few nicotine drug addicts who work for me sneak out back of the building for their drug fix every hour.

Life is a gamble. Every day we gamble as we drive or even walk across the street. Yet I see people refusing to go to Europe on vacation because they don't want to gamble on being the target of a terrorist, yet who take a far, far greater gamble by smoking. Talk

about rolling with loaded dice! Cigarettes are just as deadly as Russian roulette—it's just a longer game. How soon will it hit is the question. Will it be cancer? Emphysema? A heart attack? Will the cancer be in the throat? Lungs? Intestines? Or will it be a stroke? Will you be hit before you reach 70? The odds are enormous that you will.

So we see big firms throwing every legal obstacle they can in the way of any government regulations which might slow down their polluting and poisoning. The alarms about the damage to our upper atmosphere are being verified—the result has been a stepping up of lobbying to prevent government action, not major efforts to develop chemicals which will not cause this apparently irreversible damage. So we continue to use spray cans—and produce millions of tons of refrigerant a year. The profits in the next quarter are a lot more important than what happens to the world in 50 years. Other than being needed to compete with other huge businesses from other countries, it's difficult to justify most big businesses.

Small business provides more

jobs, more wealth for the people, more innovation—and even pays more taxes. Of course small business doesn't offer quite the gambling opportunities we get with large corporations, with their stocks and bonds and our stock exchanges. And without our megabanks, how would Third World leaders ever get the billions for their Swiss accounts?

The compact disc business is growing rapidly. I've been visiting CD-only stores in recent months. Just about every one I've visited has been able to get into the black in three to five months—not bad for opening a new store. Entrepreneurs who keep a weather eye on technology have an edge. I'm in the process of changing my computer store chain into high-tech stores, adding telephones, compact discs, CD players, and a few other high-tech gadgets. If the 8mm video firms decide they're going to make a major effort, we'll add an 8mm department too.

There are opportunities at every turn for the entrepreneur. Every new technology opens opportunities for new products to be designed, manufactured and marketed. A thousand small out-

fits sprang up with TRS-80 support products a few years ago, with hundreds of them doing very, very well. That was before IBM outsmarted Radio Shack, taking advantage of the incredible Radio Shack blindness to the power of third-party support of their computers. Well, that blindness cost Radio Shack tens of billions—and gave IBM the microcomputer industry as a gift. So, instead of IBM having to put out a TRS-DOS computer, we see Radio Shack resigned to bringing out MS-DOS computers just to survive.

If we can get amateur radio growing again as a hobby and as a market, we'll need hundreds of new ham products—antennas, tuners, amplifiers, packet equipment—things which you might just be able to design and start making. In the meanwhile you might want to see what you can come up with for compact discs, for 8mm video, communications, security, or any of the other new high-tech fields. It can be any product, service—or even information.

You get too soon old and too late smart, as the saying goes—so the sooner you start thinking

in terms of being independent economically, the better. It's bad enough to work at a job all your life which doesn't allow you to splurge now and then, but then to face retirement with even less...? Imagine, having so little money that you have to pass up subscribing to a ham magazine you enjoy!

The early conditioning we get from our parents is important. My grandfather was an entrepreneur—made millions as an inventor in the 20s. He lost everything in the 1929 stock market crash, but that didn't faze him. He got right back into business again marketing a new type of indestructible brake lining invented by an uncle of his. My father was an entrepreneur—started the first transatlantic airline—so I had the right mind-set to be an entrepreneur. And that's important, as we can see from the black and American Indian experiences, where social priorities are keeping these groups from success.

BEING DISAGREEABLE

The theme at the 73 booth at hamfests for years has been, "I enjoy your editorials, but I don't

always agree with 'em.' Excuse me, but that's a cop out, so let's think this one out.

First, many more bureaucratically inclined readers have a problem with my whole way of writing. I'm amazed at how many words some writers use to communicate their ideas. Being of Yankee lineage, I tend to try to get across my ideas with as few words as possible. Yes, I know my editorials seem to go on endlessly, but—hey—take a closer look and you'll see I've covered a wide range of topics, none in any exhaustive detail.

Readers who are more used to writers who endlessly repeat themselves, rather than using my approach of just presenting almost an outline of the ideas, often have a problem. I've never been paid by the word, so I've never developed the redundancy system of writing to maximize my income with a minimum of ideas.

I'll tell you what. The next time you get the feeling that you're not agreeing 100% with what I'm writing, let's see if you're operating on the basis of my disturbing a belief of yours or if you actually have some data that I don't

which might lead me to different conclusions.

Now, if we're having a difference of belief—a religious difference, you might put it—let's remember what my grandmother used to say—a man convinced against his will is of the same opinion still. And on quite a few ham subjects we're as much up against religious fanaticism as are the Moslems vs. the Christians, the Moslems vs. the Jews, the Protestants vs. the Catholics, and so on. Like no-code, for instance, where the born-again agnostics are up against old-timer intransigence. Heh!

So, instead of taking the easy out of just not agreeing with me, let's see if there's really any substance to your disagreement. Let's see if you can articulate your objections. I suspect you'll find as you try to explain yourself that you are operating on some weak premises. You may begin to suspect that if I'd hammered my ideas home over and over again—preaching the sermon, so to speak—you might have agreed with me. Well, I don't. I try to put as much meat into what I write as I can, leaving out the fluff, fat, and overkill.

Now and then I've pinned down readers who claim they don't always agree with me. "Okay, name one thing I've written with which you don't agree." This often flusters people into generalities or sudden memory loss (SML). Instant amnesia. When a specific area of disagreement is cited, I appreciate it because I can then find out if I'm up against a religious conviction or a question of facts. If I am wrong about my facts I sure want to know. What usually happens is that my facts are a lot more solid—or I'm able to bring to light some of the background on why I wrote what I did.

You see, I have a psychological problem. I was brought up in a family where any vague statement was challenged, so I learned early on to do my homework or suffer the embarrassment of Being Wrong! The dictionary was whipped out at the slightest question about a word's meaning or pronunciation. This helped me build a larger than average vocabulary.

So let's bring this business out in the open. The next time you find yourself disagreeing with me about something, is it because

here is the next generation Repeater

MARK 4CR

No other repeaters or controllers match Mark 4 in capability and features. That's why Mark 4 is the performance leader at amateur and commercial repeater sites around the world. Only Mark 4 gives you Message Master™ real speech • voice readout of received signal strength, deviation, and frequency error • 4-channel receiver voting • clock time announcements and function control • 7-helical filter receiver • extensive phone patch functions. Unlike others, Mark 4 even includes power supply and a handsome cabinet.

Call or write for specifications on the repeater, controller, and receiver winners.

The **only** repeaters and controllers with **REAL SPEECH!**

Create messages just by talking. Speak any phrases or words in any languages or dialect and your own voice is stored instantly in solid-state memory. Perfect for emergency warnings, club news bulletins, and DX alerts. Create unique ID and tail messages, and the ultimate in a real speech user mailbox — only with a Mark 4.



MICRO CONTROL SPECIALTIES

Division of Kendecom Inc.

23 Elm Park, Groveland, MA 01834 (617) 372-3442

✓26

Kantronics UTU-XT

**NOW — for ANY computer,
the intelligent terminal unit
that can change its spots.**

Can you imagine a terminal unit (TU) that has user programmable parameters? Would you like to be able to vary the MARK and SPACE tones you use by computer control, save these parameters for next time, and be able to change the center frequency and bandwidth of the CW detector? All this can be done with the **Universal Terminal Unit-XT by Kantronics**.

Imagine a **CW/RTTY/ASCII/AMTOR** machine that operates with a TNC-like command structure, including **54 commands**. The UTU-XT does just that with a 6303 microcomputer, 2K of RAM, NOVRAM, and 128K of EPROM embedded inside.



UTU-XT is also compatible to any computer with an RS232 or TTL (C-64) serial port — the circuit is built in. This allows you the flexibility to change computers at any time.

UTU-XT operates CW from 6-99 WPM, RTTY from 45 to 300 baud, ASCII from 110 to 300 baud, and AMTOR modes A, B, and L. Selective RTTY and SELFEC are included.

Suggested retail \$359.95

 **Kantronics**

1202 E. 23rd Street (913) 842-7745
Lawrence, Kansas 66046

v100

you have some beliefs which I've disturbed or do you really think I'm working with poor information? If you've got data I don't, let's see what you've got.

I'll be glad when we're able to use our home computers to cross-index magazines and books. I've read around 6,000 books so far, plus perhaps 2,500 magazines a year, but, like everyone else, my retention of details is low. It would be nice to be able to quickly find the reference to a recent *Business Week* article on how much of a loss of income on the average we're going to have because the U.S. is changing to a service and sales economy instead of one based on manufacturing. I remember the general article, but time is gradually erasing the details.

Think how much more valuable magazines (and books) will be when we are able to easily search them with our computer for information. It'll be along, and when it comes I'll be one of the first users.

Speaking...no, writing about manufacturing going overseas, the new tax laws should substantially accelerate the movement of manufacturing to Asia—just what

we need. This will then tend to reduce our overall income by about 40%. You see, the new tax laws have increased the taxes on business. Now if we weren't up against foreign competition, we could just go the old route and say what the hell and raise prices to pay the increased taxes. But there are fewer and fewer industries where we aren't in price competition with imports, so increased taxes will mean we'll have to move the manufacturing to lower-wage countries if we're going to stay in business. I believe we'll see business fleeing America faster than ever.

Moving taxes from people to business may feel good, but it's pernicious. The Japanese don't tax their businesses, which may help to explain how they are able to be so incredibly competitive, even with the yen increasing in value.

This is going to put pressure on even the small businessman to find an Asian partner in order to keep his costs of manufacturing down. I'll bet I'll be seeing more and more businessmen on the October Asian consumer electronic show tours in the next two or three years.

You say you disagree? Okay . . . let me know where you think I'm wrong. I sure wish I were, but it looks to me as if Congress is at it again, waving in the winds of election fever—a 365-day-a-year plague in Washington.

Let's not play the old "I don't always agree with you" tune. If you're going to be disagreeable, then sit down and send me your facts. Or do I have to start doubling the length of my editorials just to bludgeon you with the details which resulted in my conclusions? Yes, I know everyone is lazy and I'm a damned nuisance when I make you think. Hey, no one is holding your eyelids open and forcing you to read my editorial—that's just self-inflicted torture, so stop being disagreeable about it.

BIG RIG NEEDS HOME

I've got just what you Big-Gun DXers in Southern California will love—a ten-kilowatt sideband rig someone wants to give away for free. Does that make your little heart go pitty-pat?

The rig is a model GPT-10K, made by The Technical Materiel Corporation in Mamaroneck, New York. It's not exactly a brand new

rig—manufactured in 1962—but it's a 2–28-MHz rig—imagine the fun you can have on 40m! Hey, no fair taking over WWV's channels, okay? This could make quite a dent on CB also, eh? Talk about real punch!

The rig is located in Southern California (naturally). It's a big mother—six-foot rack—must be near five feet wide—on wheels (whew!).


How to win it: The rig is available to any ham or ham club which can come up with a damned good reason for getting it. You'll have to go and get it—with a truck and some riggers. Write your rationalization for getting this rig on one page and send it to me. My decision (and that of the owner) will be final. No bribes, okay?

This rig, made for the Army, is built like all TMC gear, like a brick outhouse. It's a beaut! I remember their old GPR-90, the best HQ-129 ever built. TMC disappeared from the ham scene about the same time as everyone else, right after the Incentive Licensing disaster hit us. They sure did make fabulous radio equipment.

All that's needed to make this rig legal is a heavy shunt on the final plate meter. ■

TUBES

✓105

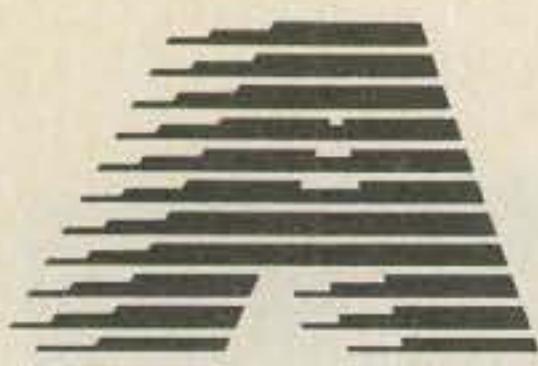

AERO ELECTRONICS
Electron Tubes for Industry
Toll Free (except CA)
(800) 421-4219
IN CALIFORNIA
(800) 556-6700

2129 Venice Boulevard Los Angeles California 90006 USA
Telephone (213) 737-7070 Telex 673565 Cable Aero LSA

EVERYTHING IN WIRE ANTENNA SYSTEMS: BEAMS, SLOPERS, LOOPS, VERTICALS

SEE WHAT WE'RE DOING WITH ANTIENNAS BALUNS ✓150

RADIO WORKS

ANTENNA KITS FROM \$9.95

LOW COST ENGINEERED MAX PERFORMANCE BALUNS THAT WORK

FROM ONLY 15.95 1.8 3.5 7 14 21 28

2.0
1.8
1.6
1.4
1.2
1.0

SASE FOR FREE 32 PAGE CATALOG JIM, W4THU (804) 484-0140 BOX 6159 PORTSMOUTH, VA 23703

ACCESSORIES: WIRE, COAX, INSULATORS, SWITCHES, 2M ANTENNAS, CONNECTORS

DEALER DIRECTORY

Fontana CA

Complete lines—ICOM, Mirage, KLM, Larsen, Astron, B & W. Over 4000 electronic products for the hobbyist. Also CB and business radios. Serving you from a 6000 sq. ft. store. **Fontana Electronics, 8628 Sierra Ave., Fontana CA 92335, 822-7710.**

San Jose CA

Bay Area's newest amateur radio store. New & used amateur radio sales & service. We feature Kenwood, ICOM, Azden, Yaesu, Ten-Tec, Santec & many more. **Shaver Radio, Inc., 1775A S. Winchester Blvd., Campbell CA 95008, 370-6665.**

Miami FL

Casa Marconi, Inc. Pre-owned communications equipment. We do repairs. Send SASE for prices. **Casa Marconi, Inc., 7189 SW 8th Street, Miami FL 33144, 264-8443**

Littleton MA

The reliable ham store serving NE. Full line of ICOM & Kenwood, Drake, Daiwa, B&W accessories. Curtis & Trac keyers. Larsen, Hustler, Telex/Hy-Gain products. Mirage amps., Astron P.S., Alpha Delta protectors. ARRL & Kantronics instruction aids. Whistler radar detectors. Full line of coax fittings. **TEL-COM Electronic Communications,**

675 Great Rd. (Rt. 119), Littleton MA 01460, 486-3400/3040.

Preston ID

Ross WB7BYZ has the largest stock of amateur gear in the Intermountain West and the best prices. Call me for all your ham needs. **Ross Distributing, 78 So. State, Preston ID 83263, 852-0830.**

New Castle DE

Factory authorized dealer! Yaesu, ICOM, Ten-Tec, KDK, Kenwood, AEA, Kantronics, Santec. Full line of accessories. No sales tax in Delaware. One mile off I-95. **Delaware Amateur Supply, 71 Meadow Road, New Castle DE 19720, 328-7728.**

Derry NH

Serving the ham community with new and used equipment. We stock and service most major lines: AEA, Astron, B&W, Cushcraft, Encomm, Hy-Gain, Hustler, ICOM, Kenwood, KLM, Larsen, Mirage, Mosley; books, rotors, cable and connectors. Business hours Mon.-Sat. 10-5, Thursday 10-9. Closed Sun./Holidays. **Rivendell Electronics, 8 Londonderry Road, Derry, NH 03038, 434-5371.**

DEALERS

Your company name and message can contain up to 25 words for as little as \$150 yearly (prepaid), or \$15 per month (prepaid quarterly). No mention of mail-order business or area code permitted. Directory text and payment must reach us 60 days in advance of publication. For example, advertising for the February '87 issue must be in our hands by December 1st. Mail to *73 Amateur Radio*, WGE Center, Peterborough, NH 03458. ATTN: Hope Currier.

PROPAGATION

Number 23 on your Feedback card

Jim Gray W1XU

EASTERN UNITED STATES TO:

	GMT:	00	02	04	06	08	10	12	14	16	18	20	22
ALASKA								20	20				
ARGENTINA								15	15	15	15	15	
AUSTRALIA						40	20	20				15	15
CANAL ZONE	20	40	40	40	40		20	15	15	15	15	20	
ENGLAND	40	40	40				20	20	20	20			
HAWAII		20			40	40	20	20					15
INDIA							20	20					
JAPAN							20	20					
MEXICO		40	40	40	40		20	15	15	15	15		
PHILIPPINES							20	20					
PUERTO RICO	40	40	40	40			20	15	15	15	15		
SOUTH AFRICA										15	15	15	
U. S. S. R.							20	20					
WEST COAST		80	80	40	40	40	40	20	20	20	20		

CENTRAL UNITED STATES TO:

ALASKA	20	20								15			
ARGENTINA										15	15	15	
AUSTRALIA	15	20					40	20	20				15
CANAL ZONE	20	20	40	40	40	40				15	15	15	20
ENGLAND	40	40					20	20	20	20			
HAWAII	15	20	20	20	40	40	40						15
INDIA								20	20				
JAPAN								20	20				
MEXICO	20	20	40	40	40	40				15	15	15	20
PHILIPPINES								20	20				
PUERTO RICO	20	20	40	40	40	40				15	15	15	20
SOUTH AFRICA										15	15	15	20
U. S. S. R.										20	20		

WESTERN UNITED STATES TO:

ALASKA	20	20	20		40	40	40	40					15
ARGENTINA	15	20			40	40	40					15	15
AUSTRALIA	15	20	20				40	40					
CANAL ZONE			20	20	20	20	20	20					15
ENGLAND										20	20		
HAWAII	15	20	20	40	40	40	40						15
INDIA		20	20										
JAPAN	20	20	20			40	40	40			20	20	
MEXICO			20	20	20	20	20	20					15
PHILIPPINES	15						40				20		
PUERTO RICO			20	20	20	20	20	20					15
SOUTH AFRICA											15	15	
EAST COAST	80	80	40	40	40	40	40	20	20	20	20		

Although the forecast for the last week of the month looks good at this time, there is always the possibility of a disturbed geomagnetic field due to unforeseen solar influences. In general, November looks as if it will support good HF propagation to all parts of the world except on the days noted. Note the trends. You may expect poorer conditions centering around the 3rd, the 13th, and the 23rd of the month.

SUN	MON	TUE	WED	THU	FRI	SAT	1	G
2	3	4	5	6	7	8		
G-F	F	F-P	P	F	F	G		G
9	10	11	12	13	14	15		
G	G-F	F	F-P	P	P	P-F	F-G	
16	17	18	19	20	21	22		
G	G	G-F	F	G	F	P		P
23	24	25	26	27	28	29		
P	F	G	G	G	G	G		G
30	G	F	G	G	G	G		G

New From
Spectronics!

The SONY AIR-8 Is Here!

Hand-Held Programmable PLL Scanner/Receiver For
AIR BAND-2M/PSB-FM-AM(LW-MW-SW)

NOW ONLY
\$269.00

Plus \$4.00 UPS



Listen to 2 Meters, Forestry, Police, Fire, Air Traffic Control, LF and VHF Weather, 160 Meter AM & CW, and a whole lot more!

HERE ARE SOME OF THE AIR-8's OUTSTANDING FEATURES!

- Computer controlled PLL tuning system
- 40 memory presets
- Multi scan system (manual and auto)
- 11" Helical antenna w/BNC connector
- Priority channel
- Squelch (auto and manual)
- Direct tuning


HERE'S TRUE SONY QUALITY! Feel the rugged construction, and listen to the high quality sound, and you'll know it's a Sony! The new Air-8 can scan four different frequency ranges in either direction and can store a total of forty frequencies in its four memory banks. You can recall any memorized frequency with the touch of a key, and can scan the ten channels in each of its four memory banks in any order. The Air-8 also has a delay function that prevents dropout enabling you to hear both sides of a conversation, and also a priority feature that samples a chosen frequency every three seconds for a signal. The quick-disconnect BNC connector allows different types of antennas to be easily coupled to the Air-8 for maximum performance.

The Air-8 measures 3 1/8" x 7 1/8" x 2", and weighs just 21 oz. This is truly a sturdy little companion that will give you years of dependable performance wherever you go.

6 Frequency Bands

Band	Frequency range	Tuning interval
PSB	144 - 174 MHz	5 kHz
AIR	108 - 136 MHz	25 kHz
FM	76 - 108 MHz	50 kHz
AM	SW 1601 - 2194 kHz (1603 - 2194 kHz)	1 kHz
	MW 530 - 1600 kHz (531 - 1602 kHz)	10 kHz (9 kHz)
	LW 150 - 529 kHz (150 - 530 kHz)	1 kHz


7 Functions on LCD Display

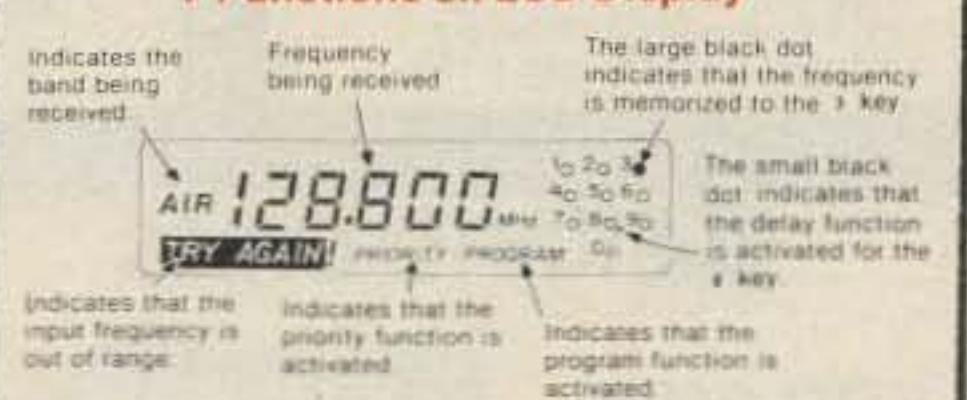

NOW IN STOCK...
BUT YOU'D BETTER
ORDER EARLY!

PACKED WITH SONY STATE-OF-THE-ART TECHNOLOGY

- (1) POWER Switch
 - (2) Volume Control
 - (3) 11" Helical Antenna
 - (4) BNC Antenna Connector
 - (5) Squelch Control. Features both manual and automatic modes.
 - (6) Earphone Jack
 - (7) AM External Ant Jack
 - (8) Band Selector. Selects Air, PSB, AM, or FM.
 - (9) LCD Display (See detailed illustration above)
 - (10) Counter Keys. Used to program frequencies for direct tuning and memories, and also to recall memories.
 - (11) EXECUTE Key
 - (12) SCAN Keys. Used for scan tuning and manual tuning.
 - (13) LIGHT Switch
 - (14) KEY PROTECT. Locks out all keys on front face.
 - (15) EXTERNAL DC INPUT
 - (16) High Quality Speaker
 - (17) ENTER Key. Used to memorize frequencies.
 - (18) Battery Compartment (rear)
 - (19) 9kHz/10 kHz Selector (Inside battery compartment). Used to change MW tuning interval.
 - (20) DIRECT Key. Used for direct tuning.
 - (21) LED Receive Indicator
 - (22) MEMORY Scan Key. Used for scan tuning each memory bank.
 - (23) PROGRAM Key. Used to initiate the program function.
 - (24) DELAY Key
 - (25) PRIORITY Key. Used for sampling a priority channel every 3 seconds.
 - (26) Heavy Duty Body. Rugged military/industrial grade construction.
- AND DON'T FORGET... IT'S A SONY!

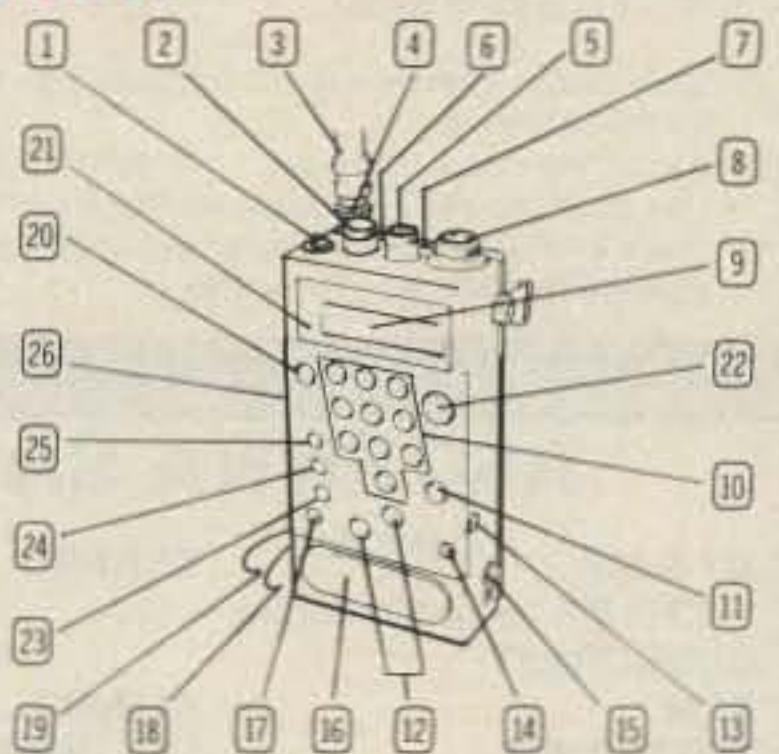

> 166



SPECTRONICS, INC.

1009 GARFIELD ST., OAK PARK, IL. 60304

WORLD'S LEADING SONY COMMUNICATIONS SPECIALISTS!

PHONE (312) 848-6777



MISSOURI RADIO CENTER

102 N.W. Business Park Lane, Kansas City, MO 64150 816-741-8118

Call Toll Free — 9am - 6pm Mon. - Fri., 9am - 2pm Sat.
In Missouri Call — 816-741-8118

1-800-821-7323

TRADE INS ACCEPTED
MasterCard — VISA — COD Welcome

AEA

ALINCO

AMERITRON

ASTRON

AVANTI

B & W

BENCHER


BUTTERNUT

COMM SPEC

CUSHCRAFT

DAIWA


KENWOOD

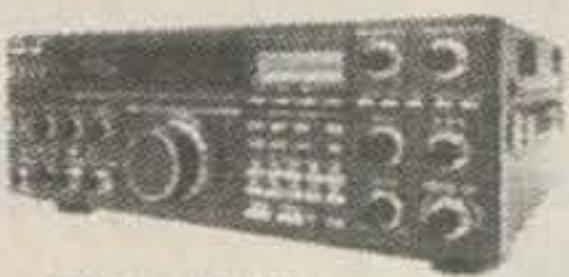

TS940S "DX-cellence"

- Programmable Scanning
- High Stability, Dual Digital VFO's
- 40 Channel Memory
- General Coverage Receiver

KENWOOD

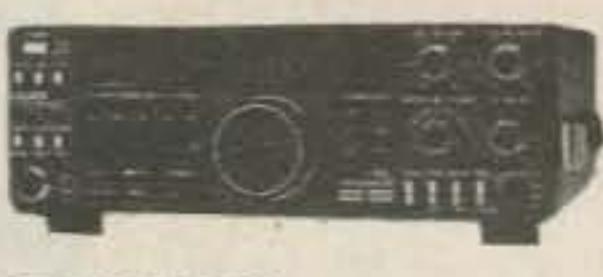

TS440S "DX-CITING"

- 100% Duty Cycle
 - 100 memories
 - Direct Keyboard Entry
 - Optional Built-in AT
- On Sale Now, Call For Price!

KENWOOD



TM2570 "ALL NEW"

- First 70 Watt FM Mobile
- First With Memory & Auto Dialer
- 23 Channel Memory
- Front Panel Programmable CTCSS

KENWOOD

TR2600 "SPECIAL"

- 2.5 W/300 MW 2 Meter HT
- LCD Readout
- 10 Memories
- Band And Memory Scan

TH-21AT

"THE
Smallest HT"

- Compact
Pocket Size
- 1 Watt
- Optional
500mA
Battery

YAESU



FT-757GX "CAT SYSTEM"

- All Mode Transceiver
- Dual VFO's
- Full Break-in CW
- 100% Duty Cycle

CALL
FOR BEST
PRICE!

YAESU



**FT-767GX HF/VHF/UHF
BASE STATION**

- Add Optional 6m, 2m & 70cm Modules
- Dual VFO's
- Full CW Break-in
- Lots More Features

YAESU



FT23/73R

- Zinc-Aluminum Alloy Case
- 10 Memories
- 140-164 MHz, 440-450 MHz
- 600 MAh Standard Opt. 5w
New "super handle"

YAESU

**FT-727R
"DUAL BAND HT"**

- 5 Watts on Both
2m & 440 MHz
- 10 Memories
- Battery Saver
- Remote Computer
Control Capability

ICOM



IC-735 "NEW"

Can you put a price tag on
reliability? Now ICOM offers a
ONE YEAR WARRANTY on its
HF Transceivers & Receivers
purchased after August 1, 1986.

ICOM



IC-751A "NEW"

- 100 KHz - 30 MHz
- FM Standard
- 32 Memories
- QSK (Nominal Speed 40 WPM)

ICOM



ICZ-38A

- Full 25W, 5W low
 - 21 memories
 - Subtones built in
RX 215-230 MHz
- CALL FOR BEST PRICE

IC-μ2AT

- 140-163 MHz
- 10 Memories
- 1W, 1.5W optional
- 32 tones built-in


Kantronics

KPC-2400



"ALL THE FEATURES OF
KPC-2 PLUS 2400 BAUD"

- Easy Direct Interface to PC Compatibles or the
VIC/C-64 Series
- AX.25 Version 2 Software
- Has both the KPC-2 modem for 300 Baud HF and 1200
Baud VHF work, and a new phase shift keying (PSK)
modem for 2400 baud operation.

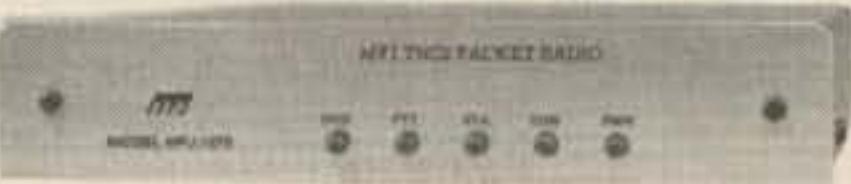

MFJ 1270

- TTI serial port
- Latest AX.25 version
2.0 software
- True Data Carrier detect for HF
- 16K Ram

ANTENNA SALE

HY-GAIN... ON SALE

HUSTLER 25% off mobile

CUSHCRAFT

KLM

BUTTERNUT

HF6V \$118.00

HF2V \$110.00

AEA 144 SR \$42.00

AVANTI 151.3G \$35.00

QUATRON

CALL FOR BEST PRICES

KENPRO KR400 \$139.00

KR500 \$179.00

KR5400 \$299.00

ALINCO AAZ-7 \$89.00

COLUMBIA CABLE

RG-8X .15/ft.

RG-8 Superflex .28/ft.

9913 Type .39/ft.

Rotor Cable .18/ft.

H.D. Rotor Cable .31/ft.

1/4W mm \$13.95

PK 232

- Make any RS-232 compatible computer
or terminal a complete digital operating
position.
- Morse, Baudot, ASCII, AMTOR, Packet
- Loaded with features.

**ASTRON
CORPORATION**



Power Supply

RS7A	\$48
RS12A	\$68
RS20A	\$88
RS20M	\$105
VS20M	\$125
RS35A	\$133
RS35M	\$149
VS35M	\$165
RS50A	\$189
RS50M	\$215
RM50A	\$219
VS50M	\$229

HUSTLER

HYGAIN

ICOM

• MOST ORDERS SHIPPED SAME DAY •

J.I.L.

KANTRONICS

KDK



Finally, an HT that's built to take the realities of life.

Let's face it. It's easy to bump, drop, or get rain on an HT. ■ But if your HT is Yaesu's mini 2-meter FT-23R or 440-MHz FT-73R, such mishaps are a lot less worrisome. ■ They're built to last, with rugged aluminum-alloy cases that prove themselves reliable in a one-meter drop test onto solid concrete. Plus, their moisture-resistant seals really help keep the rain out.

Built for the realities of operating. Despite their miniature size, both radios have all the operating capabilities of larger microprocessor-controlled HTs. Yet operating them couldn't be easier. Consider: ■ You get a 10-volt, 2-watt battery pack. (Optionally, a 12-volt, 5-watt pack, or a 10-volt miniature 2-watt pack.) 10 memories that store frequency, offset and PL tone. (7 memories can store odd splits.) Memory scan at 2 frequencies per second. Band scan at 10 frequencies per second. Tx offset storage. Priority channel scan. Tuning via tuning knob, or up/down buttons.

PL tone board (optional). PL display. External PL selection. Independent PL memory per channel. PL encode *and* decode. Expanded Rx coverage. LCD power output and "S"-meter display. Battery saver circuit. Push-button squelch override. Eight-key control pad. Keypad lock. High/low power switch (½ watt on low power.) ■ Options available: Dry cell battery case for 6 AAA-size cells. Dry cell battery case for 6 AA-size cells. DC car adapter/charger. Programmable CTCSS (PL tone) encoder/decoder. DTMF keypad encoder. Mobile hanger bracket. External speaker/microphone. And much more. ■ So get the intelligent mini HT that's built for life's realities. Yaesu's 2-meter FT-23R, or 440-MHz FT-73R.



Radios above shown actual size.



YAESU

Our 30th Anniversary.

165

Yaesu USA 17210 Edwards Road, Cerritos, CA 90701 (213) 404-2700. Customer Service: (213) 404-4884. Parts: (213) 404-4847.
Yaesu Cincinnati Service Center 9070 Gold Park Drive, Hamilton, OH 45011 (513) 874-3100.

Prices and specifications subject to change without notice. PL is a registered trademark of Motorola, Inc.

KENWOOD

...pacesetter in Amateur radio

NEW


Hear it All!



R-5000 High performance receiver

THE high performance receiver is here from the leader in communications technology—the Kenwood R-5000. This all-band, all mode receiver has superior interference reduction circuits, and has been designed with the highest performance standards in mind. Listen to foreign music, news, and commentary. Tune in local police, fire, aircraft, weather, and other public service channels with the VC-20 VHF converter. All this excitement and more is yours with a Kenwood R-5000 receiver!

- Covers 100 kHz-30 MHz in 30 bands, with additional coverage from 108-174 MHz (with VC-20 converter installed).
- Superior dynamic range. Exclusive Kenwood DynaMix™ system ensures an honest 102 dB dynamic range. (14 MHz, 500 Hz bandwidth, 50 kHz spacing.)

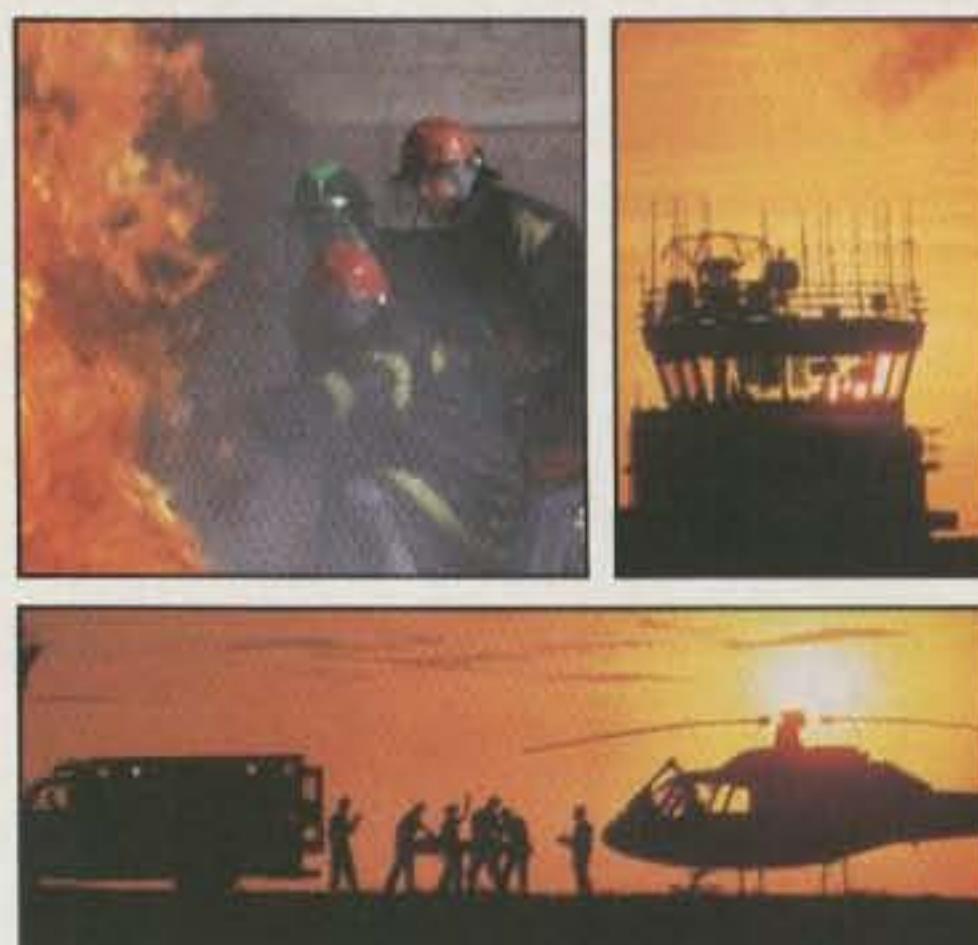

- 100 memory channels. Store mode, frequency, antenna selection.
- Voice synthesizer option.
- Computer control option.
- Extremely stable, dual digital VFOs. Accurate to ±10 ppm over a wide temperature range.
- Kenwood's superb interference reduction. Optional filters further enhance selectivity. Dual noise blankers built-in.
- Direct keyboard frequency entry.

R-2000 150 kHz-30 MHz in 30 bands

- All modes • Digital VFOs tune in 50 Hz, 500 Hz, or 5 kHz steps • 10 memory channels
- Programmable scanning • Dual 24-hour digital clocks, with timer • 3 built-in IF filters (CW filter optional) • All mode squelch, noise blanker, RF attenuator, AGC switch, S meter • 100/120/220/240 VAC operation • Record, phone jacks
- Muting terminals • VC-10 optional VHF converter (108-174 MHz)



- Versatile programmable scanning, with center-stop tuning.
- Choice of either high or low impedance antenna connections.
- Kenwood non-volatile operating system. Lithium battery backs up memories; all functions remain intact even after lithium cell expires.
- Power supply built-in. Optional DCK-2 allows DC operation.
- Selectable AGC, RF attenuator, record and headphone jacks, dual 24-hour clocks with timer, muting terminals, 120/220/240 VAC operation.

Optional Accessories:

- VC-20 VHF converter for 108-174 MHz operation
- YK-88A 1.6 kHz AM filter
- YK-88S 2.4 kHz SSB filter
- YK-88SN 1.8 kHz narrow SSB filter
- YK-88C 500 Hz CW filter
- YK-88CN 270 Hz narrow filter
- DCK-2 DC power cable
- HS-5, HS-6, HS-7 headphones
- MB-430 mobile bracket
- SP-430 external speaker
- VS-1 voice synthesizer
- IF-232C/IC-10 computer interface

More information on the R-5000 and R-2000 is available from Authorized Kenwood Dealers.

KENWOOD

TRIO-KENWOOD COMMUNICATIONS
1111 West Walnut Street
Compton, California 90220