"COTTON"

THE BEST PIBRE-POR

DRIVING RUFES

Kenyon's Patent

INTERSTRANDED COTTON DRIVING ROPES

Max.: Life-Duty

Min.: Stretch

William Kenyon & Sons, Ld.

DUKINFIELD.

Cheshine. England

epher Cotton

cookfield Foundry elfast


Flax and Hean Textile Machine Makers, Iron and Brass Founders

Paint Automatic Screwing and Changing Appart for Hackling Machines. Brush and Doffer Hacklines. Stripper Rod Hackling Machines. Sand Power Reels, with Straight and Cross Win Play and Hemp Cutters. Bundling Presses. Spindles and Flyers.

PARTICULARS ON APPLICATION

PITMAN'S

CORDAGE AND CORDAGE HEMP AND FIBRES

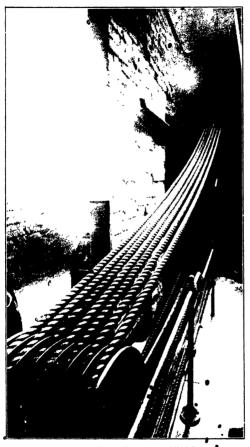

ROPI DRIVE HOR A MILLI SHAFT Frontispiece

AND INDUSTRIES

CORDAGE AND CORDAGE HEMP AND FIBRES

BY

T. WOODHOUSE

HEAD OF WEAVING AND DESIGNING DEPARTMENT, DUNDER TECHNICAL COLLEGE AND SCHOOL OF ART;

FORMERLY MANAGER, MESSRS, WALTON AND CO., LINEN MANU-FACTURERS, BLEACHERS AND FINISHERS

AND

P. KILGOUR

HEAD OF SPINNING DEPARTMENT, DUNDER TECHNICAL COLLEGE
AND SCHOOL OF ART:

"FORMERLY MANAGER, BELFAST ROPE WORKS



London

PRINTED BY SIR ISAAC PITMAN & SONS, LID., LONDON, BATH, MFLBOURNE AND NEW YORK

PREFACE

THE function of a small article in commercial undertakings is often overshadowed by that of the larger and usually more valuable article, and yet the use of the former is often an absolute necessity for the safety of the latter. This relative value is emphasized in the use of cordage, because the successful prosecution of many industries depends in no mean way upon the utilization of this useful and common commodity.

Some of the various types of cordage are well known to the general public, but the methods employed in their manufacture, the machinery used, and the sources of the fibres are not quite so well known. We trust that these phases are discussed in as brief but as complete a way as is possible in this little book, which we hope will take its own place in the literature of our Common Commodities of Commerce.

We take this opportunity of recording our warmest thanks to Messrs. David Bridge & Co., Ltd., Castleton, Manchester, for loan of blocks; to Messrs. The Edinburgh Ropery and Sail Cloth Co., Ltd., Leith, for assistance and for several photographs; and to Messrs. Landauer & Co., London, for some of the statistics regarding the fibres.

T. WOODHOUSE. P. KILGOUR

September, 1919.

CONTENTS

CHAP.						PAGE
	PREFACE			•		v
I.	INTRODUCTORY .	•				1
II.	DEFINITION OF CORDAGE	AND	SOUR	CES C	F	
	FIBRES					5
ш.	CLASSIFICATION OF FIBRES					16
IV.	THE CULTIVATION OF HEN	IΡ				19
v.	RETTING, BREAKING AND S	CUTCI	HING			24
VI.	THE CULTIVATION OF P	LANTS		IIAR		31
VII.	THE PREPARING AND SPIN				·	55
VIII.	THE PREPARING AND SPIN					87
IX.	TWINES, CORDS AND LINE	ES				93
X.	ROPES AND ROPE-MAKING	YARN	NUM	BERIN	(G	100 •
XI.	MARKETING			. •		108



ILLUSTRATIONS

ria.		
114		PAGE
	ROPE DRIVE FOR A MILL SHAFT Frontispiece	
1.	TWO-YEAR-OLD SISAL PLANT	7
2.	AGAVE AMERICANA	8
3.	TRANSVERSE SECTION OF A LEAF OF AGAVE	
	AMERICANA	9
4.	PHOTOMICROGRAPH OF A SECTION OF FIBRES OF	
	AGAVE AMERICANA	10
5.	PHOTOMICROGRAPH OF FIBRES OF AGAVE GROWN IN	
	MEXICO SHOWING OXALATE OF POTASH CRYSTALS	11.
6.	GROUP OF HEMP PLANTS	12
7.	CROSS-SECTION OF PLANT	13
8.	LONGITUDINAL VIEW OF COTTON FIBRES	14
9.	CROSS-SECTIONAL VIEW OF COTTON FIBRES .	15
10.	MANILA FIBRES: ORDER OF GRADING	34
11.	BRIDGE'S "ACME" GRAVITY PATENT SISAL	
	BREAKER	39
12.	BRIDGE'S "CLIMAX" PATENT SISAL DECORTI-	
	CATOR	40
13.	WASHING TANKS	41
14.	HOUSING FOR POWER PLANT	42
15.	CUMMINS'S PATENT HORIZONTAL HYDRAULIC	
	- BALING PRESS	43
16.	MAURITIUS FIBRE PLANT	48
17.	BALES OF MANILA, NEW ZEALAND AND SISAL	
	FIBRES	53
18.	BREAKING MACHINE	59
19.	HACKLING MACHINE	•62
2 0.	SPREAD BOARD	70
21.	BREAKER AND FINISHER CARDS	• 74
22,	DRAWING FRAMES	80

ILLUSTRATIONS

X.

PiG.					A	n,c
	ROVING FRAME		·	• ,	• •	8
24.	DRY SPINNING FRAME .		.•		1	8
25.	HACKLER AND SPREADER			• '	.:	8
26.	INTERMEDIATE MACHINE.			. ^.	•"	8
<u>2</u> 7.	'AUTOMATIC SPINNING MACHI	NE			•	90
28.	DRYING BLEACHED YARNS					98
	ROPE-MAKING (HOUSE MACHI	NES)				10
	LAYING OF A FOUR-STRAND				OPE	
	IN THE ROPE WALK .				• ,	10
31.	VIEWS OF LARGE AND MEDI	UM-S	IZED	COILS	OF	,
	ROPE			•	, •	10

CORDAGE AND CORDAGE HEMP AND FIBRES

CHAPTER I

INTRODUCTORY

RECORDS of civilization are incapable of furnishing the era when the equivalent of strands or cords were first used, singly or collectively, for the purpose of holding two or more articles securely in position. But, although it is impossible to fix a period, one might safely say that the original material which served the purpose was some kind of light twig or lanceolate leaf, and that its appearance when in use as a binder strip differed little if at all from its appearance in the natural process of growth. Even at the present day some of these runners are still used, notably with others the rattan canes for binding bales of manila fibre and other purposes.

The wants of prehistoric man would be very few indeed, but, although he was accustomed in many climates to make use of very scanty clothing or covering, and, in many cases, was practically without any covering, it is obvious that it would be necessary to provide himself with food—the first essential condition to life. In his efforts to secure the necessary foodstuffs, animate or inanimate, it is safe to conclude that bone type of ribbon-shaped vegetable material would be necessary or desirable at an early stage, and probably at the same time or a little later period sinews of different kinds would be brought into use.

As years rolled on, further uses would undoubtedly be found for various kinds of fibrous material; and more improved methods would be applied in adapting the vegetable matter and the like to the purposes intended, as well as more care exercised in the selection of the materials. Some of the characteristics which are essential in practically all binders or tying strips are length, strength, pliability and a tendency to resist atmospheric influences and other natural agents.

The gradual development of civilization, and the gradually increasing demand for suitable substances to be used as binders and for various other purposes would naturally lead to improvements in the utilization of fibrous and other suitable plants, and ultimately to more or less scientific methods of treating these plants with the object of removing the objectionable constituents which are useless for cordage purposes, and of retaining those parts which are considered to be most suitable for the purpose in view.

A complete description of the evolution of modern cord and cordage is practically impossible, for the simple reason that there is no full record of the efforts of many of the earlier pioneers in the various stages, and it is quite possible that many early and praiseworthy improvements have been forgotten or overshadowed, or perhaps absorbed, by the more modern and more elaborate methods which are now indispensable for the successful prosecution of this important branch of the textile industry.

The separation of fibrous material from various kinds of plants is by no means of modern origin, for the great antiquity of yarns which have been spun from vegetable and animal fibres is universally acknowledged. Reference to the process of preparing flax for the purpose of

spinning appears in Exodus ix, verse 31, while the first Biblical reference to thread—one of the technical names for a continuous length of prepared fibrous material—is in Genesis xiv, verse 23: "That I will not take from a thread even to a shoe-latchet." Again, another early reference in Chapter xxxviii refers to a scarlet thread, an indication or suggestion that the art of dyeing was also known at this early period in the early Biblical history.

Herodotus records garments made from hemp by the Thracians, and to the present day hemp is largely cultivated in the vicinity of the lands occupied by the descendants of this ancient race.

Moschion, whose writings appeared before the Christian era, states that the "great ships of Syracuse which were built by command of Hiero II were supplied with hemp and ropes from the Rhone districts. Hemp was brought from Colchis to the ports of the Aegean Sea by the merchants who were connected commercially with the north and east coasts of the Euxine through their Milesian colonies."

Pliny also records the use of hemp for ships, and states that it was in common use among the Romans in the first century for ropes and sails, as well as for other purposes.

The more or less uncertain knowledge of practically all the earlier attempts at the solution of fibre extraction cenders it impossible for us to bridge the gap between the time when crude primitive methods were practised and that which ushered in the more perfect methods described by Pliny in the first century—methods which, in certain cases, have varied little since this early period, and which are practised with a high degree of success. We may, therefore, leave this interesting period to the researches of students in history,

CORDAGE AND CORDAGE HEMP AND FIBRES

and enter upon the description and illustration of the various plants from which fibre is extracted, and the actual processes which such fibre has to undergo before it is ready for the market in one or other of the well-known types of cordage.



CHAPTER II

DEFINITION OF CORDAGE AND SOURCES OF FIBRES

an definition of cordage usually takes the form of "a nuntity of cords or ropes as the rigging of a ship, etc.." it in commerce the word has a more elastic meaning, nd, in general, may be said to include all kinds of entinuous strands or the like which are not intended o be woven into cloth or to be knitted into hosierv. differentiation occurs, however, for one often finds the hrase "Ropes, Cords and Twines" as referring to pecial types of cordage, while further subdivision occurs when one includes the many types of finer material uch as lines, sewing thread, and the like. And when me considers that the various articles which are included n the generic term cordage have a range from ropes of 9 or 10 in. in diameter to fine threads of not more han perhaps anth of an inch, and for which a very arge number of different kinds of fibres are used, some dea of the immense variety can possibly be formed.

From whatever source a vegetable cordage fibre is derived, it is necessary to eliminate more or less of the substances which are closely connected with it in the plant, in order that the comparatively pure fibre may be spun into thread form with the maximum of strengti and production, and the minimum of difficulty and production, and the minimum of difficulty and waste. In this respect it is quite likely that an animal fibre such as wool would be more easily separated that any other known fibre. Wool, however, is rarely used to cordage purposes, although hair, which approximate wool, is used for certain types of cord. There are the rainly many types of wool ropes used for decorative, but, in general, this most valuable substance.

is, for obvious reasons, unsuitable for the usual kind of cordage, and hence wool will not be discussed in this work.

The fibres from the leaves of certain tropical plants. may be separated with a little more difficulty than that which is experienced in the operation of shearing a sheep, but these fibres are hidden, and even when found originally, great difficulty would be experienced before a continuous thread could be made from them. It is quite probable that a natural process of disintegration would disclose these vegetable fibres to primitive man. and lead to their ultimate utilization for various purposes. Or perhaps the gradual wear and tear of the leaves used, either loosely or bound in some crude form. as floor-covering would result in the discovery of the fibrous layers. It is the remarkable advance in mechanical science which has made the production of a continuous' thread from such fibres a possibility for industria! purposes.

Long before continuous spinning was invented, however, it would be desirable to extract the valuable fibrous material from its bed of vegetable matter because the latter is, in general, quite unfit for the purposes which the fibrous material has to perform. This remark applies not only to the fibres which are extracted from leaves, but also to those valuable fibres, which are embedded in the bast layers of the stems of certainplants.

We might now with advantage illustrate by means of photographic reproductions of plants, and photomicrographs of sections, the three sources from which vegetable fibres are obtained to be utilized in the manufacture—or spinning as it is technically called—of the world's supply of cordage.

A typical example of a leaf plant from which one

type of textile or cordage fibre is extracted is illustrated in Fig. 1. This particular example is designated as a





Fig. 1
TWO-YEAR-OLD SISAL PLANT

Two-year-old Sisal Plant. At is 49 in. high, and was grown in the Voi district, British East Africa. Sisal is the commercial name of the fibre obtained from such plants, while the botanical name of the plant is Agare

CORDAGE AND CORDAGE HEMP AND PERSON

Rivida, variety Sisalana; it is sometimes in the Americana.

A recently suggested nomenclature of the Assave and



AGAVE AMERICANA

other plants, from which sisal and similar fibres and screening is due to Professor Lyster. Devel of the United States Department, of Agricultury.

13. Agree Former cyclis of Yutertan : this plant is the plant of the the plant of

reper cent. or the sisal fibres exported from all countries. The leaves bear marginal spines as illustrated in the



TRANSVERSE SECTION OF A LEAF OF

Annue Americana shown at A. Fig. 2: the plant we have by known as Agase Rigida, variety Elongata,

- (2) Agave Sisalana grown for use by the natives of Central America and South Mexico, but not much exported.
- (3) Agave Cantala. This is the "Maguey" plant of the Philippine Islands, and is grown in limited quantities in Java and India.



Fig. 4
PHOTOMICROGRAPH OF A SECTION OF FIBRES OF
AGAVE AMERICANA

When a thin slice or fine transverse section of one of the leaves of such a plant is mounted, and its appearance magnified by photomicrography, the structure of the leaf is shown to be similar to that illustrated in Fig. 3. The upper and the lower outer surfaces or cuticle A resemble greatly the whipped edges of blankets. These surfaces, and all the pulp-like matter lettered B, must be removed, either by manual or mechanical means, in order to separate or extract the groups of



PHOTOMICROGRAPH OF FIBRES OF AGAVE GROWN IN MEXICO, SHOWING OXALATE OF POTASH CRYSTALS

fibre some of which are denoted by the letter C. A still further enlargement of a few of these groups of fibrous a material appears in Fig. 4.

12 CORDAGE AND CORDAGE HEMP AND FIBRES


A photomicrograph of two fibres of a type of Agave grown in Mexico is shown in Fig. 5; it is interesting because it depicts the formation of crystals of Oxalate.



GROUP OF HEMP PLANTS

of Potash. The presence of such crystals makes the fibre unsuitable for cordage purposes, but it may be used in the manufacture of coarse brashes.

The second source from which fibre is extracted is. that from the stems of plants such as flax, hemp, jute



CROSS-SECTION OF PLANT

and the like. A photographical reproduction of a group of hemp plants grown by the Authors appears in Fig. (fernale plant is illustrated on the right, while the gemaining two which are taller are male plants.

A thin cross-section cut from the stem of such a plane

exhibits the characteristics in Fig. 7, in which A is the cuticle or outer bark, B is the woody part, and C the pith. The fibrous layer is between the two dark circles D, and a few groups of fibres in this layer are indicated by the letter E. Here, again, a considerable amount of



Fig. 8
LONGITUDINAL VIEW OF COTTON FIBRES

extraneous matter must be separated from the bast layer, and when separated, the latter appears in the form of long ribbons. The cuticle and bast layer were originally stripped from the plants; the former were then placed in the mouth so that the saliva could aid in the separation of the fibres from the bark, and permit of a finer reduction of the fibrous layer to produce finer threads. And although at the present time this method is gractised for thread making in many primitive communities, it need hardly be said that much more efficient, methods have long been practised for commercial

purposes, such methods being known by the technical terms "retting," "breaking," and "scutching."

The third source of vegetable fibres is the cotten plant Gossypium, the white fluffy fibres being obtained from the pods or bolls. The operation of cotton picking which is often referred to consists of removing this white fluffy mass from the pods in which also the seeds are located. Cotton fibre is unlike the two previous classes of fibre



Fig. 9
CROSS-SECTIONAL VIEW OF COTTON FIBRES

because its method of growth is different. The other textile fibres are composed of bundles of plant cells, whereas the fibres of cotton are individual cells; they form as it were individual hairs on the seed, and in drying flatten and also assume a twisted and crinkled condition as exemplified in Fig. 8, which illustrates the longitudinal characteristics of several fibres. Fig. 9 shows the sectional enlargements of a few fibres. This structure of the cotton fibre is a very valuable property, since it not only assists in the binding of the fibres into a thread, but also gives a resiliency and spring to ropes manufactured from it which is most useful in driving; this property makes cotton almost indispensable for the construction of the smaller sizes of ropes for driving purposes.

CHAPIER III

CLASSIFICATION OF FIBRES

CORDAGE fibres which are used at the present time are naturally of greater variety than those which were utilized for similar purposes in the early periods of history, for records of those used in such early periods appear to indicate only hcmp and flax. As already stated, wool would not be used to any great extent, but, after methods had been evolved for spinning a continuous thread from fibres such as hemp and flax, it is highly probable that the cotton fibre would also be used in the making of cords and ropes.

Authentic records point to the fact that the cultivation of flax plants for fibre was practised in Egypt from 5,000 to 6,000 years ago, and hence it is quite possible that hemp plants would be grown under similar conditions and for suitable purposes; moreover, if the hemp fibre were proved to be suitable for cordage purposes, it is not difficult to believe that the cultivation of this important plant in suitable districts would become as universal as that for flax.

Another reason which suggests the early use of hemp as a cordage fibre is the universality of its presence in most eastern countries as a vegetable product. It is at present cultivated in most European countries, and especially in Russia, Italy, Austria-Hungary, Serbia, France and Germany. It is also found on the East and West coasts of Africa, in many of the States of America — particularly in Kentucky—as well as inclined, China and Japan.

If the climate is comparatively most, with a period.

of mild temperature and a suitable soil, the hemp plant can be successfully cultivated for fibre; it is cultivated in India and in most of the tropical countries for the production of a liquor which the natives consume in much the same way as intoxicating liquors are consumed in temperate countries.

True hemp is a plant which grows wild in Central Asia, but must be cultivated in practically all other areas. It is an annual, and requires a rich soil with a subsoil capable of retaining sufficient moisture to promote the growth during periods of dry weather. If otherwise, the growth of the plants would be checked during this dry period with a consequent deficient yield of fibre.

With the gradual development of trade, and the introduction of new kinds of fibre to be used for cordage, an extended meaning has been applied to the word hemp, but, unfortunately, the word has been applied rather loosely to many types of fibre which are used for rope-making. Thus, one frequently hears the following names in reference to different fibres—

Manila Hemp,

Sisal Hemp,

New Zealand Hemp,

Mauritius Hemp,

Bowstring Hemp, etc.;

whereas the real hemp is usually designated as-

Russian Hemp,

Italian Hemp,

Indian Hemp,

Sunn Hemp, etc.

To differentiate between these different fibres, and so provide a better classification and conception of the terms, it should be clearly understood that the proper heap fibres, e.g., Russian, Italian and Indian, are obtained from the plant Cannabis Sativa, and that the fibres are located in the bast layers of the plant stems as exemplified in Fig. 7. The fibres are extracted from these layers in the same way as the fibres of flax and jute are extracted from similar layers, that is, by a process technically termed "retting." Such fibres are called soft fibres in contradistinction to hard fibres to which class Manila, Sisal, New Zealand, Mauritius and Bowstring fibres belong. The hard fibres are located in the leaves or in the leaf stalks of plants; typical examples of the general appearance of such plants and the internal characteristics are illustrated in Figs. 1 to 5.



CHAPTER IV

THE CULTIVATION OF HEMP

THE botanical or scientific name for hemp is Cannabis • Sativa, order, Moraceoe, sub-order, Cannaboidae. The plant grows wild in Central Asia, but is cultivated in many tropical and temperate regions of both hemispheres. From a cordage point of view the fibre is, naturally, of most importance, but, incidentally, it might be mentioned that the seed is used as a food for birds, and oil is extracted from it; in addition, in tropical countries, a resinous juice exudes from the stalks, leaves and flowers which is made into a violent intoxicant.

The plants in general attain a height of from 4 to 8 ft. or more, and in exceptional cases, such as under good cultivation in suitable soil, approach 20 ft. in height. The leaves are five to nine lobed with serrate margin. The plants are dioecious and the flowers are yellowish-green, small and inconspicuous; the male flowers are numerous and produced in drooping panicles, each flower of five segments; the female flowers are fewer in number, on spikes, single leaf, single ovary, with greyish-green to brownish-grey seed, and rich in oil. The matured stems are usually hollow, and the bark layer very fibrous throughout the whole length of the stem.

The plant readily adapts itself to great changes of climate, and, as already stated, is found in all climates, from the tropical ones of India and China to the frozen regions of Northern Russia. It is adversely affected, however, in the earlier stages of its growth by frost.

and always requires a moderately strong sunny period during its growth. It is cultivated in the temperate climates chiefly for its valuable fibre, but a serviceable fibre may be obtained from the plants which are grown in tropical countries.

The most important fibre-producing areas are Russia, Italy and Austria-Hungary, but it is produced in other countries, notably those mentioned below, as well as in Turkey, China and the Southern and Western areas of the United States of America. The Italian fibre is the best of all for fine work, while the Russian fibre, which has a special affinity for tar, is the most satisfactory for use in the manufacture of heavy cordage for maritime purposes.

The approximate annual production of hemp from fourteen different countries appears below—

Russia .			400,000	tons
Italy .	٠.		80,000	
Hungary			50,000	,,
India .			36,000	,,
Siberia .			22,000	,,
Austria .	• .		18,000	,,
France .			15,000	,,
Japan .			8,000	,,
Serbia .			8,000	,,
Caucasus			5,000	,,
Poland .			4,000	3.
Bulgaria			2,000	,,
Germany			2,000	i, .
Roumania	ι.		1.500	

The successful cultivation of hemp requires a deep and well-worked soil with a large amount of humus Alluvial soils are well adapted for the purpose. The strong loam soils of Italy are typical of the best. In all cases a good supply of moisture is necessary, otherwise the crop would be short and stubby and ill adapted to the production of fibre.

The land should be well prepared by deep ploughing

and followed by rolling and harrowing to produce a evel and uniform seed bed. The roots of the plants will penetrate into the subsoil if the land is well ploughed, but waterlogged land is unsuitable. A liberal supply of manure is essential owing to the vigorous growth of the crop, and while farmyard manures are the best, the stalks of a leguminous crop may be ploughed in. Manure from animal slaughter-houses is very suitable, and all refuse from the previous hemp crop should be returned to the land. Since the hemp fibre contains a large amount of lime and phosphates, it may sometimes prove advantageous to use dressings which contain these substances.

The secd should be selected with care, and should be tested for its powers of germination. Stored seeds are liable to heat and lose their vitality, and immature seeds are also unsatisfactory. Indian and Chinese seeds are often mixed with home seed. In temperate climates sowing should take place as early in spring as possible, but after the night frosts have passed. The early spring rain and sun are very beneficial, and the foliage which appears moderately early helps to conserve the moisture in the soil as the heat of the sun gets more intense.

The amount of seed to be sown depends upon the type of fibre desired; thus, one bushel of seed per acre for coarse fibre to three bushels per acre for fine fibre are the approximate quantities, and the seed may be sown broadcast by hand, or by machines into drills about 6 or 7 in. apart. In all cases the seed should be well covered to prevent ravages by birds, hence, it is usual after sowing to harrow and roll the fields again for the above purpose, as well as to prepare a level and uniform bed for the germination of the seeds.

where the land is cultivated with the production of seed as its main object, the seeds should be sown thinly

and wide apart, say, in drills or rows from 6 to 7 ft. apart, so that the plants will branch extensively and thus provide facilities for a profusion of flowers. The male plants are pulled after the bloom is shed, but the female plants are allowed to mature under the best conditions so that a large crop may result. Great care must be taken in harvesting and in storing the seed; provision must be made to prevent the deterioration of seed through a process of heating. The average yield of seed per acre is about thirty bushels, but in exceptional cases as many as sixty bushels may be obtained.

Under satisfactory conditions the young plants should appear in from seven to twelve days, after which it is necessary to thin them out and to remove the weeds. While the plants must be wide enough apart to facilitate good growth, there should not be too much space between them when grown for fibre, or branching out will result. If a field has become troublesome with weeds, no crop will eliminate them as quickly as that of hemp.

If desired both male and female plants may be harvested at the same time, but it is often considered advisable to harvest them separately. It is as well to make most of the mixed crop if the labour is available. The male plants may be cut or pulled when the flowers attain maturity or a little after, and when the leaves are changing colour from green to brown. The female plants being shorter may be allowed to remain for about four weeks when the seeds are beginning to ripen.

The yield of fibre per acre of land cultivated is influenced by several conditions, but on good lands under satisfactory conditions of cultivation, an average of the 7 cwt. may be relied upon, and in many cases this quantity is easily exceeded.

After the plants are harvested, a number of minor

operations take place in different districts before the plants are subjected to the important process of "retting" or rotting. These preliminary operations are mostly to reduce the weight of the plants and to discard undesirable matter which happens to be easily detached, as well as to secure uniformity. Thus, the tops and roots may be cut off, and the leaves stripped or beaten off, while after the plants have been dried, they may be arranged according to length and thickness. They are then tied up into bundles of suitable bulk for the operation of retting.

CHAPTER V

RETTING, BREAKING AND SCUTCHING

The retting operation is that process which converts the constituents of the stems into that condition which will enable the bast layer, see Fig. 7, to be separated easily from the remaining parts of the stem. In all fibrous plants of the type illustrated in Figs. 6 and 7, a retting process is conducted in which the plants are either submerged in water, called "water retting," or read on lands adjoining the cultivated areas to undergo hat is termed a weathering action, or "dew retting." Vater retting is the more satisfactory and gives the etter results, and, in the hands of experienced operatives more rapid production of fibre of the better grades.

The submersion of the plants, caused by placing tones, clods or the like on to the bundles, may be in lowly-running fivers, in which case the bundles are cept intact in crates moored to the bank, or a similar ubmersion may be conducted in a series of tanks or conds. In the latter case a supply of water may be allowed to enter and leave the tank, and the plants are kept there until the operation is complete. Stagnant water acts quicker on the plants than does running water.

The retting action is a process of fermentation, and the amount of active bacteria can be regulated by the temperature and rate of movement of the water. Flat retting in the river Lys, near Courtrai, is the fines system known at present, and its value is due to the slow rate of movement of soft, pure water which is favourable to the production of the retting bacteria;

the adaptation of a similar system to this where the water supply is suitable will give high-class results.

Fermentation starts soon after the plants are submerged, and the rate of fermentation depends upon the temperature of the air and water: its progress is identified by the presence of air bells on the surface of the water. As the operation proceeds, the bundles have a tendency to rise to the surface, and hence extra weights are added to keep them submerged. When the formation of air bells ceases, the operatives carefully examine and test the stems to ascertain the progress of the operation; they usually strip off part of the bast layer, see Fig. 7, from the wood or core, and their judgment of the correct stage of retting is determined by the ease with which this separation is effected. Great skill is " required here, or rather ripe experience, for if the retting is not complete, a portion of the woody matter goes forward with the fibre, while if the stems are overretted, the fibre is weak: in both cases, a faulty judgment causes trouble in the actual manual or mechanical processes which follow.

Other methods of retting are adopted in different countries, and even in certain districts of those countries where the above system is in vogue. It will be understood that the choice of any system will depend largely upon local circumstances, and in all cases, other things being equal, the method adopted will be that which will yield the largest quantity of hemp fibre at the least cost.

The characteristics of the fibres are typical of the countries in which the plants were grown, and of the processes of retting. It will be almost invariably found that the best fibre is the result of the most elaborate and careful methods of cultivation and retting, together with the equally careful and efficient subsequent processes of breaking and scutching.

It need hardly be said that the above elaborate and costly methods are adopted only for the very finest grades of fibre; they would not be attempted in the case of those plants which grow and ripen so rapidly in some tropical countries, and in which a short, harsh fibre only is obtained; for such plants the cheapest and simplest methods of extraction are practised.

Many praiseworthy attempts have been made, and others are still in progress, with varying degrees of success, to extract the fibre quickly. None has yet been able to supplant the above-described costly, lengthy and laborious process, but with modern science, machinery and experience, one might expect that some brilliant genius will ultimately solve the problem. Many industrial problems have been solved by the joint action of experience and applied science, and one might therefore hope to see a great simplification of the present hazardous operation of retting.

The successful introduction of a machine or a system of machinery which would pull, strip and clean hemp and allied plants and fibres on the field of growth would not only open up new fields of cultivation, but would increase the wealth of our country by millions of pounds; it would do much to prevent the depopulation of the rural districts and so help to preserve the hygienic conditions of our large towns.

The retting operation completed, the stems are washed and spread on grass land, if available, or stooked like grain and allowed to dry thoroughly. It is acknowledged to be advantageous to allow the stems to remain a few days on the grass, for after this exposure the fibre is more easily and efficiently separated from the other constituents of the bast layer.

The ribbon-shaped layer may be about 3 ft. long in the shorter Russian grades of hemp, but up to 15

in length in the Italian grades. The colour varies from grey and brown to a rich cream and almost white in the finest grades.

The ultimate fibres are large and somewhat irregular in shape; they vary in length from 0.2 to 2 in., with an average length of about 1 in., while the diameter is only about 1000 or 0.001 of an inch.

BREAKING AND SCUTCHING.—Various methods are adopted to separate the bast layer from the central or woody part of the retted and dried stems of hemp, but in all cases the operation thus involved is termed, "breaking." The central woody part has to be broken into a great number of short lengths, and this is done in some districts by exceedingly simple apparatus, and in other districts by modern breaking machines. Perhaps the simplest apparatus which is used for this purpose consists of a series of Δ-shaped wooden bars arranged horizontally in the form of a grid, and into the cavities of this row of bars fits another group or series of similar bars but inverted. The latter group is hinged at one end and provided with a handle at the other.

When the handle and the upper set of bars are raised, a few hemp stems are laid across the fixed lower bars; the handle is then pressed downwards, and this causes the stems to be squeezed and broken between the two sets of bars. By repeated blows with the upper bars, and lateral movements of the stems, it is evident that the woody core would be broken, and this is done without damaging the fibrous layer. A treadle may be attached to the handle end of the hinged grid and thus have both hands free to manipulate the stems and to remove that portion of the broken wood which has not attend of the same.

The mechanical means for this purpose consist of a

number of fluted rollers between which the stems pass and by the flutes of which the wood is broken. Sometimes scrapers are used in the same machine to help to remove the small particles of wood. What remains in the hand after the simple manual process is completed, or what is delivered from the machine by the delivery rollers, are the unbroken fibrous layers to which still adhere several particles of woody matter or shive as it is called. A further operation, termed "scutching," is necessary to remove this shive and so leave the lengths of fibre as clean as possible.

Scutching.—The operation of scutching may be considered in some respects in the light of a scraping action in which the broken and partially-clean, ribbon-like structures of fibres occupy a position between a fixed and a movable board, and are subjected to the friction between them. The simplest apparatus for this purpose consists of an upright wooden board with a horizontal slot near its upper end and through which the ends of the fibres are passed. The fibres hang downwards, and while thus depending a flat wooden "scutching handle" or flail-very similar in shape to a baking spit-is brought smartly with its edge to traverse downwards against the fibres, and thus to remove the objectionable shive but at the same time to prevent, as far as possible, the destruction of the fibrous layer and the accumulation of waste. The operative can expose as much of the fibrous layer as desired to the action of the scutching handle in virtue of the slot, and after one end of the "strick" is finished, the other end is treated Similarly.

While the above hand method is largely practised and is quite satisfactory where comparatively small quantities have to be treated, or for very fine and expensive material where delicate treatment is essential, the modern

method of scutching is done by power. The feeding and manipulation of the stricks are, however, still under the direct control of the operative. In these mechanical scutchers it is usual to employ six to twelve handles—narrower but longer than the hand flail—and these handles project from a common centre or shaft, somewhat after the form of the sails of a windmill. As the shaft rotates, the handles are brought successively to act against the fibres as in the simpler process.

Large quantities of Russian and other hemps are only partially cleaned, and are termed "siretz" hemps, while in some districts where the most valuable plants are grown, the bast layer is stripped from the stems, and the material subjected in smaller quantities to the cleaning and washing precesses, thus producing a higher value fibre.

In hand scutching an operative cleans on an average about 10 to 12 lb. of Italian hemp per hour, but such quantities can be, obviously, only approximate, for the quantities prepared will vary greatly, depending as they do upon the efficiency of the apparatus at command, the degree to which the fibrous layer has to be cleaned, the quality of the material and the skill of the operator. The better grades of fibre usually and almost invariably receive more treatment than the lower grades.

The commercial value of hemp depends, as already stated, upon its strength, colour, freedom from faults, and its spinning properties; comparative values are scarcely possible unless in certain seasons, because prices fluctuate greatly according to the demand for certain grades of cordage as well as to the prices of other fibres which may be used for similar goods.

Italian hemp can be spun into thinner or finer yarns than any of the other hemps, and it is therefore a competitor with certain grades of flax. French, Chiness

SO CORDAGE AND CORDAGE HEMP AND FIBRES

and Russian hemps are also valuable, and besides being used alone, are sometimes mixed with the coarser varieties of Italian hemp for certain kinds of cordage and lines.

The following table shows the amount of fibre in tons for five years in regard to Russian and Italian hemp imports to the United Kingdom.

	1907.	1908.	1909.	1910.	1911.
Russian . Italian .	17,299 10,462	15,753 8,133	13,816 10,144	12,576 10,298	14,981 10,343
	27,761	23,886	23,960	22,874	25,324



CHAPTER VI

THE CULTIVATION OF PLANTS FOR HARD FIRRES

The different types of hard fibres for cordage are mentioned in Chapter III, page 17, and, although there are tertain features which are more or less common to all, there are differences which make it advisable, if not necessary, to discuss each main type separately.

One of the best-known hard fibres is the Manila or Abaca fibre (obtained from the wild plantain, a variety of the banana plant) Musa textilis. It is an excellent cordage fibre and is largely used both in this country and in the United States of America. The plant, from which the fibre is obtained, is in many respects indistinguishable from the banana plant during the period of growth; the colour of the leaves of the banana plant s, however, usually of a darker green shade than that if the leaves of the Musa textilis, while the flowers and fruit of the banana are much more abundant than are those of the Manila plant. On the other hand, the fibre of the banana plant is very poor in quality, and practically valueless for cordage purposes.

The Musa textilis is peculiarly indigenous to the Philippine Islands, indeed most of the attempts to cultivate this plant in other areas have been unsuccessful. Manila, Luzon and Cebu are three of the principle fibre-producing areas, and, because of the suitability of the soil and climate in these areas, the growth of the Manila industry has been extensive, and large quantities of high-grade fibre are produced annually in these three areas.

Cleared forest land is very suitable for the propagation

of young plants which require a certain amount of shade to assist their growth in the early stages. During the period of growth a large number of suckers or young plants grow around the parent plant; these suckers are used in general to start a new plantation, while in other cases the young plants are raised from seed. In both cases, the young plants are set out so that from 500 to 600 may occupy an acre, and the distance between the plants is from 8 to 10 ft. If plants are propagated from seed it takes about one year before the shoots can be set out in the plantation, and they should be spaced in the same way as the suckers.

The ground should be kept clear of weeds at least during the first year; after this period, vigorous growth starts, if the usual moist season prevails, and during the three or four years of growth the plant attains a height of 8 ft. and upwards. Occasionally a plant grows to a height of 20 ft. After the lapse of three to four years, the fibre plant develops a flower, and then the plant should be cut down to obtain the best type of fibre.

Hilly land, and particularly volcanic slopes with a moist loose soil, are very well suited for the cultivation of these plants. Swamp lands, while satisfactory for Certain types of plants, are unsuitable for the cultivation of Manila.

The work of harvesting and the extraction of the fibre are usually done on the contract system; a supervisor will take over the plantation upon which he starts his men on the dual precess.

The fibre is produced in the sheathing leaf stalks which form a bundle 6 in. to 1 ft. or even more in diameter with a central stem or flower stalk about 3 in.

in diameter. The flowers are near the upper part

which may reach a much greater height than the leaves. The pistillate flowers are nearest the base and form fairly large fruits which are filled with black seeds.

The bundle of sheathing leaf stalks are cut off a few inches above the ground and split up into widths of about 5 to 6 in., after which the fibre can be extracted either by hand or by machine. When the hand method is practised, the stalks are first well beaten with wooden mallets, and then scraped with suitable instruments until the fibre is freed from the surrounding vegetable matter. The separated fibre is finally washed and dried, and made up into bales of 280 lbs, each.

It is very important that the substances which surround the fibres should be completely removed, and that the fibre should be thoroughly dried after it has been well washed. These operations completed, the dried fibre is conveyed to the premises of the owner of the plantation to be selected and valued. The approximate cost of extracting the fibre is half its market value, and this sum is often paid by the farmer to the men who perform the work.

The stripped and cleaned fibre is now graded by experts who are appointed by the Government of the Islands, and the various qualities are now much more uniform than they were formerly, see page 34.

In general, a yield of 2 to 3 lb. of fibre per plant is obtained, but this quantity may be doubled in some cases. With the average mentioned, approximately 12 cwt. of fibre per acre would be produced, but a considerably higher quantity could be obtained by more perfect machinery, as the loss of fibre in the operation of stripping amounts, in many cases, to 25 per tent. of the possible production.


The following table shows one method of grading the

CORDAGE AND CORDAGE HEMP AND FIBRES

fibre, and the average price per ton during June, 1913. See also page 51.

Extra Fine Pri	ime					/20 · · · · · ·
Prime		•	•	•	•	£56 to £58.
Pormary o	•					52 54
Superior Curre Good Current	nt	•	•			50 ., 52
Midway .	•	•	•	•		48 ,, 50
Current .	•	•	•	•	•	44 , 46
Seconds .	•	•	٠			41 ,, 42
Brown	•	•	•	•		38 , 39
Fair	•	•	•	•	. •	36,, 38
Medium .	•	•	•	•		37 ,, 38
Coarse	•	•	•	•		32 ,, 33
Coarse Brown	•	•	٠	•		28 ,, 29
			-			97 00

Another method of grading is by means of letters, and Fig. 10 is a photographical reproduction of fifteen



MANILA FIBRES. QRDER OF GRADING.

different samples representing the general grading as marked A to M. There are also a few intermedia

grades which are of similar classes of fibre but discoloured—a fault due to imperfect cleaning.

The imports of Manila to the United Kingdom for the years 1911 to 1915 inclusive and the actual value appear in the following table, while the average value of one grade, Fair Current, appears alongside. See also page 34.

*					
Year, Tons,		Total Value.	Price per ton of Fair Current.		
1911 1912 1913 1914 1915	75,449 83,313 64,579 54,206 57,783	£1,647,542 £1,990,481 £1,600,450 £1,396,593 £1,760,471	£19 £21 10 - £34 £27 15 - £28 10 -		

SISAL.—This is a fibre which is almost of equal importance to Manila for the production of cordage. The plants, which are produced extensively in Mexico, Africa and the Bahama Islands, form a group termed the Agaves.

Those plants which are most extensively cultivated for fibre purposes have recently been classified, see page 8.

The particular Agave plant from which the Sisal fibre of commerce is obtained is the Agave Sisalana, or Henequen, natural order, Armaryllidaceae, the chief centres of production of which are Yucatan and Campeachy; the cities of Merida and Progresso are the centres of production of the fibre for the export markets,

The plants grow very successfully on waste and arid lands, and require very little attention after the preliminary operations of clearing the land and of planting out the young Agaves either as bulbules or ("bulbils*) produced from the creeping roots.

The stems of the planes are stumpy, and large fleshy

leaves are produced which attain a height of 3 to 6 ft. The flowers are produced on a long stalk or pole which often rises to 30 ft. or more. The flowers appear in dense groups on lateral branches upon the axils of which develop bulbils; these grow to maturity and then drop to the ground where many of them take root and thus provide young shoots which may be replanted for another crop.

In the formation of new plantations for the production of fibrous plants, it is only necessary to clean the ground and dig the soil round where the young bulbils, suckers, or a mixture of both, are to be planted. They are so arranged that there is a greater space between the rows than there is between the plants in a row, say in the proportion of 8 to 6, and about 1,000 plants are spaced in an acre.

If the plants are taken from nurseries where the bulbils have been propagated for transplanting, it may be found advantageous to provide light tramways for their conveyance, as well as for the conveyance of the mature leaves in the opposite direction. The extra space between the rows is for facilitating such work by rails and other means. In fact, a plantation for the cultivation of Sisal plants and the production of the fibre should be laid out on a definite plan with provision, not only for successful cultivation, but for the subsequent operations of stripping, washing, cleaning and baling the fibre, while a desirable, if not absolutely necessary consideration, is the choice of ground in close proximity to a satisfactory district for labour.

A sport time after the plants have been set it is advisable to clean and weed the ground periodically for at least two years to give the plants a favourable start; afterwards vigorous growth occurs, and no further attention in this line is necessary.

It will be evident that a more vigorous growth will obtain in warm climates than in cold climates, but at the same time these warm climates may be exceptionally suitable; indeed, it has already been proved that, in some of the more recently-established centres of cultivation such as Africa, a better fibre is being produced than in some of the older established centres, and, moreover, the growing period is shorter.

To make a fibre-production area a success, it is advisable to adopt a systematic extension of the plantation each season, so that a continuous supply of leaves will be obtained, and that the available labour supply can be fully utilized either with operations in cultivation or fibre extraction; in this way a regular supply of fibre could be placed on the market for manufacturing purposes.

After a plantation is completed, the first cutting of the leaves may take place in from two to four years, depending upon the situation of the plant and its state. It is not necessary to cut down the whole plant; the larger leaves are cut when at maturity, and others as they mature; successive cuttings may be at intervals of approximately six months, after which the plant may be cut down and the spot allowed to remain fallow for a year, when a new plant is introduced.

The yield of fibre from the plants will vary considerably from time to time, such variation being influenced by the district, the weather and by the degree of perfection of the methods employed for extracting the fibre from the leaves.


The usefulness of the Agave fibres has been acknowledged for some time, and their value has been enhanced
by the production of superior fibres in various centres
of Africa as already stated; improved methods of
cultivation and the use of modern and efficient stripping

and cleaning machines may lead to the production of this type of fibre which will compete successfully with many of our most valued fibres for cordage use.

As the leaves are cut down from the plants, they should be removed at once to the stripping machine. The original name for such a machine was "Raspadore," and supposed to be an invention of a Franciscan friar. The modern English word for the purpose is "Decorticator," and, although the term "leaf-crusher" or "scutcher" appears to be more in keeping with the operation to be performed on Sisal leaves, than that of "decorticator," a more extensive meaning has been given to the latter term which is now taken to indicate the mechanical operation for the separation of the pith and surrounding vegetable structure from the fibrous layers in practically every type of plant.

Two distinct machines, one for crushing the leaves, and the other for finishing the stripping, are made by Messrs. David Bridge & Co., Ltd., Castleton, Manchester, and these provide an excellent system for treating the leaves as they are delivered from the field of growth:

The crushing machine, termed Bridge's "Acme" Gravity Patent Sisal Breaker, is illustrated in Fig. 11. The leaves of the plant are placed on the travelling endless cloth between the wooden side guides on the right-hand side of the illustration. They ultimately come into contact with the first pair of corrugated rollers which are so set that there is a minimum of in between the surfaces of the opposing corrugations. After the leaves have been crushed between these rollers and carried forward by them, they pass between a second but smooth pair of rollers the nearest distance between the surfaces of which is $\frac{3}{16}$ in. On emerging from these rollers, the leaves pass down the delivery table on the left. The upper roller in each pair is



acted upon and pressed downwards by spiral or coil springs which not only yield slightly to the varying thicknesses of the leaves, but which will allow the roller to rise fully $\frac{7}{6}$ of an inch in case any foreign substance should enter between the rollers.

The crushed ribbons from the foregoing machine are now taken to Bridge's "Climax" Patent Sisal Decorticator, illustrated in Fig. 12. As in the crushing machine,




Fig. 12
BRIDGE'S "CLIMAX" PATENT SISAL DECORTICATOR

the material is fed into the rollers by an endless cloth; the ribbon-shaped lengths are exposed to the action of opposed drums on the same principle as that embodied in the original raspadore, the result being that the remains of the objectionable mater which accompanied the figrous layer from the caushing machine is scraped off and a maximum amount of fibre delivered. The Decorticator is provided with all the latest improvements for a maximum production, and both, machines, together with the washing tanks, Fig. 13, and the





Fig. 13 WASHING TANKS


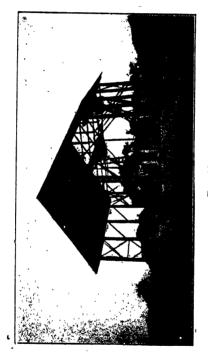


Fig. 14 HOUSING FOR POWER PLANT

Seq. 31

necessary power plant for driving the whole system can be housed in or near a simple structure somewhat as illustrated in Fig. 14.



CUMMINS'S PATENT HORIZONTAL HYDRAULIC BALING PRESS

The fibre, having been extracted, washed and dried, is conveyed to the rapid baling press, Fig. 15, which is an illustration of Cummins's Patent Horizontal Hydraulic

Baling Press. Here the fibre is packed by hydraulic pressure into a small space ready for exportation to those countries where the fibre is to be manufactured. The above type of baling press is now largely used, not only for Sisal fibres, but also for China jute, cotton and other textiles, and it is capable of compressing the fibre to a density of 60 lb. pcr cubic foot.

After the third year's growth, the annual production of fibre reaches about one ton per acre. The production of fibre from the various countries has been greatly increased during recent years, and that for 1914, which will be found in the table on page 52, may be taken as a good indication of the quantities placed on the market.

There has not yet been any considerable competition between Sisal and Manila fibres for the manufacture of similar types of cordage, but with improved methods of cultivation and of cleaning the Sisal product, a greater competition may be expected.

A large quantity of Manila fibre is used in this country for binder twine, whereas Sisal is used for the same purpose in the American centres. As a matter of fact, the U.S.A. markets of different kinds absorb 90 per cent. of the total Sisal crop which amounted in 1914 to 220,000 tons.

A new method of marketing the Sisal fibre from Yucatan has been introduced through a Committee or Commission who will be responsible for the grading and marketing of the fibre and will, with the sanction of the Government, deal entirely with the financial arrangements.

The Commission will receive all the graded fibre, and on receipt of this a payment will be made to the harmer. The fibre will be placed on the market at current rates, and every five years the accounts will be balanced and the surplus, if any, will be divided.

pro rata amongst the producers. In the case of loss, the deficit will be met by the Commission.

Sisal fibres are graded as under-

Special: perfectly clean and absolutely white fibre, free from stains or adherent pulp.

Superior Clean: perfectly clean fibre of creamy or yellowish tint, free from stain or pulp.

Current Clean: well scraped, whitish or greenish colour, 5 per cent. dust permitted. This is the standard grade for price.

Stained: also well scraped but with dark or red streaks. No more than 25 per cent, dark and no adherent pulp.

Inferior Stained: must be free from adherent pulp, but may contain as much as 75 per cent. of dark fibres.

New Zealand Hemp or Flax.—The botanical name of this plant is *Phormium Tenax*, natural order, *Liliaceae*. The plant has long, peculiarly-shaped leaves, the roots of which send out creeping rhizomes on which the leaves 6 to 10 ft. in height, are produced in clumps. Maturity is reached in about four years, and propagation is obtained by the growth of the rhizomes, and also by the self-sown seeds which are produced in large numbers from the flowering and fruiting stage.

Large quantities of this useful fibre are used, and it can be produced cheaply and in large quantities from otherwise unproductive lands, such as the drained swamp lands in the neighbourhood of the Manawatu river in New Zealand. In this district the plants grow in dense masses, and although more than 20,000 acres are under cultivation, additions are gradually taking place. Through this area are laid about fifty miles of light railway tracks. The plantations require little attention beyond that of careful drainage; over-drainage may cause as much damage as under drainage.

Wellington is the principal shipping port, but shipments are also made from Auckland and other ports when the value of the fibre makes such a course profitable.

Phormium Tenax has also been cultivated on a comparatively large scale in St. Helena, and the results, both financially and otherwise, are satisfactory. The selected lands in this island are now well drained, and tramways are laid for the rapid conveyance of the leaves after they are cut down to the stripping mills. Sometimes aerial railways are used when a river has to be negotiated. It will be quite well understood that a cheap and rapid transport is a desideratum.

Only well-matured leaves must be cut down, and these are conveyed to the stripping mills; in the Manawatu district of New Zealand about fifty such mills are in existence, and the introduction of improved machinery for this stripping operation will certainly lead to the extension of the cultivation of these plants and to the after processes.

Much has been done to introduce an efficient machine for stripping the leaves, and many premiums have been offered by the New Zealand Government for a perfect machine. One now under trial gives promise of good results.

The greatest difficulty in connection with the stripping of *Phormium Tenax* leaves is due to the peculiar shape of the lower end of the leaf. A very deep midrib extends for some distance and gets more pronounced as the lower end of the leaf is reached. A large quantity of the fibre is collected in this rib, the shape of which makes it difficult for mechanical parts to treat successfully, and necessitates a larger amount of labour than in the case of straight or flat leaves of the ordinary type.

In former methods of stripping and cleaning it was

found necessary to paddock and bleach the stripped fibre, but the claims of the new invention, if sustained, will render these processes unnecessary.

The production of the fibre may reach 13 cwt., and 2½ cwt. of tow per acre during the life of the plants, while the stripper can produce from 20 to 25 cwt. of fibre per day.

The colour of the fibre is light yellow to brownish, but it is rather soft and dirty at the top end. It is graded as below—

91 to 100 marks = Superfine, 81 to 90 ,, = Fine, 71 to 80 ,, = Good Fair, 61 to 70 ,, = Fair, 51 to 60 ... = Common.

OTHER FIBRES.—The chief hard fibres are augmented by the use of the "Maguey" plant which is cultivated largely in the Philippine Islands in districts bordering on the Manila centres, while Mauritius fibre is produced largely in the Islands from an Agave, the Furcroea Gigantea, order, Amaryllidaceae, known in Mauritius as "Aloes." The plant, see Fig. 16, is somewhat similar to the Sisal plant, while the fibre obtained from it is of a soft nature, and is usually sent to this country in an imperfectly-cleaned state. The dust which accompanies the fibre emerges from it in the processes of manufacture, and is very disagreeable to the operatives. Owing, however, to its good light colour, and the softness and pliability of the goods made from it, the fibre is often preferred to the other hard fibres for certain types of work

Coir.—Coir fibre is obtained from the husks of cocoa nuts. The extraction of the fibre from these nuts forms native industries in many parts of India and Ceylon. The husks are soaked in water for a time, and then

beaten with sticks or mallets; the separated fibres are then dried and spun by hand with the aid of very



Fig. 16 *
MAURITIUS FEBRE FLANT \$

simple appliances. Afterwards, two of these single yarns are combined or twisted together to make what is known as two-ply or two-fold twist. The twist is

then made up into short lengths, rolled into small hanks and baled for export. Of later years, much longer lengths have been made and done up into coils, while small "dolls" or rolls are made up for sale in small quantities, particularly for use on farms.

Coir fibre has been very widely used for many purposes in the rope and cordage trade, principally for the manufacture of mooring ropes, spring ropes and lashing cords, while large quantities of the imported yarns are used for matting and farming purposes.

It is a very useful fibre when properly made up, and is of great importance for purposes where it is necessary for the manufactured article to be exposed to variation of climate and to wet, while the life of the manufactured article is greatly extended if it is steeped in oil.

SUNN HEMP (Bengal Hemp).—Sunn Hemp or Crota laria Juncea, natural order, Leguminosae, is used on a smaller scale and for certain goods such as cheap graderopes and box cord. The plants grow in several part of India, e.g., near Bengal, Allahabad and Benares in which the cheaper grades are produced, and in som districts of Western Bengal where a better class of fibr is obtained. All are of the same family, the difference being due to the variation of the soil and the method of retting. (This is really a bast fibre, but it is use almost solely along with the hard fibres.) The fibre-in harsh and very irregular in the lower grades; in the better grades it can be used to mix with other fibre for the production of tow yarns.

The other hemps obtained from India, particularl from Madras, are not so high grade as to warrant ther being used alone to any great extent, so it is usual t mix them with other low-grade hemps of higher tensil strength, or these Indian liemps may be combined wit scutching and hackling tows. The scutching an

hackling tows are sometimes used to produce twines and cords suitable for box cords and for parcel tying yarns.

CHINA JUTE.—Although this is a bast fibre, its use is mostly confined to purposes for which the hard fibres are applied, and hence its introduction amongst them. It is a product of Hankow and Teintsin in China, and is largely imported to Great Britain. When suitably treated it forms a satisfactory fibre for the manufacture of box cords or similar goods where great tensile strength is not essential. The fibre is of a good light colour, and little or no waste is incurred in its transformation into cordage.

The following details of the production of fibres and relative costs are given so that the normal values, as well as the normal quantities may be judged, and also compared with the abnormal conditions which have prevailed during the great world's war.

Italian and Naples hemp is imported to these islands in large quantities as will be seen from the following particulars for ten seasons—

Season,	Italian.	Naples.
1903-04 .	. 62,000 tons	28,000 tons
1904-05 .	. 40,000 ,,	23,000 ,,
1905-06 .	. 12,000 ,,	27,000 ,,
1906-07.	. 58,000 ,,	30,000 ,,
1907-08 .	. 58,000 ,,	31,000 .,
1908-09 .	. 41,000 ,	20,000 ,,
1909-10 .	. 55,000 ,,	24,000 ,,
1910 - 11 .	. 50,000 ,,	27,000 ,,
1911-12 .	. 33,000 ,,	30,000 ,,
1912-13	. 58,000 ,,	31,000″,,
-	10)467,000 . • • • • • 46,700 average	10)27 1,000 27,100 average

Average price P.C. Italian, 439 11s. 3d. per ton, P.E. Naples, 441 9s. per ton F.S.P.R.H. Russian, 431 17s. per ton

The prices since these dates have gradually increased, and the present prices are approximately as under---

P.C., Italian .				£190 per ton
P.E., Naples	•			£200 ,, ,,
F.S.P.R.H., Russian	•	•	•	£170 ,, ,,
China Hemp	•	•	•	£154

The following table illustrates the grading of Manila fibre for June, 1917, together with the number of bales for that month, and the percentage quantity of each grade. In addition, the last two columns give the prices; that for 1917 is the market price, while that for 1918 is the controlled price. Fig. 12 might be studied along with this table.

		,			
Grade Letter.	Grade.	Bales.	% of Total,	1917. Market Price per ton.	1918. Market Price per ton.
B Prim C Supe D Good E Midv S¹ Stree S² F Curr G Seco H Brov I Good I Fair K Med L Coar M Coar	rior Current l Current vay	899 2,182 6,852 10,020 17,358 1,865 3,937 2,935 22,284 3,908 1,886 12,791 113,561 4,226 12,780 5,140 7,153 4,306 3,159	• 2.3	£150 £145 £135 £130 £120 £115 £125 £115 £105 £85 £80 £78 £78 £75 £73	£155 £150 £135 £130 £120 £115 £105 £105 £105 £100 £15 £107 £107 £107 £107 £107 £107 £107 £107


The standardizing of the grades has been rendered necessary by the large amount of inferior fibre which was being produced, and by the irregular baling of the fibre. The gradual improvement of the fibre as a whole may be gleaned from the undermentioned particulars of the number of bales which were graded into four of the lowest types. These numbers referred to what were allocated in August and September, 1917, and it will be seen that there was a much smaller percentage of these low marks in September than in August.

Bales: August.	Bales: September,
10,548	7,462
	3,201 2,960
2,290	952
23,166	14,575
	10,548 4,553 5,775 2,290

The shipments of Manila and other fibres for six years, 1910 to 1915 inclusive, appear below—

¶'ear,	Manila bales.	Mexican Sisal bales.	New Zealand bales.	Mauritius bales.
1910	1,272,000	582,142	103,750	9,990
1911 1912	1,332,297 1,466,110	713,008 859,000	96,850 96,360	9,161 8,697
1913 1914	964,000 943,000	876,000 982,000	140,445 98,510	14,404 8,947
1915	1,160,440	950,000	116,100	6,838

The three columns in the following table show the

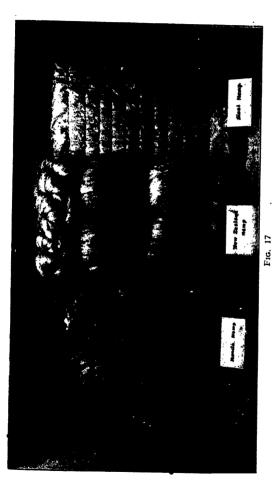

BALES OF MANILA, NEW ZEALAND AND SISAL FIBRES

54 CORDAGE AND CORDAGE HEMP AND FIBRES

prices which ruled in 1915 and 1916 and the current prices for 1918.

Type of Fibre.	1915.	1916.	1918.
	 £	£	£
P.C. Italian Hemp .	55	90	190
F.S.P.R.H. Russian Hemp			170
China Hemp			154
Manila (Fair)	37	54	100
New Zealand Hemp .	32	86	99
Mexican Sisal	28	77	97
Iava Sisal		95-100	99
Mauritius		70	95
Maguey	30	70	74

The controlled Government price (U.S.A.) for Sisal fibre for June (1918) is as follows—

19 cents per lb. for fibre

23 ,, ,, for 500 feet of binder twine

Since one sheaf of corn requires about one yard of twine, and since the expected requirements for the. Continent of America are 200,000 tons of binder twine, it follows that this weight of yarn will provide the binding material for 71,680,000,000 sheaves—almost an incredible quantity.

Fig. 17 shows three distinct methods of baling-

- (a) Manila Hemp with rattan canes.
- (b) New Zealand Hemp with ropes made from New Zealand fibre.
 - (c) Sisal Hemp with wire.



CHAPTER VII

THE PREPARING AND SPINNING MACHINERY FOR HEMP AND OTHER SOFT FIBRES

SINCE there is such a great variety of ropes, cords and twines, not only in regard to diameters, but also in regard to the different fibres used in the manufacture of these goods, it is not surprising to find that there are many different kinds of machines involved in the various operations; some of these machines are introduced for the special purpose of reducing the fibres to practicable lengths, but these machines are, of course, used only for the type of fibres which exceed about 36 in. On the other hand, it is sometimes found desirable to cut certain types of fibres which do not exceed the limits demanded by the capacity of the machines, but this is done only as a selective operation to obtain the best and strongest part of the fibre.

While certain classes of soft fibres such as Russian, French, Chinese and Indian hemps may be used without any previous hackling operation in the spinning of certain sizes of cordage, it is found that Italian, Serbian, Roumanian and Neapolitan hemps must be cut into suitable lengths and hackled before they can be passed through the preparing machines; in these latter machines the fibres are arranged into a practicable condition before they are subjected to the actual spinning operation.

The production of yarn for use in the making of cotton driving ropes involves the use of the whole system of cotton-spinning machinery, while, on the other hand, hemp yarns, besides being prepared mechanically, are

still produced by a series of the simplest and oldest methods of hand hackling and hand spinning.

Fine ropes and twines may, be, and often are, produced by an elaborate system of machinery, and modified forms of such a system, in which a smaller number of machines are employed, may be adopted for the spinning of the heavier yarns.

A complete plant for the manufacture of these yarns from soft fibres would include the following—

Softening Machine,

Cutting or Breaking Machine,

Hackling Machines,

Spread Boards.

Drawing and Doubling Frames,

Roving and Gill Spinning Machines,

Automatic Spinning Machines,

Throstle Spinning Machines.

The yarns employed may be as small as 60's for the finer sizes and as thick as 18's for the heavy or common sizes; the significance of this yarn numbering will be explained later.

In order to have some definite purpose in view, let it be assumed that it is necessary to make a high-class rope from Italian hemp; the fibre to be used must, of course, be of a good quality of cordage hemp. When the bale of hemp is opened, the fibre will be found to be in "heads" or "stricks," that is, collected into groups with a girth of from 8 to 12 in., and to be from 7 to 12 ft. in length and sometimes even longer.

The first operation is that known as "softening," which makes the fibres, as the name of the operation indicates, more supple, and hence better adapted for undergoing the subsequent operations. Different makes of machines are in use for softening the fibrous material, the chief feature in each machine is that

the heads or stricks of fibre are squeezed between fluted rollers.


In one type of maching the end of the strick is passed between the first pair of blades of an Archimedean screw, then between the fluted rollers of which there may be three, and its end brought round and joined to the other end of the strick; in this way an endless band of fibres is formed. The fluted rollers act as indicated, and at the same time the Archimedean screw gradually conveys the endless band of fibres from one end of the screw to the other end, each slight movement causing the fibres to enter between the fluted rollers at a different place. This type of machine, which is, however, rather dangerous for certain classes of workers, is considered quite efficient and satisfactory by many spinners, but the machine which is most extensively used is known as a "reciprocating softener," and is made by such firms as Messrs. Reynolds and Messrs. Combe Barbour. both of Belfast, and by Messrs. Lawson of Leeds.

The action of the rollers of the reciprocating softener is rather complicated, for, in addition to the usual method of rotating in one direction for the sake of delivering the material, the rollers are moved bodily forwards and backwards a short distance alternately. The multiplicity of motions has for its aim that of subjecting every particle of the strick as much as necessary to the softening action of the flutes; the effect of these operations on the hemp is quite evident when the stricks emerge from the delivery end, for the material is much more pliant than when it entered, and is in such a condition that it may be greatly refined in the subsequent operations.

In this machine the forward motion of the rollers is obtained by a special arrangement of gearing from the pulley shafe which extends through the machine and carries a further belt pulley at the other end. A belt from the latter pulley drives by means of another pulley an upper shaft, while a further belt connection from a pulley on this upper shaft conveys motion to a pulley running on a stud projecting from the main frame, Compounded with the latter pulley is the speed change, pinion, and a train of gearing, consisting of four pairs of compound wheels, conveys the desired motion to the fourteen pairs of fluted rollers which are arranged in two concentric semicircles in the upper part of the machine. The centre of these concentric semicircles is the central shaft of the machine, and on this shaft is placed the pinion and wheel of the second compound. Near the ends of this central shaft, and close to the outer part of the two main frames, swings two substantially-constructed brackets: each bracket has two horizontal arms from each of which a short shaft projects to carry a wheel and pinion, while the extreme lower end of the bracket is attached by means of a connecting rod to a crank placed on the large wheel below, and driven from, the main pulley shaft.

As indicated, this mechanism is duplicated, one set on each side of the machine. The object of the small pinions on the horizontal arms of the swinging brackets is to drive the fourteen pairs of fluted rollers through the medium of two large wheels, one on each side, each wheel being provided with internal teeth. The object of the cranks and connecting arms to the said brackets is to cause the fourteen pairs of rollers to reciprocate. This reciprocation adds to the effective softening of the stricks by rotating the material for a longer time in the machine, and thus repeating the softening effect of the rollers on different parts of the fibrous material.

After the stricks have been efficiently softened in one or other of the machines mentioned, they are conveyed

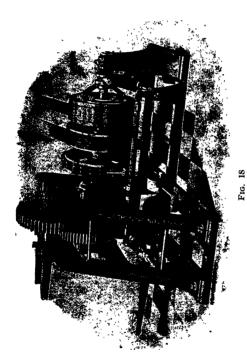

BREAKING MACHINE

to the cutting or breaking machine which is adapted to sever the stricks into lengths suitable for treatment in the hackling machine.

These cutting or breaking machines are of two distinct types—

- (a) Those in which the fibres of the stricks are torn asunder: and
- (b) Those in which the fibres are broken by the action of what are known as "cutting wheels."

A good example of a machine which tears or breaks the stricks is that illustrated in Fig. 18, and made by Messrs, David Bridge & Co., Ltd., Castleton, Manchester. The machine is of substantial construction, but experienced operatives are required to take charge of it. One end of the softened strick is wrapped round the back fixed square bar to the left of the illustration: then about two turns of the strick are wrapped round the front square bar which rotates when the attendant presses down the foot lever near the floor. Since the revolving bar has a tendency to carry the strick round with it in virtue of the movement given to it by the train of wheels from the motive part, it follows that ultimately the stretch of fibres between the two square bars will be broken, and then the operation is repeated with the remainder of the long strick. The friction clutch, on the right of the three pulleys, and the main shaft are revolving continuously while the belt on the middle pulley is in motion, but the friction pulley itself moves only when the friction clutch is expanded due to the downward movement of the foot lever which, at the same time, releases the brake on the left pulley of the three. When the foot is removed from the foot · lever or treadle, the clutch fork slides the clutch on the shaft and breaks the contact between the friction clutch and friction wheels simultaneously the brake grips its

pulley and thus arrests the wheels and the rotating square bar.

The cutting or breaking type is designed on quite different lines from the above machine, and a very popular and efficient machine of the former type is known as the "Revolving Cutting Machine." A series of round pins (sometimes V-shaped teeth) project from the face or periphery of a large central revolving wheel, and on each side of this wheel, and at a suitable distance from it, is a pair of slowly-moving rollers which are grooved on their circumferences to intersect with each other and so grip or hold the material as it is being fed to the pins of the cutting wheel. The operative cutter stands in front of the machine with a long strick of hemp in his hands. He grips the strick at two convenient places, and, having decided upon the point where the piece should be cut or broken, he arranges for this point to pass into the machine midway between the two pairs of feed or retaining wheels. The machine is made in duplicate so that the same cutting or breaking wheel may serve for both, but each operative has, naturally, his own set of feed wheels.

As already stated, the lengths of the pieces when broken or cut will depend upon the type of hackling machine in which the severed lengths are next to be treated, and also upon the particular class of rope into which the fibres are to be spun. The usual length limits are 24 in. and 30 in., although conditions might arise in which it is desirable to go beyond the extremes of these common lengths.

The suitable lengths of cut material are now made up into convenient sizes or bunches and conveyed to the machine hackling department.

Certain classes of Russian French, Chinese, Indian and Italian hemps may be considered in common in all

subsequent operations, and, in general, will require most of the treatment which is given to the specific case of Italian hemp under discussion.

The hackling machines which are used in modern cordage or rope walks are similar to that reproduced in-




Fig. 19

Edinburgh Ropery Co.

HACKLING MACHINE

Fig. 19. In this particular machine there are sixteen different holders with pieces of hemp fibre depending from each, the lowest visible part of the fibre being on the same level as the uppermost part of the hackles or tools. The visible parts of the latter extend to a point in line with the waist of the actendant. There are four sections of tools in the full width, and each section is made up of four sets, while each set contains twentyfour tools, the whole arranged in a closed path so that while they rotate, the pins in the tools may act upon

the pieces of hemp as the latter move in a vertical plane under the influence of what is termed the "head" of the machine.

The number of tools vary according to the accommodation available in the department devoted to this section of the work. The tools are fixed to a series of bars which in turn are rivetted to a set of leather sheets, the whole being rotated as indicated by means of carriers which are arranged on two shafts with suitable fixings.

In the "head" the necessary mechanical parts are placed for moving the holders, and therefore the pieces of hemp, collectively and intermittently along what is known as the "channel." The inclined rod, immediately under the name plate of the machine, with its additional parts convey this motion to each of the holders. In this manner, each holder, with its complement of hemp, is moved in regular succession opposite each of the sixteen sets of hackles or tools, and therefore passes from one end of the machine to the other. This movement takes place when the hemp is at or near its highest point. As each holder reaches the end of the machine, it is removed from the channel, the bolts of the holder unscrewed, the plate removed, and the piece of hemp turned end for end. After this the plate is again placed in position, the nuts screwed tight. and the holder entered into a similar channel on the other side of the machine, but with the undressed end of hemp downwards. A very similar movement is now imparted to the holders at this side of the machine so that the same process of hackling as that performed aiready may be imparted by an identical group of tools. The work is, of course, continuous in this respect that the girl or boy is almost constantly engaged with the attention of the holders as they reach the end in regular short periods of ten to fifteen seconds. The hemp ultimately reaches the end of the machine from which it started, but in a different plane, and is withdrawn from the holder to be replaced by an undressed piece.

Until a comparatively short time ago all the above operations of feeding were done by hand as explained. but most modern hackling machines have now attached automatic mechanism for performing these functions. The machine in Fig. 19 is provided with this automatic screwing and unscrewing mechanism. One attendant introduces the pieces of hemp between the plates of the holder when such plates have been separated by the apparatus, but from this point all the operations, including the removal of the holder, the turning of the piece of hemp, the unscrewing and screwing of the nuts, and the insertion of the holder with the unhackled ends downwards into the second channel, are performed by this ingenious group of automatic machinery. design of such machinery differs with different machine makers, but very similar principles are embodied in all. The ends of the backling machine frame are in all cases substantially made so that all parts may give the minimum amount of trouble in actual work.

The size of the pieces which are held by the holder and acted upon by the tools during the operation of hackling will depend upon the class of yarn to which the fibre has to be spun. As a general rule, the pieces for rope and twine yarns are arranged so that there are two to four per pound; in other words, the pieces are from 1 lb. to 1 lb. each. It must be remembered that the finer the quality of yarn desired, the more hackling must take place, and hence it will be necessary to use a hackling machine with finer tools, and also to employ more tools in a row.

As a general rule the best yield of fibre is obtained

when the maximum number of tools are used, but at the same time it is necessary that the grading of the pins or hackles in such tools should be judiciously chosen in order that the splitting or cutting should be gradual, and thus exercise a less violent action on the fibre than would obtain with an indifferent grading.

In addition to the grading of the pins, advantage may also be taken of what is known as the "grouping," that is, the order in which the pins are arranged on the The grouping is of the greatest value in the coarser-pitched tools, and although some hackling experts prefer to have the pins in two rows on the finest tools, the Authors consider that when all the pins in the finer tools are in one row, the work is done better for the line, and the tow produced is of good quality, while such an arrangement offers the best and most economical facilities for keeping the tools in good condition. A good arrangement of grading and grouping on ten tools may give a greater variation in the splitting or cutting than would result from an indifferent arrangement of grading and grouping on a larger number of tools.

Three different arrangements of grading appear below—

Number of pins per inch width of tool

•		ł		ł		3	1	1 1	2		4		6		8	10 = 10	tenle
ł		Ĭ	1	ĩ	3	•	1	1 🥉	2	3	4	5	6		8	10 = 14	,,
Ĭ	ł	ł	ł	Ī	3		1	1 1	2	3	4	5	6	7	8	10=10 10=14 10=16	,,

All modern hackling machines should be arranged to give the best possible yield of line, and also of tow, from the material which is in process, since by this effort an increase in the relative value of the finished article is obtained, and a highly-valued product secured at a comparatively low cost of manufacture.

As the pieces of hackled hemp are delivered from the

hackling machine, they are made up into suitably-sized bundles and conveyed to the line store.

A record of all the materials in the various stages of manufacture is kept in the books of the respective departments, and such records can quickly be referred to at any time by those who are responsible for the production of the various classes of goods which are being made.

As already indicated, certain classes of hemp may be so clean when purchased, that they can be used for some types of cordage yarns without any preliminary hackling, and goods made in this way may compete favourably with those made by processes which include hackling. The object aimed at in these cases is usually one of price and not exactly of quality, for when the latter is the predominating condition, the superior value is attached to the yarns made from hackled fibre. Nevertheless, when it is simply a question of equivalent suitability for specific purposes, and when approximate values are obtainable by the two methods of manufacture, the conditions offer a choice which is of extreme importance at those times when the available suitable fibre for either method is scarce, or when either is very abundant.

Although the above choice presents itself for the cases mentioned, it will be understood that for the better grades of cordage one must employ either a very high grade of cleaned hemp, or a grade of hemp which has been hackled and cleaned by hand or by suitable kinds of machines.

In very special cases, e.g., high-class threads and cord yarns, where great strength and uniformity are desired, it has been found advisable to prepare the fibre entirely by a system of "hand dressing.". The hand method lends itself naturally to more careful selective

treatment. It should, however, be stated that it is not usual to adopt this method except for the production of a comparatively small quantity of fine yarns, that is, thin yarns. Sewing twines and cords should be level and strong, but not necessarily fine, unless for the finest class of work into which these threads are to be introduced, as, for example, in the glove industry in which case the fibre used is often flax. These finer grades of threads and twines, as well as the finer classes of cordage, may require the whole range of operations to produce the finest and cleanest product consistent with the work for which it is intended to be used, although, as stated, the hand hackling may be employed for the flax intended for use in the manufacture of fine thin yarns, whereas, it is preferable to employ machine hackling for the equally valuable but thicker yarns. From this stage, however, the operations for the continuation of the processes of manufacture from the two distinct types of dressed line are conducted mechanically.

In perhaps the most extensive scheme of hackling there is a combination of hand and machine work. The first operation is termed "Roughing," and consists of drawing the pieces of hemp or flax through a set of hackle pins arranged or grouped in a wooden block, and termed a "Rougher's Tool." This operation, when correctly performed, leaves the fibres practically parallel, their ends approximately in line with each other, and separates these long fibres from the shorter ones which are left amongst the hackle pins, and which are removed regularly to be ultimately used as "tow" in what is known as the "carding" process. These long, partially combed and split fibres are now taken to the hackling machine to undergo a further treatment of combing and splitting as already briefly described. Finally, when the pieces leave the hackling. machine they have to undergo for a second time a hand process of hackling which is termed "Sorting and Selecting," after which the material is made up into a bundle.

It is obvious that such an extensive scheme of hackling is not only slow but also costly, and is attempted only for the most valuable raw materials to be used for costly finished goods such as fishing lines, fine cords, and for valuable threads which are used in the glove, leather and cognate industries.

It will thus be seen that there are in reality three distinct methods of preparing the fibres into the product known as "line," and the finished product thus obtained then passes through a series of machines. termed a "system," in which the fibres are first arranged in such a way as to form a continuous thin and broad ribbon termed a "sliver," then into a more or less circular and slightly-twisted form termed a "rove," and ultimately into a much finer circular and twisted form termed a "yarn" or "single thread." Rope and heavy cordage yarns are often made by a simpler process than that just enumerated. The operations which these varns or single threads subsequently undergo will be discussed at the proper place. In the meantime we purpose mentioning the different machines, and then briefly to describe and illustrate these machines which jointly form what we have called a "system."

System I for	System II for	System III for			
Kine Classes of	Heavier	Common Yarns			
Line Yarn.	Line Yarns.	from Tow.			
Spread Board Sett Frame Drawing Frame Roving and Gill Spinning Dry Spinning	Spread Board Sett Frame Finishing Drawing Frame Automatic Spin- ning	Carding Machine Drawing Frames Roving Frame Dry Spinning or Automatic Spin- ning			

The machine known as the "spread-board" is so called because the function which it performs is the mechanical sequel to the manual operation which was conducted somewhat as follows: A board about 9 ft. long was covered with an even layer of the pieces of hackled flax or hemp so arranged that each succeeding piece partially overlapped the one immediately before it much in the same way, so far as overlapping is concerned, as obtains with the scales of a fish or the parts of a fir cone. One operative would place his hands on the material thus arranged, while another operative would draw forward the material, reducing it in girth but increasing it in length, by causing some of the fibres, and all of them in turn, to slide a distance on their neighbouring fibres. At the same time the drawnout material would be kept as uniform as possible in thickness, and the operation would be continued until the thin drawn-out length was probably five to ten times the length of the more bulky material which was originally laid as explained on the board.

The modern technical term for this elongation or attenuation of groups of fibres is "drafting," and the dual operation described above is now performed in the modern spread-board, the delivery end of one of which is illustrated in Fig. 20.

The use of the spread-board is rendered necessary because the pieces of material from the hackling machine are made up of individual and comparatively short lengths of fibre, and the essential object for the satisfactory continuation of the processes of manufacture is to convert these short lengths into a continuous length termed a "sliver."

The pieces of hemp or the like are first weighed in a balance near the feed end of the machine, and are then arranged by hand on narrow endless travelling belts,

termed "spread leathers," so that the thin end of one piece of hemp is overlapped by the thick end of the next piece and so on. These "spread leathers" form



SPREAD BOARD '

, the moying bases of narrow channels, the sides of which keep the pieces of hemp in their own channel. But instead of only one row of moving fibres or pieces as in the primitive process, there may be four or six of the above-mentioned channels.

The neatly-arranged pieces in each channel are carried forward slowly but continuously, each group by its own endless belt, until all the groups reach the first pair of rollers called the back or retaining rollers. After the pieces leave these rollers they are penetrated by a large number of pins or hackles arranged on what are known as "gills" or "fallers." There may be four or six gills on each faller, and the fallers rise in turn to cause the pins to enter the narrow sheets of fibres, to join the faller which immediately preceded it, and to move along with the majority of the fallers in a body towards the drawing rollers. In the spread-board illustrated in .Fig. 20 there are four channels, and therefore four pressing rollers in contact with the drawing roller which extends the full width of the machine; all the four pressing rollers are distinctly shown near the upper part of the illustration.)

It will be understood that the four narrow sheets of fibres will ultimately reach the drawing and pressing rollers, and since the surface speed of these rollers is much greater than that of the back or retaining rollers, the fibres which are clear of the grip of the retaining rollers will slide on those whose movements are restrained by the rollers and gill pins, and since there is always a quantity thus liberated, the draft is accomplished according to the relative speeds of the two sets of rollers. The effective contact between the rollers for drafting is obtained by means of levers two of which are shown near the floor and to the right of the sliver can in Fig. 20.

The gills or fallers are moved forward by spirals or screws and at practically the same surface speed as the "spread leathers" and the retaining rollers; as each faller reaches its full forward position, it is caused to move downward and then backward in a lower plane,

⁶⁻⁽¹⁴⁶⁵F)

and ultimately to rise again to enable the pins to enter into a fresh portion of the sheet of fibres; after this cycle is completed, the same functions are repeated while the machine remains in motion.

The four slivers which leave the drawing and pressing rollers unite into two pairs through the medium of doubling plates; one pair of slivers thus united is guided to a conductor, and then passes between the delivery rollers and into a sliver can shown in the foreground of Fig. 20, while the other pair, part only of which appears in the illustration, follows a similar course into a neighbouring sliver can.

The extent to which the fibres are drawn out in theo spread-board, that is, the draft of the material, varies from about ten to twenty.

The gradual tendency to call into action mechanical parts to perform work which was originally done by hand is further emphasized in the latest attempt to feed the above-mentioned short pieces of hemp or the like automatically from the hackling machine to the spread-board. This ingenious device, the invention of Mr. Joshua Eves, of Belfast, carries the hackled pieces from the holders of the hackling machine and lays them on the "spread leather" in the channel, and, in addition, it is provided with a regulating device to preserve as near as possible uniformity in the thickness of the resulting sliver which, as usual, is delivered into sliver cans as already described.

Even with the greatest care, the most efficient type of machine and the finest stage of hackled fibre, it is practically impossible to achieve an absolutely uniform sliver. In order, therefore, to approach a practicable ideal sliver, it is usual fo resort to a process of "doubling" and a further operation of drawing, indeed, the next machine to which the slivers pass is termed a

"drawing frame." Before dealing with this machine, however, it is desirable to discuss another distinct method of forming the initial sliver from fibrous material. •In general, the sliver prepared by the spread-board is intended for the production of level and high quality varns, but it is evident that, during the operations of scutching and hackling, a certain quantity of the shorter fibres will become detached from the main body of the strick. These shorter fibres, termed tow, are not only weaker than the line fibres but are also accompanied by impurities which must be removed in the subsequent operations; they are graded according to quality, and ultimately treated by a distinct method which, however, prepares them into a sliver very similar to that which emerges from the delivery rollers of the above-described spread-board. Then, as already mentioned, the after processes for both types of sliver are practically identical.

The conversion of this tow into a sliver takes place in what is known as a "carding" machine. This is a particular construction of a general type of machine which is used for the same purpose in most textile trades where comparatively short fibres have to be converted into sliver form.

The function which the card—a contraction for carding machine—performs is to split up the fibres and to lay them parallel with their neighbours; for this purpose the machine is provided with a series of rollers which are covered or clothed with sharp pointed pins, the size, direction and inclination of which depend upon the particular work which each set has to perform. A set of cards comprises two or more machines each of which differs slightly from the others, and invariably arranged so that succeeding machines in a set are provided with finel clothing, i.e., smaller and shorter pins and more closely set. The simplest set is where two

74 CORDAGE AND CORDAGE HEMP AND FIBRES

machines are involved, the first one termed a "Breaker Card," and the second one termed a "Finisher Card." In both machines a series of comparatively small rollers, say from 8 °0 20 m. diameter, and covered with pins, are arranged partially round and close to a large central roller of 4 to 5 ft. diameter, also covered with pins and termed a cylinder. The general appearance of the



Fig. 21 BRI AKER AND FINISHER CARDS

machines will be gathered from the two rows in Fig. 21; the nearest machine on the left shows the delivery side of a breaker card where the sliver is delivered into a can; the nearest machine on the right illustrates both field and delivery sides of a finisher card.

The tow, which has been previously softened, is laid as evenly as possible on a travelling endless sheet by means of which the fibrous material is carried to the pins of the "feed toller" which rotates very slowly

and at the same surface speed as the feed sheet. Immediately the material emerges from the feed rollers, or feed roller and "shell," it is acted upon by a series of hackle pins projecting from the periphery of the cylinder, and moving at a surface speed of more than 2,000 ft. per minute. The fibres are therefore combed and carried off the pins of the feed roller by the pins of the cylinder to a series of rollers arranged in pairs, each pair consisting of a "worker" and a "stripper." When the fibres on the pins of the cylinder reach the irst pair of worker and stripper, the bilk of the material s carded and ultimately returned to the pins of the cylinder to be carried to the next pair of rollers, and so in, until it has been sufficiently equalized and cleaned or the particular varianto which it is to be made.

By this time the uneven fibres have been considerably educed in thickness, and have nedeed been converted nto a thin wide film or sheet of fibrous material, and n this state it is removed from the purs of the cylinder by the pins of a "dotting roller" or "doffer." The thin, broad film of fibres now enters between a pair of drawing rollers, seen near the top of the machine on the left in Fig. 21—and into the upper and wide part of an almost vertical tin conductor. The width of this conductor decreases from the upper to the lower end, and ultimately its width is contracted to about 3 in. where the contracted sheet, now much thicker and about 3 in. wide, is in the well-known form of a sliver. The sliver emerges from the mouth of the conductor, enters between the delivery rollers and ultimately drops into a sliver can in a very similar manner to that depicted in Fig. 20.

About ten or twelve of these sliver cans from the breaker card are now transferred across the space, termed a "pass," to the feed of the finisher card on the

We have thus arrived by two several ways at the production of a continuous sliver. Both types of sliver pass next to what is known as a "Drawing Frame," or rather to a set of drawing frames, usually termed, first drawing, second drawing, third drawing, and so on, if more than three are employed.

The machines used for the two kinds of slivers are practically identical in principle and construction, the only difference being that provision is made to suit the lengths of fibres of which the respective slivers are formed; in technical phraseology the "reach" for the line sliver is longer than the "reach" for the tow sliver and is, approximately, proportional to the maximum length of fibres which compose the two types of sliver.

It will be understood that, in general, the ultimate aim is the production of a thread of some kind, the sectional area of which is less than that of the sliver which is produced either at the spread-board or the finisher card. And it will be obvious that if we unite two or more slivers at the feed side of the "Drawing Frame" we increase the thickness or volume proportionately; hence, if the sliver which is delivered from the drawing frame is required to be smaller in volume than any of the single slivers which enter the machine, and this is generally the case, although not universally

 $^{^{1}}$ For an exhaustive description of Carding see the Authors' work one full and Jule Spinning: $P^{\dots B_{T}}$

so, the process of drawing out the fibres, or drafting, must be continued. In the first drawing frame uniformity is chiefly the object, and it may happen that in the combined processes of doubling and drafting it may be convenient to produce in this frame a sliver of greater volume than the individual slivers at the feed. In such cases, most of the drafting would take place in the succeeding drawing frames.

The first drawing frame is often termed a "Sett Frame," and sometimes a "Doubling Frame," The first-named of the three owes its designation to the process of attenuation or drafting, the second to the number of slivers which in the process are employed to form one sliver, and the third to the particular case where two slivers only are united. Although the exact meaning of doubling is the combination of two slivers, the same word is used however many slivers are combined in one group.

The drawing frame has a great resemblance to the spread-board, so far as the principles of the operations are concerned; it differs from it in the fact that whereas the latter is fed by short detached lengths, the former is fed by continuous slivers.

The length of sliver which is delivered from the spread-board is measured; this is accomplished by the size of one of the drawing rollers and the necessary subsequent mechanism; these jointly cause a bell to ring, or to move a hand over the face of a clock. The length thus indicated is called the "bell or clock-length," and whichever system is adopted, the operative receives a certain weight of material which must be fed into the machine between two consecutive ringings of the bell, or during the time that the clock hand makes one complete revolution.

The case are weighed as they are filled and the net

weight of the sliver marked on. After a sufficient number of cans have been filled, say eight, averaging 20 lb. each, or 160 lb. in all, and the length of sliver in each can, say 250 yd., eight cans are placed at the feed side of the drawing frame. The average weight of the combined slivers on entering the drawing frame is therefore--

160 lb, × 16 oz, per lb.

250 vd. length If the draft is, say 12, the 160 lb, of material when delivered in the form of a single sliver will be-

= approximately 10 oz. per vd.

250 yards \times 12 draft = 3.000 vd.

Then

160 lb. + 16 oz. per lb.

= 0.85 of an ounce per yd. 3,000 vd. of sliver

The operation of drawing is conducted as in the spread-board by means of retaining or back rollers, gills, drawing and pressing rollers. It should be again pointed out that the distance between the retaining rollers and the drawing rollers -termed the "reach"should be regulated by the length of the fibres under treatment, and should be greater than the longest individual fibres, otherwise such fibres, instead of sliding on those already held, would obviously be broken because the surface speed of the drawing rollers is much Ereater than that of the retaining rollers; in the case under notice the ratio is 12 to 1.

The best scheme yet devised for filling up this intervening space between the two pairs of rollers, and of providing support for the moving fibres is that of the above-mentioned gills. The use of gills in the machine is of great importance, for on the correct adaptation of the gills to the material in process depends the degree of efficiency of the machine.

As the gills move from the retaining rollers towards the drawing rollers in virtue of the action of suitable spiral or other mechanism, each group forms a compact sheet or field of hackle pins, and this field of pins regulates and restrains the movements of the fibres to the requisite extent as the latter move amongst them due to the pulling action of the drawing rollers.

In this way each individual sliver in its own set of pins is reduced in size, and any local defect in a sliver is calculated to be overshadowed or eliminated when the said sliver joins the remainder of the slivers at the "doubling plates" which are situated between the drawing and the delivery rollers. The result is, therefore, a single sliver of greater uniformity than an y of the constituent slivers, such sliver being smaller, equal to, or greater than, any of the individual slivers from which it has been made according to the ratio of the doublings and draft.

A series of drawing frames in system as illustrated in Fig. 22, will provide the necessary doubling and drafting, and so reduce the sliver to a suitable size for use in any of the following yarn-forming or spinning machines—


(a) The Roving Frame which would be used to convert the sliver into a somewhat circular form, and simultaneously to wind this twisted sliver on to a large two-ended bobbin ready for the spinning frame (dry spinning).

(b) The Gill Spinning Frame which is a machine by means of which very high-class yarns can be produced with a perfect system of drafting and twisting in one operation.

(c) The Automatic Spinning Frame in which the heaviest class of cordage yarn is spun by the simplest and most direct method.

80 CORDAGE AND CORDAGE HEMP AND FIBRES

The roving frame is one of the most complicated groups of mechanism and one of the most perfect machines which is used in the whole system. Its function is of a multiple type, for the mechanism of the machine not only necessitates the use of retaining rollers, gills and drawing rollers to effect a draft, but




DRAWING FRAMES

* *after the reduced sliver has been passed through the delivery rollers, it introduces a certain amount of twist to the sliver—incidentally making it somewhat circular in section—and finally winds the twisted sliver, termed "raye," on to a large bobbin.

The method of drafting has already been briefly described, hence, no recapitulation is necessary. The sessential amount of twist for each individual sliver is imparted by its own spindle, an upright rod which

rotates rapidly, and upon which the large bobbin runs or rotates loosely, while attached to the top of the spindle is a "flyer" resembling an elongated inverted U, thus: 10. Most of these parts are clearly seen in Fig. 23, which represents, of course, the delivery side of the machine. At the other side of the machine,



ROVING FRAME

the feed side, there is a sliver can with its sliver fere each thread and bobbin, the bobbins being arranged in two rows upon discs in corresponding holes in the long shelf, termed the "lifting rail," the "builder rail," or simply the "builder."

The extreme ends of the two legs of the tiver are bene to form eyes, and into one of these eyes the twisted sliver is passed, while between this eye and the delivery rollers the sliver is centralized by passing it through a

guide eye. The function of the eye in the flyer is that of guiding or winding the rove on to the bobbin, and this is made possible because the bobbin itself is made to rise and fall between the legs of the flyer through a distance equal to the length of the bobbin—hence the necessity for the long legs of the flyer or inverted U.

The spindles and bobbins are driven independently and positively by wheel gearing, and it is obvious that the rove must be wound on to the bobbin at the same rate as it is produced. Since the speed of the drawing and delivery rollers is constant, the delivery of the sliver is constant, and so is the production of rove. although the length of rove delivered is infinitesimally less than that of the shver in virtue of the small contraction which takes place during the twisting. If the diameter of the rove on the bobbin always remained the same size, which is obviously impossible, the revolutions of the bobbin would be constant. But every layer of rove which is wound on to the bobbin by the joint action of the rotating spindle, the rotating bobbin, and the vertical movement of the bobbin on the builder, adds for each vertical movement, up or down, one more layer of rove to the partially-filled or empty bobbin, and thus increases the diameter of the combined bobbin and rove. Hence it is necessary to impart what may be termed an intermittent and variable motion to the Bobbin; this is done by an exceptionally unique and intricate group of mechanical parts termed the "differential motion." The function of the differential motion is to alter the speed of the bobbin after each complete layer of rove has been wound on to it, because it will be clear that when the direction of the builder is changed, the winding of the rove is performed on a dameter which is greater than the last by approximately twice the diameter of the rove. The discs upon which the bobbins rest are provided with two vertical pins which enter two of the holes in the flange of the bobbin, seen clearly in the empty bobbins near the frame, and by means of which the bobbins are driven at the desired speed. Accurate adjustment of the parts is necessary, and a lengthy description with numerous line drawings are essential to a clear understanding of this ingenious mechanism.

SPINNING.—The bobbins filled with rove yarn, as illustrated in Fig. 23, are ready to be removed or "doffed," as the operation is technically called, preparatory to being taken to some type of spinning frame where a further extension or "draft" of the yarn takes place, and simultaneously the finished product of the desired thickness or "count" is wound upon a much smaller two-ended bobbin.

A large-used type of dry spinning frame is illustrated in Fig. 24, and this type of machine is usually employed for spinning yarns the "counts" or "sizes" of which are represented by the numerals 3 to 16. Yarns which happen to be of lower or higher count than these limits are produced on other similar or different type of machine.

In Fig. 24 the large rove bobbins are seen distinctly on projecting pins—termed a creel—at the top of the machine. Each rove from its bobbin, which can rotate freely on its peg, is passed between retaining rollers, and over what is known as a "breast-plate," through the contracted groove of a "tin conductor," between a pair of drawing rollers, through a slot in the

¹ Readers who are sufficiently unterested in this and several other machines which are briefly described in this work, might consult the following works of the Authors, which are at present appearing serially, and which will be published in book form, when completed: "Late and Jute Spinning": The Textile Manufacturer; "Flax and Flax Spinnings": The Textile Recorder.

"thread-plate," through an eye in one of the legs of the flyer, and ultimately on to the bobbin which rotates on a spindle upon the upper end of which the flyer is fixed. In "long-reach" machines it may be necessary to use




Fig. 24

DRY SPINNING FRAME

additional rods or binders which act as auxiliary breast-plates.

All the spindles on one side of the frame are individually driven by flat tapes or round bands from a driving tin cylinder situated near the floor and inside the frame as shown in Fig. 24, and driven direct from the main pulley. The flat tape or band passes partially round this cylinder, and then partially around the wheal?

or bobbin-shaped pulley of about 1½ to 3 in. diameter on the spindle; these whorls and tapes are seen clearly on the first three spindles in the illustration, and in the same line as the "temper weights." The latter hang from cords attached to the back of the "builder" which imparts the up and down motion to the bobbins during the operation of spinning, and so enables the yarns to be distributed over the full length of the bobbin. The cord which is attached to the temper weight is caused to bear on the grooved flange of the bobbin, and by moving the cord into successive grooves or notches in front of the builder as the bobbin fills, a greater part of the groove is acted upon by the cord and weight, and thus the drag is increased.

Demi-sec spinning, as the name implies, refers to a process between dry spinning and wet spinning. In the demi-sec frames a slight quantity of water is added to the drawn-out and partially-twisted threads as the latter pass from the drawing rollers to the flyers. The purpose of this moisture is to smooth and lay the hairs of fibre which would otherwise project from the main body of the yarn as in the case of dry-spun yarns. It is usual to apply this method of spinning to thread yarns.

The draft necessary for converting the rove to the desired size or count of yarn is regulated by changings the value of the gearing, the wheels of which are enclosed in the oval covering at the end of the view in Fig. 24; near this covering is also seen the heart-shaped cam, lever and rod which are used for operating the builder.

GILL SPINNING.—In the ordinary spinning frame the material supplied is from rove bobbins, but in the sill spinning machine, the material is supplied as a sliver from a sliver can, one for each spindle. The gill spinner

86 CORDAGE AND CORDAGE HEMP, AND FIBRES

has a drawing head similar to that in a roving frame, and the spindles and flyers are usually driven by bands. The machine used for gill spinging might be compared with a roving frame with or without the winding motion or differential gear.

CHAPTER VIII


THE PREPARING AND SPINNING MACHINERY FOR MANILA AND OTHER HARD FIBRES

THE method of producing yarns from the hard fibres involves the use of quite different machines in the preparatory processes; this departure is necessary on account of the nature of the material and the length of the raw fibre.

The bales of raw material, Manila, Sisal, New Zealand, or the like, but all from one type in general, are arranged in a convenient position near the feed of the first machine which is called a "Hackler and Spreader," and one type of which is illustrated in Fig. 25. The bales which are grouped together for this first treatment are chosen from different "marks" or grades of fibre in order to mix them to secure uniformity and to produce yarns of a given quality at the desired price.

The heads of material are split up into suitable and uniform stricks, and when various classes are to be mixed it is essential that proportionate quantities should be drawn from the various bales in the "batch" or blend, and fed proportionately and uniformly on to the feed sheet of the machine. The feed sheet conveys the stricks slowly towards and ultimately between a pair of retaining and seed rollers, and when the material emerges from these rollers it is acted upon by a series of large hackle pins fixed in a chain of fallers or bass. These pins move at twice the speed of the feed and retaining rollers, and this relative movement enables

the pins to hackle and open out the stricks. The partially-hackled stricks are now conveyed to a second chain of fallers and hackles which move at a much greater speed than that of the first hackles; it is here where most of the drawing takes place, and the material



HACKLER AND SPREADER

as it leaves these hackles is in the form of a thin sheet of fibres which enters a pair of drawing rollers. Finally, the material is delivered on to the floor in the form of a sliver and at the opposite and of the machine.

The bundles of sliver are conveyed to another machine? termed the intermediate machine, where further processes of equalization and drawing take place. In this, and in any subsequent machine of the same type, of

which there may be three or four, the slivers are fed as illustrated on the left of Fig. 26, while several lengths of slivers appear in the foreground. After the drawing and hackling operations, the sliver is delivered as illustrated. These processes prepare suitable slivers for the remainder of the operations which are somewhat




FIG. 26
INTERMEDIATE MACHINE

similar to those which are used for the soft fibres, although the "reach" in the machines for the hard fibres is very much longer than that necessary for the soft fibres. In the final preparing machine, the sliver is delivered into sliver cans which are then taken to the automatic spinning frame.

AUTOMATIC SPINNING MACHINES.—A row of automatic spinning machines is illustrated in Fig. 27. The slivers



AUTOMATIC SPINNING MACHINE

from the last drawing frame are placed at the feed, one sliver can with its length of sliver for each machine. The sliver is passed through the first conductor, situated about a yard above the sliver can, and then between a pair of feed rollers seen to the right of the machine. From here the sliver is deflected to the proper bell-mouth conductor and to the long stretch or reach of gill pins shown clearly in the view. On emerging from the gill pins, the sliver passes through a nipping die and thence to the enclosed fiver from which it is wound on to the bobbin.

The drafting is accomplished by a series of rollers or pulleys which draw the tibres through the gill pins and the nipping die, while the twist is imparted as usual by the flyers which revolve at about 1,400 revolutions per minute. The flyers are now enclosed in a safety cage of about the same width as the name plate.

The yarns thus spun are built upon large steel-ended bobbins which, when filled, may be conveyed direct to the transferring or warping machines where the yarns are prepared for further treatment, if and when any further treatment is necessary, or to the rope machines. Thus, if the yarns are to be made up into a tarred rope, it is necessary to prepare them into a suitable form for the tarring operation. This usually takes the form of a warp, and such warps are most satisfactorily made on a warping mill or winding reel. It is usual to run twelve threads from twelve bobbins and to make the warp a suitable size by continuing the operation of warping in the same way as is done for warps which are to be woven in a loom.

The warp is then passed through a tarring machine in which the tar, usually Russian or Swedish, is kept warm during the operation. After the necessary amount of tar has been applied, it is usual to store the warps

92 • CORDAGE AND CORDAGE HEMP AND FIBRES

of yarn for a lengthened period, say up to six months, to condition them. The individual yarns from these warps are then rewound on to twelve large bobbins in what is known as a 12-bobbin vertical spindle-winding machine.

CHAPTER IX

TWINES, CORDS AND LINES

THERE are many instances in which yarns made by the foregoing operations are incorporated in twines, cords and ropes, while, on the other hand, special types of machinery are utilized to manufacture certain grades of such goods with an entirely different system of machinery. It is in connection with the latter branch that this chapter will for the most part treat, but. before dealing with these machines for specific purposes, we might just say that there are huge quantities of yarn spun by the methods already described, and the single yarn so spun is then twisted so that the resulting compound may contain two single threads twisted together, or any other greater number twisted either in one operation, or two or more separate operations, to obtain the desired type of cordage. In many cases The yarns have to be bleached before they are twisted, and F.g. 28 illustrates the drying of bleached yarns.

The terms twine, cord and rope all indicate to the textile technologist a multiple structure, that is, an article in which two or more single threads are united by the process known as doubling, folding or twisting.

Thus, in the manufacture of twines, of which there is a great variety, the process is a comparatively simple one. A number of bobbins are arranged on pins in a creel somewhat similarly to those illustrated in the spinning frame in Fig. 24. The requisite yarns, from 2, 3, 4 . . . n bobbins, for the type of twine in process are led from the bobbins through an eye or guide or through a "register plate," then between a pair of

drawing rollers, and thence to the flyer and spindle as in the spinning operation. As the spindle and flyer rotate, the group of single yarns are drawn through the guide or eye, or through the register plate by the drawing rollers, and the necessary amount of twist applied before the finished product is wound on to the bobbin. The amount of twist, or the technical term "twist per inch," is fixed by the speed of the spindle and the delivery of the yarn by the drawing rollers. In other words we have—

revs. per min. of spindle the number of turns per delivery of twine in in. per min. in. or the twist per in.

There is this difference between spinning and doubling or twisting; when a thread breaks in spinning, the supply of varn to the bobbin ceases, and the production from that spindle stops until the broken thread is repaired; on the other hand, when two or more threads are being twisted together and wound on to a bobbin. it is evident that if one thread breaks the supply is not stopped entirely, but the product is defective because it is short of that yarn. In order to prevent the production of faulty goods and to minimize waste, it is a common practice to introduce delicate mechanical parts to such frames, the function of which parts is to stop the delivery of yarn to any spindle in connection with which any of the constituent threads are broken. A frame so fitted is said to have an "Automatic Thread Stop Motion."

In many cases the twines made by the above process are taken to another machine in which a number of bobbins are again arranged on pins, the twines passed under rollers and immersed in polishing mixtures starch os size contained in troughs or boxes. A quantity of the size adheres to the twines as they pass the size in a revolving brushes are used to remove the cinesa.



DRYING BLEACHED YARNS

of size and to clean the twines. These operations are repeated a few times and ultimately the twines so starched, cleaned and polished are led over drying cylinders in front of which are placed rollers covered with suitable material, usually coir yarns. These rollers rotate at a high speed, and sometimes wax is applied to the coir varn-covered rollers, so that the twines are dried, polished and finished simultaneously before they leave the hot cylinders to be wound on to a second set of empty bobbins. This machine is usually termed a "bobbin to bobbin polishing machine," and the bobbins upon which the twine is finally wound are frictionally driven because the delivery of twine is constant. In this way the requisite finish or polish is applied to the surface of the twice, and this gives the twine the smart appearance which makes it quite attractive.

In the operation of twisting single yarns, that is, in the roving frame and in the spinning frame, it is usual to impart what is known as a "right twist." Thus, if one looks down on a spinning or roving spindle and the direction of rotation is clockwise, then the twist imparted is right hand. On the other hand, if, when viewed from the same position, the spindle rotates counter-clickwise, the definition is "reverse" or left-hand twist. When two single threads of right-hand twist are combined in twisting as in the formation of the above-mentioned twines, it is usual for the doubling or twisting spindles to rotate counter-clockwise. is done for practical reasons which need not be discussed here, but, although this is the usual way, there are cases in the twisting of textile threads where two righthand twists are combined with the same direction of twist. Some such definition as the above will help considerably to elucidate the structure of more complicated multiple-twist cords.

CORDS.—In the manufacture of cords, three or morestwines are combined. Thus, if three twines, each of reverse or left-hand twist and made from two single yarns of right-hand twist, are combined together by a further process of twisting, it is usual to apply a right-hand twist to these three two-ply twines. When treated in this way, the finished article is termed a cord which is "cable laid." And, in general, in the twisting of such cords, each successive twisting operation is in the opposite direction to that which immediately preceded it.

Whip-cords, fishing lines and window-blind cords are typical of this structure which, in general, involves the use of complicated machinery or else a long rope walk. The single yarns are first made into twines and finished as already described; afterwards the necessary number of twines to form the cable-laid cord are united.

The operation is a costly one when compared with the simpler process of twine making, but the cable-laid cord is a much more handsome product than the twine, and is admirably adapted for purposes where a smart compact and ornamental structure is desired or necessary.

Box Cord.—Box cord is a very simple form of cordage, the method of manufacture being quite different from that of the foregoing laid cords. In the box-cord process there are two distinct groups of twisting operations conducted simultaneously. The single threads, of which there may be from two to eight, receive the necessary additional twist by a corresponding number of flyers which differ in shape, however, from the ones in roving and ordinary spinning in that they are known, as enclosed flyers. While these individual threads are being twisted, the several yarns converge towards, and pass direct to, the eye of another enclosed flyer which completes the process by twisting the component threads

in the opposite direction to that imparted to the single threads by the two to eight different flyers. It should be mentioned that the building of the completed box-cord on the bobbin is accomplished by suitable mechanism attached to the flyer.

The machine is comparatively simple, and the attendants need little experience beyond that of detecting broken threads and repairing them. It need hardly . be pointed out that the omission of a thread from the requisite number in the group for the finished cord is a fault the prevention of which constitutes one of the chief duties of the attendant. The finished product is termed two-ply, three-ply, . . . eight-ply box-cord according to the number of single yarns which are utilized. Practically all clasess of fibre are used in the manufacture of these goods, and this method of twisting is largely adopted for the making up of comparatively light cords from fairly heavy sizes of yarn. The product is used extensively for tying boxes and large packages and thus serves the purpose of a light rope which is a more expensive article.

PLAITING OR BRAIDING.—Special classes of lines and cords are now made on a machine of an ingenious design. One of the advantages of this machine is the fact that great lengths of line can be made; indeed, there is practically no limit to the length which may be made beyond that of the difficulty of handling the huge size of the finished product.

The machine, which is complicated and costly in its upkeep, is used extensively for the production of log lines, sash cords, and a large variety of blind cords. The requisite number of threads for the cord are wound on a suitable number of bobbins, and the latter are placed in carriers in the machine. The varies of the passed over or across each other in such a suitable number of the passed over or across each other in such a such a

that they are locked in position and in the well-known plaited form which is characteristic of this class of goods. This scheme of interlocking is formed by an even number of groups of threads, usually eight or more, and the movements of these groups, or rather the bobbins which centain them, are practically identical with the familiar "grand-chain" in circle dances practised by children and also by grown-up persons. Alternate bobbins move sinuously round a circle in one direction, while the remaining alternate bobbins move similarly in the opposite direction. Each bobbin passes those in the other group first on the left and then on the right of a circle whose path is the centre of the two sinuous paths described by the two sets of bobbins.

The continuous movements of the two sets of bobbins in each machine form the elegant cord which, when plaited, passes through a guide eye in the centre of the circle but in a higher plane. From this eye the cord rises to a pair of hauling-winch pulleys around which it passes a few times forming the figure 8. Finally, the cord passes between a pair of delivery rollers into a large box at the back of the machine. The hauling-winch pulleys and the drawing rollers, which combined give the necessary firmness, are driven positively and accurately so that their surface speeds may coincide with the amount of cord which is formed at the guide eve.

CHAPTER X

ROPES AND ROPE MAKING; YARN NUMBERING

A CONSIDERABLE quantity of the smaller-sized ropes are now made on what are termed "house machines" These machines perform the same function as those in the rope-walk but they occupy a much smaller space: they are adapted to deal with a great range of sizes although, in general, it is not necessary to use one machine for a large range of work; there is such a variety of ropes in use that in a well-equipped rope works it is possible to keep each machine almost constantly on ropes within a small range of size. These remarks refer, as indicated, to ropes which come within the limit of, say 2 to 3 in, in circumference. In the manufacture of the larger sizes of ropes, it is usual to use two distinct machines, one termed the "strander." and the other the "closer," and, although the housemachine made ropes are often considered inferior to those made in the rope-walk, many of the objections urged against the untarred ropes made in the housemachine are more imaginary than real.

Fig. 29 is illustrative of a number of machines of a type used for the making of ropes in which twelve to forty-five threads may be combined in one operation during the manufacture of a three-strand or a four-strand rope. The bobbins are placed in creel flyers of which there may be three or four according as the rope is to be a three-strand or a four-strandone. The creel flyers are composed of two parts, one of which carries the bobbins, and the other carries the hading and wisting gear. All the three or the four strands are made at the same time; when formed they have their

respective flyers and converge towards the top and the die or central tube where they are formed into a rope by the proper degree of wist according to the purpose for which the rope is to be used. Finally, the finished



By permission of the

Fig. 29

Edinburgh Ropery Co.

ROPE-MAKING (HOUSE MACHINES)

rope is drawn forward by a series of hauling pulleys which also conduct the rope to the winding-on reelect bobbin, and by suitable mechanism the rope is wound into a temperary form of coil. As the bobbins are filled with rope they are removed from the machine and conveyed to special coiling machines where they are measured when necessary as they are made up into coils suitable for the particular purposes desired. A common length of coil is 120 fathoms.

Although the various house machines represent the latest developments in the art of stranding and closing

—the two essential operations of rope making—a modern rope and cordage works is provided not only with the various machines which have been illustrated and described, but also with a well-equipped rope-walk so that the products may include a great variety of cordage from the finest lines to the mammoth ropes for ships, steamers, harbours and heavy hauling purposes generally.

The combination of the house machines and the modern rope-walk makes present arrangements very complete when compared with the old type of rope-walk, but the apparatus employed in these old rope-walk machines embodies all the principles of construction which are present in the new machines for the same class of work

Rope-walks are, naturally, long, narrow buildings because the full length of the rope is in one stretch.

The work which is conducted in such places and the type of building is admirably portrayed in the first three verses of Longfellow's poem—

THE ROPE-WALK.

In that building long and low, With its windows all a row, Like the port-holes of a hulk, Human spiders spin and spin, Backward down their threads so thin, Dropping, each, a hempen hulk.

At the end an open door; Squares of sunshine on the floor Light the long and dusky lane; And the whirling of the wheel, Dull and drows, makes me feel All its spokes are in my brain.

As the spinners to the and Downward go and re-ascend, Gleam the long threads in the sun; a While within this brain of mine Cobwebs brightet and more sine By the busy wheel are span, At the top of the rope-walk is a stand or bank which contains the bobbins of yarn, and this yarn may be dry or tarred according to requirements. The bobbins are arranged on pins and the necessary number of yarns for each strand are drawn from the bobbins and passed, in their proper order for ensuring a uniform strand, through a number of holes in a "register plate" immediately behind the machine. In a modern machine any number of strands up to six can be formed at the same time, and hence there will be six register plates for the yarns. For the larger-sized ropes only one strand can be drawn out in one operation.

A machine termed a "traveller," is employed to draw out the strands, and this machine is provided with a series of hooks as well as a central spindle. The strands may be attached as required either to the hooks or to the spindle. A rope-driving gear causes this traveller to move on rails down the walk and for the distance required, and it will be evident that as the traveller recedes from the bank it will draw the groups of threads from the bobbins and through the register plates; at the same time the several hooks are caused to rotate, and thus each strand is twisted and hauled simultaneously.

When the traveller has moved backwards or downwards for the necessary distance to form the length of strand, the strands are removed from the hooks and attached to suitable supports until a sufficient number has been made for closing or laying-up.


To form the strands into a rope, it is essential to use a fixed or stationary machine along with the traveller and a top cart. The stationary machine is substantially built, and sites alia, is provided with a sentral spindle around which are grouped a set of hooks—usually in sections.

Two wheels on the central spindle

drive a number of pinions, one behind the ratio of one wheel to half the pinions is 34 to 16, and the ratio of the other wheel to the other half to pinions is 54 to 11. Thus, the revolutions may be a 1 to 1 when the strand is on the central spindle 34 to 16 or approx. 2 to 1 when on large hooks, and 54 to 11 ,, , 5 to 1 when on small hooks.

When the necessary strands to form the rope are stretched between the stationary machine and the traveller, an extra amount of twist is imparted to each strand, an operation which is termed "hardening the strand"; the amount of twist can be judged only by past experience, although it is common to give institictions in the words "harden so many fathoms" at other times the strands are hardened until the threads form a desired angle. In all cases the strands should be twisted equally so that the same tensile stress is on each strand. After this twist has been applied, all the strands are placed either on one of the hooks or on the central spindle of the traveller. A top-shaped block is put into position inside the three strands—this top is in full view in Fig. 30, which, by the way, illustrates the laying of a 28-in. circumference four-strand hawser with a central core-and the machines started for a few revolutions. When the first make of the rope is formed, the top is brought back to its proper place, a iew pieces of rope, termed tails, are placed round the newly-formed portion of the rope, and these may be collected and held in position by a bar as shown of these tails was removed when the photograph taken in order to show the finished part of the rome between the top-cart and the fraveller. The travell is now braked to keep the rope taut while the and maker lays the strands, the hooks of the state wachine at the top of the walk as well as the benefit as the toxically bring rotated meanwhile at a speed which is extracte for the make or lay of the rope. The hooks in the two machines rotate relatively about 7 to 9 or 7 to 11.

When a hawser or cable-laid rope or a "trawl warp" is desired, the formed ropes are again placed in position.



LAYING OF A FOUR-STRAND CABLE-LAID ROPE IN.
THE ROPE-WALK

and the whole routine repeated, while if the warp is to consist of more than three strands, a heart must be inserted, as exemplified in Fig. 30, upon which to lay build the strands. It will be understood that the constative is looking towards the top of the walk the stationary machine is situated.

After the laying is completed, the finished rope must be made into a coil ready for transportation. The

106 a CORDAGE AND CORDAGE REMP AND PIERES

house machine or the rope-walk, and for the coiling of such ropes as that illustrated in Fig. 30, it is obvious that the machine must be of substantial build. When such a large rope is complete and ready for despatch, it resembles the 18-in. circumference mooring rope in Fig. 31; this rope was 90 fathoms long and two tons




Fig. 31

VIEWS OF LARGE AND MEDIUM-SIZED COILS OF ROPE

 weight, and was coiled in about ten minutes by a machine specially designed for the purpose.

Rope driving has practically revolutionized the construction of modern mills since ropes are used not only as a direct drive from the rope pulley on the engine or motor shaft, but at many intermediatesplaces, and have replaced many installations of wheel-gearing. These mill-driving ropes, which are invariably from 11 to 2 in. in diameter, are made extensively of cotten, hemp or

manila. In exceptional cases more than forty such ropes are used on the same pulley. The frontispiece illustrates a rope drive in which seven ropes each of 1\(\gamma\) in diameter, are utilized on the shafts of a motor for conveying the motion to a mill shaft seen in the distance. Other ropes are seen in the next rope alley. Somewhat similar ropes, but of a smaller diameter, are used for hauling in the baling press illustrated in Fig. 15.

There are several methods of numbering yarns, most of which involve a direct relation between the weight and length. Thus, to quote six of the most widely-practised

methods in the textile industry we have

Hemp is sometimes reckoned according to the linen system and sometimes by the jute system.

An entirely different method of counting or numbering obtains in regard to ropes. The system of yarn numbering for ropes depends upon the number of single yarns or threads required to make one strand of a 3 incircumference rope. Thus, if 25 yarns are required to form such a strand, the yarn is 25's, while if 30 yarns were required for the same thickness of strand, the yarn would be 30's, and so on. The tube through which the yarns are drawn is nearly half an inch bore,

If the yarn number is multiplied by 5, the product represents the number of yards of yarn in 1 lb. Thus, in the above 25's yarn there are

25's × 5 = 125 yd., or 375 ft. per lb.

Ropes are usually designated by their circumferences in inches, and also by the number of strands neglecting the heart is such is required.

CHAPTER XI

MARKETING

It is essential in modern times that goods which are placed on the market should be as attractive as it is possible to make them, and cordage forms no exception to this rule. The acme of attraction may be said to have been reached when a sale is effected more from appearance than from any immediate want, and this is the ideal to be aimed at. No detail which will make the goods attractive or memorable should be omitted. Carelessly made-up goods are quickly noticed, and however high may be the quality of the article, an indifferent make-up creates an unfavourable impression which is difficult to remove.

Little things, insignificant in themselves, often form the nucleus of great undertakings. Mnemonic titles, trade names, distinctive labels and the like are all adopted to safeguard the interests of the maker, to guarantee his products, to spread his fame, and to keep his goods constantly in the mind's eye of the purchaser.

Whilst no great effort is necessary to parcel up small articles in an attractive form, it seems hardly possible to deal with bulky articles with the same degree of success. Nevertheless, several of these heavy and unhandy articles are elegantly made up as is emphasized by the coils in Fig. 31. This is the usual way of making up ropes, and the size of the coil depends partly upon the length of the rope, partly upon the use to which is is to be put, and partly upon the thickness. If the longer are to be cut up into definite lengths, the

will be a multiple of that length; if otherwise, a common length of rope is 120 fathoms as already stated.

The smaller coils, and the better grades of larger coils, are often enclosed in paper, while the larger ones are covered with wrappers of suitable texture to ensure the arrival, of the ropes in good condition at their destination. The coils themselves are securely bound as exemplified in Fig. 31 to prevent the displacement of the structure during transit or handling, and, in addition, many of these large and valuable ropes are entirely covered by a cheap rope binding.

A large quantity of ropes, cords and twines are made into hanks or "rands," as they are termed, on a special machine. For short lengths this method of making up is very compact, very neat and very convenient for marketing.

Binder twine is first made up into standard size balls which must fit the boxes on the reaping and binding machines; afterwards they are packed in bales ready for despatch.

Other varieties of twine are made up in the same shape of balls as above, but the sizes of the balls depend upon many circumstances. Large quantities for the retail trade are made up into convenient sizes to suit the twine boxes, and again many are made to a specified weight.

It will thus be seen that a series of balling machines will be required to deal with the making up of the twine in this form. These machines make weat and attractive-looking balls, the weight of which may vary from 2 oz. to 28 lb. each.

The mechanism by means of which the yarn is built into balls is at once elegant and ingenious, and the mide-up ball is quite satisfactory if when commencing the use the twine, the end is withdrawn from the right

110 CORDAGE AND CORDAGE HEMP AND PIBRES

end. A ticket with the words "pull out this end" is often attached as a guide. If the twine is drawn from the wrong end of a ball, the continual difficulty experienced in withdrawing the twine will be always remembered; on the other hand, if the twine is drawn out at the proper end, the correct running of the twine will enable the attendant to complete his parcel tying with the minimum of trouble and time, and enable him to give attention to other work in hand.

This inconvenience is obviated by a comparatively recent introduction in winding which makes an elegant cylindrical structure termed a roll. This popular and efficient mechanism is the Universal Winding Machine, the various makes of which enable rolls of from 2 oz. to 72 lb. to be made perfectly. The rolls are so attractive, compact, economical and easily handled that one would not be surprised to see a much more extended application of this useful form of package.

For shops and similar places, the smaller balls and

For shops and similar places, the smaller balls and rolls are made up in paper parcels of about 12 lb. each. The larger balls and rolls may be made up separately or in convenient numbers. Sewing threads and yarns may be made up in small balls, but a more common and neater arrangement is to make them up on reels or in rolls. Neatness, facility for use, and suitability for intended purposes are the main points to be cultivated in order to secure and retain business.



INDEX

LEAVE Americana, 8	Cords, 5, 50, 67, 93, 97
, section, 9	Cotton driving ropes, 55
	fibres, cross-sectional
, Photomicrograph of	view of, 15
Mexican, 11	· · · · · · · · · · longitudinal view
sisalana, 35	of, 14
, cultivation of, 36,	Cutting machine, 60, 61
, harvesting of, 38	DECORDE ATOR, 38, 40
height of leaves of	Demi-sec spinning, 85
36	Differential motion, 82, 86
, weeding of, 36	Doffing, 83
Automatic spinning frame, 78,	Doubling frame, 77
89, 91	Drafting, 69, 70, 72, 77, 80,
thread stop motion, 94	83 85 90
tinead stop motion, a	Drawing frame, 73, 76, 77, 79
Baling, 53, 54	Dry spinning frame, 83
press, 43, 44, 107	Drying bleached yarns, 95
Balling machine, 109	
Bast layers, 24, 25, 29	FALLERS, 71, 87
length of, 26	Rebro grading of Manila, 33, 34
	ol New Zealand, 47
Batch, 87 Binder twine, 109	harvesting of hemp, 22
	Imports of hemp, 20
Blend, 87 Bobbin-to-bobbin polishing	. of Manua, 55
machine, 96	- price of different kinds
Day cords 50 97 98	of 54
Box cords, 50, 97, 98 Braiding, 98	of Manila, 34, 51
Breaker cards, 74	production of hemp, 20
Breaking, 15, 24, 25, 27	weld of hemp, 22
machines, 59, 60	of Manda, 33
machines, ov,	Ol New Zealand, 47
CABLE-LAID, 97	Fibres, biblical reference to, 3
Card, 73, 74	, characterities of, 2
Carding machine, 73, 74	classification of, 10
China jute, 50	classification of 16 hard and soft, 17, 18, 89
Closer, 100	CIEWS OF COLLOR, 14, 10
Closing, 103	separation and extrac-
Coiling machine, 101, 105, 106	tion of, 2, 5, 6, 26
Coils of repe, 195, 106.	,, shipments of, 52
Coir, 47, 96	nources of, 5, 13, 15

Fishing lines, 97° Plax, 13, 16, 18, 24, 29, 45, 83	Marks or grades, 87 Mauritius fibre, 47 New Zealand fibre, yield of, 47
GILL spinning frame, 79, 85 Gills, 71, 78, 90	vesting of, 46 plants, har
Hackler pins, 79, 87 Hackler and spreader, 87, 88 Hackling machine, 62	of, 45 Numbering yarns, 107
apparatus for, 64 tools, 65	Plaiting, 98 Plants, cultivation of Manila, 31
65 grouping of pins in,	, height of Manila, 32
Hand dressing, 66 Hardening the strand, 104 Hemp plants, 12	RANDS, 109 Raspadore, 38 Reach, 76, 78
cultivation of, 13	Retting, 18, 23, 24, 25 Rope driving, 106
countries, 16, 19, 20	
, Siretz, 29	105 Ropes, 5, 15, 100, 102, 104, 107
House machines, 100, 101	Roughing, 67 Rove, 68, 80, 82
INTERMEDIATE machine, 89	Roving frame, 79, 80
ЈUТВФ 13, 18, 44, 76, 83, 107 , China, 50	Scutcher, 38 Scutching, 15, 24, 25, 27, 28, 29, 33
LAYING-UP, 103, 105 Line, 68	Seeds, 15, 21, 22, 32 Sett frame, 77
Lines, 93 —, fishing, 97	Sewing twines, 67 Shive, 28
Log lines, 98	Sisal, 7, 35, 44
Manua, 31, 44 and other fibres, 87	breaker, 38, 39 grading of, 44, 48 Sliver 68, 69, 72, 73, 75, 77, 78, 79, 80, 82, 85, 89
machine for, 87 mpchine for, 87 mpchine for, 87 mpchine for, 87	Softening, 36, 57 Sorting and selecting, 68
Marketing, 108	Spread board, 69, 70, 72, 77,

Spindle winding machine, 92 Spinning, 5, 55, 79, 83, 85 Stationary machine for ropes, 104 Strander, 100 Strands, 5, 100, 103, 105 Strick, 28, 55, 78 Suffin hemp 49 Systems of machinery 56, 68

TAR, 90
Top cart, 103
——-shaped block, 104
Tow, 49, 73, 74
Traveller, 103

Twines, 5, 93 • Twist and twisting, 48, 82, 93, 94, 96, 97, 98

Warping, 90
Washing tanks, 40, 41
Wet spunning, 85
Whip cords, 97
Winding-on reel, 101
Windung machine, 110
Window blind cords, 97
Winding reel, 90
Wool, 5, 16

YARN numbering, 107



THE END

- AN ABRIDGED LIST OF THE

(LONDON: 1 AMEN CORNER, E.C.4

BATH: Phonetic Institute, MELBOURNE: The Rialio, Colling St.

NEW YORK: 2 West 45th St.

The Prices contained in this Catalogue :: apply only to the British Isles :: TERMS-

TERMINCRAIN HUST be sent with the order, AND MAY INCLUDE AN APPROXIMATE AMOUNT FOR THE
PROSTACE. When a remultance is us excess of the sum requered, the surplus will be returned.
Sums under 6d, can be sent is stamps. For sums of the and upwards Protti Orders or Money
Orders are preferred to stamps, and should be crossed and made pavable to
Six ISAAC PITHAN & SONS, LTD.
Remittances from abroad should be by means of International Money trates in Foreign
Countries, and by British Postal Orders within the British Oversea Dominions. Colonal
Postal Orders are not negotiable in England. Foreign stamps cannot a accurrent.

ARITHMETIC	
FIRST STEPS IN COMMERCIAL ARITHMETIC. By ARTHUR E. WILLIAMS, M.A.,	
B.Sc. In crown 8vo, lump cloth, 80 pp	v
B.Sc. In crown 8vo, hmp cloth, 80 pp. THE ELEMENTS OF COMMERCIAL ARITHMETIC. By THOMAS BROWN. In	
crown 8vo, cloth, 140 pp	2/-
BUSINESS ARITHMETIC. Part L. In crown 8vo, cloth, 120 pp. 13. Answers	IJ-
	IJ-
COMPLETE COMMERCIAL ARITHMETIC. Contains Parts I and II above mentioned.	
in crown 8vo, cloth, 264 pp.	V
In crown 8vo, cloth, 264 pp. 34. Answers SHALLER COMMERCIAL ARTHMETIC. By C. W. CROOK, B.A., B.Sc. In crown 8vo, cloth TEST STEPS IN WORKSHOP ARITHMETIC. By H. P. Guilm. In crown 8vo,	
Crown Svo, cloth	u
TREST STEPS IN WORKSHOP ARTERISTIC. By H. P. GRILE. In CLOWN BVO, impeloth, shout 80 pt. Ref. OURTLAND MERCHANTLE ARTERISTIC. With Liementary Mensuration. By H. P. GREEN, H.C.S.P.T. In crown 800, cloth git, with Key, 640 pp 364	
nimp cloth, about 80 pp.	V
With Liementary Mensuration, By	L.
Fi. P. GREEN, F.C.Sp.T. In crown 8vo, cloth git, with Key, 046 pp	W
Complete book without Key, 600 pp , 4/8 net. Key separately, 1/3 net. Also in	
three parts. Part I, 300 pp., 2.8 net. Part II, 208 pp., 1/8 net. Part III, 100 pp.	
1/- net.	
COUNTING HOUSE MATHEMATICS. By H. W. PORRITT and W. NICKLIN, A.S.A.A.	
In crown 8vo, cloth, 220 pp. ARTHURSTIC AND BOOK-KEEPING. By That Brown, F.S.S., and VINCENT E.	ų
COLLEGE A C. C. L. AND BOUK-KEEPING. BY 13134 SROWN, F.S.S., AND VINCENT E.	
COLLINGE, A.C.I.S. In two parts. Part 1, 124 pp. Part 2, 115 pp. Bach in	
FAG ADMINISTRATING THE PROPERTY AND PROPERTY DATE IN THE PROPERTY AND	1/
LOGARTHES FOR BUSINESS PURPASES. By H. W. PORRITT and W. NICELLE, A.S.A.A. In crown 8vo, lunp citch	_
RAPID RETHODS IN ARITHMETIC. By JOHN JOHNSTON. Revised and Edited by	
G. K. Buckwall, A.C.I.S. (Hoas.). New and Solarged Edition. In foolscap.	
evo, cloth, of pp.	
EXERCISES OF CAPID, METHODS IN ARITHMETIC. By JOHN JOHNSTON, In	À
Grown Syo, cloth	٠.
crown 8vo, cloth Ref REFIGURE RAPERING A guide to the teaching of Arithmetic. By G. R. Prints RAPERING RAPER	Ų
THE METERS AND BRITISH SYSTEM OF WEIGHTS, MEASURES, AND COINAGE	v
By DR. F. MOLLWO PERKIN. In 8vo, with numerous illustrations.	•

ARTHMETIC OF ALTERNATING CURRENTS. By E. H. CRAPPER, M.I.E.R. in crown Svd. illustrated activities of Electrical Engineering. For Treinical Students. In the Computation of Electrical Engineering.	V -
rosen Bos., illustrated THE HLDE BULE. ITS OPERATIONS: AND DIGHT RULES. Pocket size Het THE BLDE RULE. A Precical Manual. Illustrated Het	3/6 6d. 3/6
BOOK-KEEPING AND ACCOUNTANCY	
FIRST STEPS IN BOOK-KEEPING. By W. A. HATCHARD, A.C.P., F.B.T. In	
FRINER OF BOOK-KEEPING. Thoroughly prepares the student for the study of	1/3
norre elaborate treatises. In crown 5vo, cloth, 144 pp. 1/6. Answers, Het EASY EXERCISES FOR PRIMILE OF BOOK-KEEPING. In crown 8vo, 48 pp.	1/8 64.
BOOK-KLEPING FOR BLGINNERS. A first course in the art of up-to-date Book-keping With Answers to the Exercises. By W. E. Hooper, A.C.I.S. In	64.
present Russ cluth 14 R tots	1/6
THE ELEMENTS OF BOOK-KEEPING. By W. O. Buxton, A.C.A. (Hons.), In	
BOOK-KEEPING AND COMMERCIAL PRACTICE. By H. H. SMITH, F.C.T.,	2/-
BOOK-KEEPING SIMPLIFIED. Theroughly revised edition. By W. O. BUXTON.	1/9
A CA (Hone) In cr. we Syo, cloth, 304 pp 3/8. Answers, Net	2/- 8/6
BIGHER BOOK-KEEPING AND ACCOUNTS. By H. W. PORRITT and W. NICKLIN,	8/6
A.S.A.A. In crown 8vo, coth, 304 pp., with many up-to-date forms and facsimile documents.	3/6
FULL COURSE DE BOOK-REPPING. By H. W. PORRITT and W. NICKLIN, A.S.A.A. This volume consists of the popular text-book. Higher Book-keeping and Accounts,	0,0
to which has been prefixed a section on elementary Book-keeping. In grown 8vo.	
cloth gilt, \$40 pp. Not COMPLETE BOOK-REEPING. A thoroughly comprehensive text-book, dealing with	4/-
all departments of the subject. In crown, 8vo, cloth, 424 pp. 5/- net. Answers, Net ADVANCED ACCOUNTS. A Practical Manual for the Advanced Student and Feacher,	2/6
Edited by Roger N. Carter, M Com., F.C.A. In demy 8vo, cloth gilt, 988 pp.	
DICTIONARY OF BOOK-KEEPING. A Practical Guide and Book of Reference for	7/6
Teachers, Students and Fractitioners. By R. J. Porters. In demy 8vo, cloth	6/-
	-
DOUG-EXEPTING FOR RETAILERS. By H. W. PORRITT and W. NICKIIN, A.S.A.A. In crows 800, cloth, 124 pp. ADDITIONAL EXERCISES IN SOOK-KEEPING, Nos. I and II. New Editions, in crown 800, 80 pp. BOOK-EXEPTING TEST CARDS. Elem. and Inter. Per Sect. 84	2/-
In crown 840, 50 pp. Each, 8d. net. Answers, each, Net	6d. 1/6
BUSINESS BOOK-KEEPING. By J ROUT BY Incrows 8.0, clath, 360 pp. Not	3/6
In crown Ace, 80 pp. Bach, 8d. net. Answers, each, Net BOOK-EEFFING TEST CARDS. Elem. and Inter. Per Sct. Net BUSINESS BOOK-KEEFING. By J Rome ry Increw 8co, dash, 460 pp. Net EXAMINATION ROTES ON BOOK-KEEFING AND ACCOUNTANCY. By J BLAKE HARROLD, ACLS, F.C. R.A. (both, 64 m. by 34 m. 56 pp. Net BOOKE BOOK-KEEFING. With Billion Lawy forms, and complete. Net	1/-
about me and carriers. In closes bed,	2/6
SALARCING AND RELF-BALANCING LEDGERS Ru C A Mose ACIS In	
BOOL-REPURG AND ACCOUNTANCY PROBLEMS. By G. JOHNSON, F.C.I.S. In crown No. Cottle gill, 112 pp.	64.
COMPLETE WARRISON BOOK BOOK BOOK TOWN	2/6
wrapper, of pin BOUS FOR BOUS-KEEPING. In crown 4to, stiff paper wrapper, of pin BOUS FOR BOUK-KEEPING. Specially ruled and adapted for working the despites contained in the Primer of Broke-keeping. The sets for the bound of Cash Book, Purchase Book; Sales Book and Journal, Ledger. Each AVOI KEERCISE BOOKS FOR BOOK-KEEPING. Severally adamed for the persent	1/6
for working the transfer contained in the Friner of Book-keeping. The sets	
AVOIR EXERCISE BOOKS FOR BOOK-KEEPING. Specially adapted for the exer-	64.
cuses in Book-keeping Simplified or Advanced Book-keeping. Foolscap folio.	
CLES IN Book-keeping Simplified of Advanced Blook-keeping, Fooliscap folio. BEARMATON NOTES ON MUNICIPAL SCOUNTANCY. By W. G. DAYS, ASAA STOCKLED DAYS,	104.
RALANCE SHEETS: HOW TO READOND UNDERSTAND THEM BY PHILLS	1/-
A S.A.A. Street in by 14 in cheth, 46 pp. A S.A.A. Street in by 14 in cheth, 46 pp. BASIC STREETS: HOW TO READCHAID UNDERSTAIND THEM. By PHILIP A S. L. S. In leading Box, cloth, 55 pp., with 36 mset Balance Sheets He BOY TO RECORD A QUALIFIED ACCOUNTAIT. By S. A. WETT, ASAA. Second Edition. 9 in Towns 10, cloth, 120 pp. BASIC STREETS: BY F. W. PIKRY, BC.A., Barrister-at-Law. In demy 8vo, cloth, 14 pp.	2/-
Second Edition, o in crown to , cloth, 120 pp.	2/-
By P. W. Pikin Y, RC.A., Barrister-at-Law. In demy 8vo, cloth,	e/-
BOOK-REFING TRACHERS' MANUAL. By C. H. KIRTON, A.C.I.S., F.Inc.S.T.	¥-:
an demy avol ciota gir, \$30 pp.	4.

AUDITING, ACCOUNTING AND BANKING. By Frank Dowler, A.C.A., and B. Mardinor Harris, A.L.B. in demy 8vo, cloth gilt, 328 pp	W -
8vo, cleth, 120 pp. WANUFACTURING BOOK-KEEPING AND COSTS. By Co JOHNSON, F.C.I.S., in	2/6
demy 8vo, cloth gilt, 120 pp. PRAOTICAL BOOK-KEEPING. By the same Author. In demy 8vo, cloth, 420 pp. Net	3/6
THEPRECIATION AND WASTING ASSETS, and their Treatment in Computing Annual	1010
Profit and Loss. By P. D. LEANE, E.C.A. In dealy St., crith gar, 187 pp. Met. THE PRINCIPLES OF AUDITING. By F. R. M. Di Laula, 1 C.A. In dealy by cloth gall 222 pp.	10/6
COST ACCOUNTS IN PRINCIPLE AND PRACTICE. By A. CLIFFORD RIDGWAY,	5
GOLD MINE ACCOUNTS AND COSTING. A Practical Manual for Officials, Accountants, Book-keepers, Etc. By G. W. Lair. In demy 8vo, cloth gift,	
ONPANY ACCOUNTS. A complete, practical Macual for the use of officials in Limited Companies and advanced students. Do Akiner Cons., E.C.18. In	5/ -
demy 8vo, cloth gilt, 3x6 pp. Second Edition	7/8
WILLIAM B. PHILLIPS, A.C.A. (Hons. Inter. and Linait, A.C.I.S. In dead Sec. Color Bril. 152 PP. RAILWAY ACCOUNTS AND FINANCE. The Railway Companies (Accounts and	₩-
Returns) Act, 1911. By ALIEN L. NEWHOOK, A KC. In deliv 8vo, cle in gut,	5/-
and concise System of Account Keeping, etch, 100 pp. with inter, exact bottom	7/6
THE PERSONAL ACCOUNT BOOK. By the same Author Size, 154 m by of the	7/6
half leather, to6 pp., with interleaved biotting paper THE "EFFICIENT" CHECK FIGURE SYSTEM. 46 H O HORTON In demy 8vo. 22 pp	1/-
BUSINESS TRAINING, COPY BOOKS, ETC.	
COMMERCIAL READER (Junior Book). Our 1 - 1 Supplies. To 1. W. Chambers With over 70 dibstrated serior and the Book. Our Monifecture Industries. In COMMERCIAL READER (Intermediate Book).	
With over 70 illustrations, 220 ill COMMERCIAL READER (Intermediate Book). Our Meinfartune, Industries Increwe Son, et al., 240 ill. 10.13.	۲,-
With over 70 districtions, 220 H COMMERCIAL READER (Intermediate Book). On Montherman Industrial In- COMMERCIAL READER (Intermediate Book). As a trade transit Modern Commerce COMMERCIAL READER (Senior Book). As a trade transit Modern Commerce CONTAINS OVER TWO INDUSTRICTION AND THE ASSETTION AND TH	2;- 2/8
With over 70 offest (thous, 240 th OMMERCIAL READER (Intermediate Book). On Montherman Industrial In- COMMERCIAL READER (Intermediate Book). As a trade transit Modern Commerce COMMERCIAL READER (Senior Book). As a trade transit Modern Commerce COMMERCIAL READER (Senior Book). As a trade transit Modern Commerce COMMERCIAL READER (Senior Book). As a trade transit Modern Commerce COMMERCIAL READER (Senior Book). As a trade transit Modern Commerce COMMERCIAL READER (Senior Book). As a trade transit Modern Commercial COMMERCIAL READER (Senior Book). As a trade t	2/- 2/6
With over 70 districtions, 220 st. With over 70 districtions, 220 st. OMMERCIAL READER (Intermediate Book). Our Montrenum Industries. In Crown 850, ct 0. 20 pt. OMMERCIAL READER (Senior Book). An introduction to Modern Commerce. Outside Sevential Reader (Senior Book). An introduction to Modern Commerce. OUTSIDE ROUTINE FOR BOYS AND GIRLS. In three says. In the commerce of the Person Sevential Reader Seventia	2/- 2/6 8d. 1/8
With over 70 districtions, 220 st. With over 70 districtions, 220 st. With Over 70 districtions, 220 st. OMMERCIAL READER (Remor Book). Our Montrenum Industries. In Crown 850, c. 10, 20 pt. COMMERCIAL READER (Senior Book). As a trackal tion to Modern Commerce. Contains over 100 black and ware ran trackas. In original 850, cloth, 22 pp OPTIOE ROUTINE FOR BOYS AND GIRLS. In three steps, 1 to his cis was Now. 850, in proceedings of the Senior Senio	2/- 2/6 8d. 1/8
With over 70 districtions, 220 st. OMMERCIAL READER (Intermediate Book). On Montherman Industrial Industrial Industrial Reader (Intermediate Book). On Monthermal Industrial In	2/- 2/6 84. 1/1 1/8
With over 70 districtions, 220 H OMMERCIAL READER (Intermediate Book). On Montrollar Industrial Information (Intermediate Book). As a trade tent in Modern Collingration (Intermediate Book). As a trade tent in Modern Collingration (Intermediate Book). As a trade tent in Modern Collingration (Intermediate Book). As a trade tent in Modern Collingration (Intermediate Book). The Collingration (Intermediate Book). OPTIOR ROUTINE FOR BOYS AND GREEN. In three stage Intermediate Book (Intermediate Book). As a stage of the Stage of Plants	2/- 2/6 8d. 1/3 1/8
With over 70 offset (1008, 2404) OMMERCIAL READER (Informedate Book). On Montarina Industrial Informedate Reader (Informedate Book). As a tradition in Modern Connection OMMERCIAL READER (Senior Book). As a tradition in Modern Connection Offset ROUTINE FOR BOYS AND GIVEN as a large of the sound beyond the New New Offset ROUTINE FOR BOYS AND GIVEN. In the sound beyond the New New, Implementation of the Section of the Sectio	2/- 2/6 8d. 1/3 1/3 1/9
With over 70 offset flores, 2014 With over 70 offset flores, 2014 OMMERCIAL READER (thermedate Book). On Mental flores to merce, crown box, c. 0.2 (1) in 1. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2.	2/- 2/6 8d. 1/3 1/8 1/8 1/8
With over 70 offest those, 200 if OMMERCIAL READER (their mediate Book). On Montherman 2 Industrial Industrial Industrial Reader (their mediate Book). On Monthermal Industrial	2/- 2/6 8d. 1/8 1/8 1/8 2/6 8/1
With over 70 offset flores, 2014 With over 70 offset flores, 2014 OMMERCIAL READER (thermediate Book). Our Mentarina Industrial Industrial Reader (thermediate Book). As a tracket for a Medical Countries for Book and the state of the Section 27 pp. OPTIOR ROUTINE FOR BOYS AND GREES. In three stay. In the section 800 pp. OPTIOR ROUTINE FOR BOYS AND GREES. In three stay. In the section 800 pp. East STEPS IN BUSINESS TRAINING. It I Colling ACLIS. In crown 800, 100th, 2014 pp. OUNTING-HOUSE ROUTINE. Let Year's Course. By Visitar I Colling ACLIS. In crown 800, 100th, 2014 pp. OUNTING-HOUSE ROUTINE. Let Year's Course. By Visitar I Colling ACLIS. In crown 800, 100th, 2014 pp. OUNTING-HOUSE ROUTINE. 2014 Year's Course. By Visitar I Colling ACLIS. In crown 800, 100th, 2014 pp. FIRE PRINCIPLES OF BUSINESS. By JAM'S SEPPLENSON, M.A., M.Com., B.S. THE PRINCIPLES OF BUSINESS. By JAM'S SEPPLENSON, M.A., M.Com., B.S. Part 1. In crown 800, 100th, 2014 pp. FAIL DESIRESS TRAINING. Loud united 60 traps and farsuelles. Eight Business of the Sepple 2014 pp. with many illustration M.Com., B.S. and D.PRACTICE OF COMMERCE. FIRE PRINCIPLES AND PRACTICE OF COMMERCE. OUR PROPERTY OF THE SECOND	2/- 2/6 8d. 1/8 1/8 2/6 8/1 8/1 8/1 8/1 8/1
With over 70 offset flores, 2014 With over 70 offset flores, 2014 OMMERCIAL READER (thermediate Book). Our Mentarina Industrial Industrial Reader (thermediate Book). As a tracket for a Medical Countries for Book and the state of the Section 27 pp. OPTIOR ROUTINE FOR BOYS AND GREES. In three stay. In the section 800 pp. OPTIOR ROUTINE FOR BOYS AND GREES. In three stay. In the section 800 pp. East STEPS IN BUSINESS TRAINING. It I Colling ACLIS. In crown 800, 100th, 2014 pp. OUNTING-HOUSE ROUTINE. Let Year's Course. By Visitar I Colling ACLIS. In crown 800, 100th, 2014 pp. OUNTING-HOUSE ROUTINE. Let Year's Course. By Visitar I Colling ACLIS. In crown 800, 100th, 2014 pp. OUNTING-HOUSE ROUTINE. 2014 Year's Course. By Visitar I Colling ACLIS. In crown 800, 100th, 2014 pp. FIRE PRINCIPLES OF BUSINESS. By JAM'S SEPPLENSON, M.A., M.Com., B.S. THE PRINCIPLES OF BUSINESS. By JAM'S SEPPLENSON, M.A., M.Com., B.S. Part 1. In crown 800, 100th, 2014 pp. FAIL DESIRESS TRAINING. Loud united 60 traps and farsuelles. Eight Business of the Sepple 2014 pp. with many illustration M.Com., B.S. and D.PRACTICE OF COMMERCE. FIRE PRINCIPLES AND PRACTICE OF COMMERCE. OUR PROPERTY OF THE SECOND	2/- 2/6 8d. 1/8 1/8 2/6 8/1 8/1 8/1 8/1 8/1
With over 70 offset flores, 2014 OMMERCIAL READER (hatermedials Book). On Montherman Industrial Industrial Reader (hatermedials Book). As a trade team of Modern Countercown bean and the 12 of	2/
With over 70 offest those, 220 to OMMERCIAL READER (the termedule Book). On Monthermore Industrial Industrial Reader (the termedule Book). As a tradition to Modern Connection of Contains over 700 black and with a fair trades. In termedule Book and the Contains over 700 black and with a fair trades. In termedule Book and Reader Contains over 700 black and with a fair trades. In termedule Book and Reader Contains over 700 black and with a fair trades. In termedule Book and Reader South Industrial ACLIS. In crown Book could with a fair trade and the state of the fair trades of the South Industrial Contained ACLIS. In crown Book could with a fair trade and the state of the South Industrial Contained ACLIS. In crown Book could, with a fair to Vive 1xx 1. Continued ACLIS. In crown Book could, with a fair to the South Industrial Contained Book and the Industrial Contained ACLIS. In crown Book could, with a fair to Vive 1xx 1. Continued ACLIS. In crown Book could, with a fair to the South Industrial Contained Containe	2/- 2/8 8d. 1/3 1/3 1/3 1/3 1/3 1/3 1/3 1/3 1/3 1/3

COMME BUSINESS AND ITS METHODS. By W. CAMPBELL, Chartered Secretary In two work. Eigh \$/6 Net. C implete.

ANSWERS TO QUESTIONS IN BUSINESS TRAINING. By the Ame Author. In crown the, cloth, about 160 pp.

A COURSE IN SUSINGES TRAINING. By G. K. BUCKNALL, A.C.I.S. In crown 8vo, 192 pp SACRIMITE COMMERCIAL FORMS. New, Revised, and Enlarged Edition. Thirty ave separate forms in envelop-POTES PAPARTE REAL PROPERTY OF THE PAPARTE PORTES TO THE PAPARTE BOOK OF FACRIBILE COMPRECIAL PORMS. In large post 450, 32 pp. FACRIBILE COMPANY FORMS. Intry-lour separate forms in envelope flat with the paparter port of the paparter port o Forms sparately, per dog.

REW ERA " BUSINESS COPY BOOKS. By F. HIELIS, F.C.L.S. Civil Service Style, In three books, Junear, Int. mediate, and Senior. Each in stout paper Style. In three DOOKS, Junes, M. COURT, Rage post 400, 31 pp.

BURNESS TRAINING EXECUSE BOOK. Part 1. By Jam's E. Sladen, M.A. (Oron), F.I.S.A. In large post 410, 54 pp.

Mot TRAINING TEXTERS AND EXECUSES. In envelope.

GENERAL ROUTING COFF BOOKS, Ros. 1, 2, and 3. Fee bun large post 410, 24 pp.

CONDITIONAL HAMDWRITING AND CORRESPONDENCE. In foolscap 410, 100 pp.

Mot Training Texture and Texture a quarter cloth, 80 pp.

BURNESS HARDWRITING. Seventh Edition, Revied. In crown 8vo, cloth BOW TO WRITE A GOOD MAND. By B. T. B. Hollings. In crown Svo, oblong, RANDSOOK FOR COMMERCIAL TEACHERS. By FRED HALL, M.A., B.Com RAIDBOOK FOR CUMBERCIAL TRACHERS. BY FRED HALL, M.A., B.Com., F.C.LS., s. tc. In crown 8wa, to-the git, zoo pp.

TRE BUBLIESS GIRL'S HAMDBOOK. By C. CHISHOLM, M.A., and D. W. WALTON.
FORWARD OF SERBIASS. By the same Authors. F twend by Lent.Gen. Sir R. S. S. BADEN-POWELL In Crown 8wa, tolds. 170 pp.

BUSINESS RETTOOS AND SECRETARIAL WORK FOR GIRLS AND WOMEN.
BY HELDER REYMAN, M.A., IN CROWN 2004, Girls. Pp.

TRE JUBIOR WOMAN SECRETARY. BY ANMIF E. DAVIS, F.Inc.S.T. In

CROWN 8wa, right, tools, with dilustrations. 9/-1/6 COUNTS OF, COLD, TOO DE, WITH GUISTATIONS. BY EDWARD A. COPE. In COUNTS BY CHICKES: THEER RIGHTS AND OBLIGATIONS. BY EDWARD A. COPE. In COOLEAN BW. CHICK, TOO DE BY CHICKES. CUSTOMS AND PRACTICE ON THE CONTINENT. BY EMIL DAVIES. In COUNTS BY CHICK, BY CHICKES, BY EMIL DAVIES. IN COUNTS BY CHICK, BY CHICKES, BY EMIL DAVIES. IN COUNTS BY CHICKES. 1/3 1/6 2/6 THE JUNIOR CORPORATION CLERK, By I B (ARRINGTON, E.S.A.A. In grown 800, cloth gilt, with illustrations, 146 pp.

139-141. Guide To Journalism. By A Kingston 4th Edition, In crown 1/8 1/8 PRACTICAL JOURNALISM AND NEWSPAPER LAW. Bv A BAKER, M.J., and B. A. Core. In crown Svo, cloth, 180 pp. 1/8 2/6

64

CIVIL SERVICE

CIVIL SERVICE GUIDE. By A J LAWFORD JONES. In crows Syo, cloth, 129 pp. Het DESERTE CENTURES INTO SUMMARIES. By A. J LAWFORD JONES, of H.M. COPTING MARING THE CONTROL OF T 1/6 2/-2/-(RVIL MERVICE AND COMMERCIAL LONG AND CROSS TOTS. Two Series, each M in cown 8vo, 48 pp. Het CIVIL BERVICE ARTHURETIC TESTS. By P. JoVARLEY TIPTON. In crown 8vo, 4 cloth, to a pp.

CIVIL SERVICE PASSAY WRITING. By W.J. Apple, M.A. In crown 8vo, happen and the service passay writing. _1/3 COS. A. TO THE INCISEAU WRITING. BAY P. Pracocar Incrown 8v3, 64 pp. Paper CIVIL SERVING PRACTICE IN PRESS WESTING. Edited by ARTRUR REYNOLDS, M.A. "Ogon.). In crown 500, cloth, 240 pp.

M.A. "Ogon.). In crown 2/6 ciotà, 8c pp. 1/2

GUIDE TO INDEXING AND PRECIS WRITING. By W. J. Weston, M.A., B.Sc. (Lond.), and E. Rigerer. In crown 840, doth, 110 pts. 9. Bed. INDEXING AND PRECIS WRITING. By A. J. Lawping Jones. In crown 840, cloth, 144 pp.	1/6
cloth, 144 pp. TERROR AND ANGUERO TO THE PROPERTY AND ANGUERO TO THE STREET ANGUERO TO THE PROPERTY AND ANGUERO TO THE PROPERTY ANGUERO TO THE PROPERTY AND ANGUERO TO THE PROPERTY ANGUERO TO THE PROPERTY AND ANGUERO TO THE PROPERTY AND ANGUERO TO THE PROPERTY ANGUERO THE PROPERTY ANGUERO THE PROPERTY ANGUERO TO THE PROPERTY ANGUERO THE PROPERTY	2/-
cicth, 144 pp. Sec. 1 N. S. C.	1/8
•	
ENGLISH AND COMMERCIAL CORRESPONDEN	CE
FIRST STEPS IN COMMERCIAL ENGLISH. By W. J. Weston, M. A., R.Sc. (Lond.). In crown 8vo, https://doi.org/10.1006/j.jpp	1/8
FIRST STEPS IN BUSINESS LETTER WRITING. By Fard Hall, M.A., B.Com., F.C.L.S., etc. In crown 8c., hump cloth, So pp.	1/8
By W. J. WESTON, M.A., B.Sc. (Lond.). In crown 800, cloth, 146 pp., with many	
FARUAL OF COMMERCIAL ENGLISH. By WALTER SHAWCROSS, B.A. Including	1/6
Composition and Prées Writing In crown 8vc, cloth gift, 24 pp. Met BOW TO TEACH COMMERCIAL ENGLISH. By WALTER SHAWLROSS, B.A. in crown 8vc, cloth gift, 100 pp. Met	2/6
COMMERCIAL CORRESPONDENCE AND COMMERCIAL FRIGITISM. In crown No.	2/6 2/5
cloth, 272 pp. EMGLES MERCANTILE CORRESPONDENCE. In crown 800, cloth rut, 200 pp. FIRST STEPS IN BUSINESS COMPOSITION. Lated by K. W. Holland, M.A.,	V-
M.Sc., LL.D. In crown 8v., imp ct ti, 8o pp. ENGLISH COMPOSITION AND CORRESPONDENCE. By J F. Davis, D.Liu, M.A.,	1/8
LL.B. (Lond) In crown Strict ti, 118 pp. A GUIDE TO ENGLISH COMPOSITION. By the Rev. J. H. BACON. 112 pp. cloth	16
ENGLISH GRAMMAR. Now Edition, Revised and Linkaged by C. D. Penchand,	1/6
B.A. (Lond.). In crown 8vo, cloth, 142 pp. ENGLISH GRAMMAR AND COMPOSITION. By W. J. WENTON, M.A., B.Sc.	2/-
(Lond.). In crown 8vo, cloth, 320 pp	11
cloth, 80 pp	1/8 2/6
STRING PUNCTUATION AS A MEANS OF EXPRESSION. By A. E. LOVELL, M.A. In	94.
crown 8vo, cloth, 8o pp.	¥-
STUDIES IN FLOCUTION. By L. M. CARDOLLO (Mrs. Mark Robinson). With over	
POCKET DICTIONARY. Royal 32mo, 5 in, by 3 in , cloth gilt, 370 pp. 364	1/8
COMMERCIAL DICTIONARY. In footscap 800, paper boards, 192 pp	1/-
phonous Words and chapters on Compound Hyphenated Words, etc. By B. S. BARRETT. In crown 8vo, cloth, 203 pp.	2 /-
•	
COMMERCIAL GEOGRAPHY	
FIRST ETEPS IN COMMERCIAL GEOGRAPHY. By Jan Stephenson, M.A., B.Com. There are 10 maps and diagrams included. In Ecowit Svo, lump cloth,	
B.Com. There are 16 maps and diagrams included. Indrown 5vo, imp cloth, 80 pp.	1/8
THE WORLD AND ITS COMMERCIAL GEOGRAPHY. By C. II. GHANT, M.Sc.,	1/8
DELO AND ITS COMMERCES I crown Sw., cloth, 128 pp., with 34 mag. THE DELO AND ITS COMMERCES I crown Sw., cloth, 128 pp., with 34 mag. THE RECEIPTS OF COMMERCES IN GEOGRAPHY. By C. II. GRAFT, M.S.C., F. R. REC. Sc. In crown Sw., cloth, 140 pp. THE ENTIRE INTER In crown Sw., cloth, 140 pp. THE ENTIRE INTER IN COUNTY SW., cloth, 150 pp., with 34 coloured maps and plates, three black and whites Inched United Story COMMERCES IN COUNTY SW. THE ENTIRE ENTIRE ABROAD AND	2/-
150 pp., with 34 coloured maps and plates, inresponded and whitest	2/-
months compressed in crown Sec. Noth, and pp., with associated many	9 4-
COMMERCIAL RECORDING OF THE WORLD. In crown 840, cloth, 350 per with	9/6
, about 90 maps and plates	44

(

REAMINATION HOTES ON COMMERCIAL GEOGRAPHY. By W. P. RUTTER, M. Com. Steady in levy to m., cloth, tao pp. COMMERCIAL ATLAS OF THE WORLD. In crown 410, cloth, 128 pp., 58 maps, and pp. and pp	1
ECONOMIC GEOGRAPHY. (See "Economics" below.)	2,
COMMERCIAL HISTORY	
THE MEMBERS OF COMMERCIAL DISPOSE IN LABOR 11.	
COMPRECIAL HISTORY, By J R. V. MARCHANT, M.A. In crown 8vo, cloth	2/
ECONOMIC HISTORY. (See "L.COYOMICS" below)	8/
, , , , , , , , , , , , , , , , , , ,	-
ECONOMICS	•
THE PLEMENTS OF POLITICAL ECONOMY. By H. HALL, B.A. In crown 8vo.	
GUIDE TO POLITICAL FOONOWY BUY II SAME IN SAME	2/-
OUTTINES OF THE ECONOMIC WISTONS OF THE ASS.	3/(
and no	6/-
ECONOMIC GEOGRAPHY. By JOHN McFarlan, M.A., M.Com. In demy 800, (both gilt, 508 pp. 18 illustrations THE HISTORY AND ECONOMICS OF TRANSPORT. By A. W. Kirkaldy, M.A., B.Latt. (Oxford), M.Com. (Burn), and A. Dunney, h. W. Kirkaldy, M.A.,	8/1
B.Lat. (Oxford), M.Com. (Birm.), and A. Dudley Evans. In demy 8vo,	0.4
DICTIONARY OF ECONOMIC AND PARTING STORES Not	7/6
B.St. and A. Chew Barnsterat-law In Crown Sv., Cith galt, 150 pp. ECONOMICS FOR BUSINESS MEN. By W. J. WESTON, M.A., B.Sc. (Lond.). In	2/6
THE ECONOMICS OF TELEGRAPHIC AND CONTRACTOR M.A., B.Sc. (Lond.) In	2/-
In crown byo. cloth and the same TELEPHONES. By JOHN LEE, M.A.	2/6
Cream Syre St. Dr. Government. By John J. Clarke, M.A., F.S.S. In	
90 pp.	1/~
BANKING AND FINANCE	1/-
THE ELEMENTS OF BANKING BULL COMME	
THE MAMERIES OF BANKING. 14-1 P. GANDY. Incrown 800, doth, 140 pp. Not BANK OSCIALIZATION, MANAGEMENT, AND ACCOUNTS. By J. F. DAVIS, M.A., D.Liu, J.I. B. (Lord.). In d. 179 See, cloth call to the con-	2/-
D.Liu, H.B. (Lond). Ind the second polynes. By J. F. Davis, M.A., BOREY, EXCHANGE, AND BANKING. In their Practical, Theoretical, and Lord Aspects. By H. T. Easton, A.I.B. Second Edition, Revised. In demy 8vo, cloth, 112 pp.	5/-
cloth, 112 pp.	•
of Corregan but I to Daughter on The Principles	6/-
	6-
The drift over, cloth Rift, 123 pp	5 /
PODETTIE PROPERTY	8/6
F. SPALDING, AND FOREIGN BILLS IN THEORY AND IN PRACTICE. By BASTLER EXCHANGE, BY W. F. SPALDING, In demy 8vo, cloth, 375 pp. Jillustrated	7/8
Mustrated F BANK CLERKS He II F F F STALLES ON BANKING TO BANK CLERKS He II F F F STALLES ON BANKING TO BANK CLERKS He II F F F STALLES ON BANKING TO BANK CLERKS He II F F STALLES ON BANKING TO BANK CLERKS HE II F F STALLES ON BANKING TO BANK CLERKS HE II F F STALLES ON BANKING TO BANK CLERKS HE II F F STALLES ON BANKING TO BANK CLERKS HE II F F STALLES ON BANKING TO BANK CLERKS HE II F F STALLES ON BANKING TO BANK CLERKS HE II F F STALLES ON BANKING TO BANK CLERKS HE II F F STALLES ON BANK CLERKS HE II F F F STALLES ON BANK CLERKS HE II F F F F F F F F F F F F F F F F F F	
	2/6
TABLES, By WILLIAM SCHOOLING. In crown 4to, cloth	2/6
	٠.
INSURANCE .	
THE DESCRIPTION OF INSURANCE BY J. AMPRED EXE. In CONVASENCE, BUT DESCRIPTION OF THE PROPERTY	/-
With sections A. Warten, B. F.R.A.S. A complete and practical exposition	,-
BORROO, RC	_
jit, 440 pp 1 . Not 10	۸.

FUIDE TO LIFE ASSURANCE. By S. G. Leigh, F.I.A. In crown 8vo, cloth gitt, 102 pp. 102 pp. 102 OFFICE ORGANIZATION, MANAGEMENT, AND ACCOUNTS. BY T. E. YOUNG, E.A., F.R.A.S., and RICHARD MASTERS, A.C.M. Second Edition,	14
Revised. In demy 8vs, cloth gilt, 146 pp. 3UDE TO MARINE INSURANCE. By HENRY KRAIR. In crown 8vo, cloth 8th, 203 pp.	5/- 2/8
THE PRINCIPLES OF MARINE LAW. (See p. 11.)	
SHIPPING	
EMPEDIG. By A. HALL and F. Haywoon. In crown Suo, cloth, 136 pp. Bet EMPEDIG OFFICE ORGANIZATION, BANAGEMENT, AND ACCOUNTS. By ALFERD CALVERT. In denv Su., cloth cit, 203 pp. Het EXPORTER'S HANDBOOK AND GLOSSARY. By F. M. Dudaney. With Freeward by W. Eglington, In denv Nov., rooth gill, 254 pp. Het CONSULAR REQUIREMENTS FOR EXPORTER'S AND SHIPPERS TO ALL PARTS OF THE WORLD. By J. S. Nowers, In crown Suo, cloth, 31 pp. Het THE WORLD. By J. S. Nowers, In crown Suo, cloth, 31 pp. Het CASE AND PRECIOH OOSTS. The purciples of calculation retaining to the cost of, and freight on, sca or commercial cases. By A. V. E. CROSFILLD. In crown Suo, cloth, 62 pp. Het CASE AND PRECIOH OOSTS. The purciples of calculation retaining to the cost of, and freight on, sca or commercial cases. By A. V. E. CROSFILD. In crown Suo, cloth, 62 pp. Het CASE AND PRECIOH OOSTS. The purciples of calculation retaining to the cost of, and freight on, sca or commercial cases. By A. V. E. CROSFILD. In crown Suo, cloth, 62 pp. Het CASE AND PRECION CONTROL OF THE	2'- U- 2'0 U-
STEVERI. In demy 80%, claim, 200 pp.	-
SECRETARIAL WORK	
COMPANY SECRETARIAL WORK. By E. MARTIN, I.C.I.S. In crown 8vo, cloth, 154 pp.	1/6
	2/6
GUIDE TO COMPANY SECRETARY. IN THE COMPANY SECRETARY STATE OF THE COMPANY SECRETARY. By ARTHUR COLE, FC IS. Bustrated with 75 lacounile forms. Second Intron. Revised and Indiaged. In Fig. 19 Sec. 19 Se	2/ -
demy 8vo, cloth gait, 42 pp. SECRETARY'S HANDBOOK. Edited by Herrer E. Beain. In demy 8vo,	V-
cloth gt t, 168 pp. Cloth gt t, 168 pp. Ref Crupon Palls of Gray's Inn. Barrister-at-Law.	5/ -
CHIN RIL 168 PE ANUAL DY GERMON PAIRS of GRAVE Int. Barristo-of-Low-Bet Barristo-St. 1884 Bet BROWNERS: HOW TO READ AND UNDERSTAND THEM BY DIME	3/6
PROSPECTUSES: BOW TO READ AND UNDERSTAIN THEM. PY THING TOWN, I CLE. In down Nov. of the "t, too FIG." OUTLINES OF TRANSFER PROCEDURE IN CONJECTION WITH STOCKS, SHARES, AND DEBENTURES OF JOINT STOCK COMPANIES. By F. D. HEAD, BA (Uxon), of Innotes's Inn, Emeristral-Law. In demy 800, Colt. Blad, B. A. (Uxon), of Innotes's Inn, Emeristral-Law. In demy 800, Colt. Wall	2/6
Rel. 112 PP. THE TRANSFER OF STOCKS, SHARES, AND OTHER MARKETABLE SECURITIES. THE TRANSFER OF STOCKS, SHARES, AND OTHER MARKETABLE SECURITIES.	1/6
Edition, Revised and Enlarged in delite was, Cran car, 12 pp.	5/- 9/6
HOW TO TAKE MINUTES. Fdited by E. MARTIN, F.C.I.S. Second Edition,	2/6
Enlarged and Retiod. Property of the property	
a Company Servitary. Fully districted with the december of the action on special branches of Servetarial Work. With contributions by nearly so cunnent authorities. Flated by Philip Tovyy, 15, 1.5. In one vol., balf leather cib. not up. Third Lettion, Revised and En 1864 PACSIMILE COMPANY FORMS. (See p. 4) COMPANY ACCURTS. (See p. 3) COMPANY LAW. (See p. 11)	35/ -
INCOME TAX	
PRACTICAL INCOME TAX. A Guide trathe Preparating of Income Tax Returns, By V. I. Say, 1907. IN OWNE TAX AND SUPER-TAX PRACTICE. Including a Dictionary of Income Tax and specimen returns, showing the effect of refut enactments down to the Finance Act, 118, and revisions in the Coffix. S. W. E. Savashiso. Third Edition, Revised and kinlarged. In demy 8vo, cloth stilp 348 pp.	15/-

COAL MERCE EXCESS PAYMENTS. Guarantee Payments and Lories for Glood Mines. Deals with the Agreement sutered into between the Coal Courtofler and the Collect Courses. See W. F. Sen Links. In demy 8 wo, clash gift, 150 pp Het	19/8
DECOME TAX AND SUPER-TAX LAW AND CARES. Including the Finance Act, 2018. With an Analysis 1 the Schedules, Good to Income Tax Law, and Notes on Land Tax. By W. E. Sontings. Third Edition, Revised. In demy 8vo, 100 and 120	
cloth gilt, 422 pp. EXCESS PROFITS (including Excess Mineral Rights) DUTY, and Levies under the	12/6
massemers of Inland R. vo. av. By W. E. Symling. Fourth Edition, Revised and Enlarged. In deniv 800, cloth gdt, 422 pp.	12/8
BUSINESS ORGANIZATION AND MANAGEME	ŊŢ
OFFICE ORGANIZATION AND MANAGEMENT, INCLUDING SECRETARIAL WORK. By Lawersce R. Dicksey, M.Com., F.C.A., and H. E. Blain. Routh Edition, Revised I. L. deny say, Coth Rill, 200 pp	
Fourth Edition, Resisted L. denve Sve, cloth gilt, 306 pp	7/6
Manual of intermation and direction on matters connected with the work of	
Officials of Municipalities Edited by W. Bateson, A.C.A., F.S.A.A. In crown 4to, half leather 4th, with 250 forms, diagrams, etc., 503 pp Ref.	25/-
COUNTING-HOUSE AND FACTORY ORGANIZATION. By J. GILMOUR WILLIAMSON. In demy 5vo, cloth gail, 182 pt. Ret.	8/-
E. A. COPE, and H. W. H. ROMES. In demy 8vo, cloth gilt, 170 pp., with	••
numerous forms	5/-
and I farm famoure 1 Cl In day when cloth gift tag pm	6/-
CLUBS AND THEIR MANAGEMENT. BY PRANCIS W. PIXLEY, F.C.A. Of the Muddle People, Harriver-di-law. In denny Nov., 10th Rill, 240 PD. BORAFREY BUSINESS GOGANIZATION, MANAGEMENT AND ACCOUNTS. BY	7/8
DRAPERY BUSINESS ORGANIZATION, MANAGEMENT AND ACCOUNTS. By I. ERNEST BAYLEY, In demy 8vo, cloth gilt, 302 pp	8/-
I. ERNEAT BAKERY. In demy 800, cloth gut, 302 pp. GROGERY BUSINESS ORGANISATION AND MARAGEMENT. By C. L. T. BEKLING and J. ARTHER SMART. Second Edition. In demy, 800,	-
cloth, 160 pp	8/-
INDUSTRIAL TRAFFIC MANAGEMENT. By Gro. B. Lissanden. With a Foreward by C. I. Mo-Grave. In themy 8vo. cloth gelt, 250 pp Not	7/6
SHIPPING ORGANIZATION, MANAGEMENT AND ACCOUNTS. (See p. 7.) INSURANCE OFFICE ORGANIZATION, MANAGEMENT AND ACCOUNTS. (See p. 7.)	
BANK ORGANIZATION AND MANAGEMENT. (See p. 6.) PROCEBROKERS' OFFICE ORGANIZATION, MANAGEMENT AND ACCOUNTS.	
	•
NEW CARD INDEX SYSTEM. Its Principles, Uses, Operation, and Component Parts. In Assembly, Parts, In Assembly, Parts, Parts, In Assembly, Parts, Parts	1/6
Requirements By I. A. Core In crown 8vo, cloth gilt, 200 pp., No.	2/6
A MARUAL OF DUPLICATING. By W. DESBOROUGH. In demy 8vo, cloth, 90 pp.	2/-
ADVERTISING AND SALESMANSHIP	
ADVESTIGNO. BY HOWARD REFINE WATER. In crown 8vo, cloth, 140 pp Hot ADM. AUD SALES. BY HERREY N. CANON. In demy 8vo, cloth, 150 pp But THE TREORY AND PRACTICE OF ADVERTIGING. By W. DILL SCOTT, Ph.D.	1/6 7/6
THE THEORY AND PRACTICE OF ADVERTISING. By W. Dill Scott, Ph.D.	
ADVERTISMA AS A BUSINESS PORCE. By P. T. CHERTHOSON. In demy Syc.	7/6
coth gilt, see ADVERTISING ARRANGEMENT. By F. A. PARSONS. Size 716. by 104 5 4th, 128 pp, with many illustrations He THE NEW BUSINESSE Pty HARM TIPPER. In demy Swy, cloth gilt, 400 pp. Het PRESENT OF THE CHAPT OF SILENT AREN MARKET, A Guide to Adversisement Construction.	7/8
Size 7 to, by tol Whith, 128 pp, with many illustrations	8/- 8/8
THE CRAFT OF SILENA SALESMANSHIP. A Guide to Advertisement Construction.	-
THE CHAPT OF CLEAR'S SALESHARSHIP. A Guide to Advertisement Construction. By C. MARWELL TRECURING and J. W. FRINGF. FOREWORD T. SWINDOWN GEREDIAGNES. See, by L. Dv of in., cloth, 50 pp., drift illustrations. Het THE PROCEDURG OF ADVERTISING. By W. Dill. Scott, Ph.D. In depty 5vg.	5/-
	7/-
BALREMARKED. By W. A. CORRION and G. E. GRIMBOALE. In crown 8vo, cloth,	2/6
*** AOTRIAL SALESMANSHIP. By N. C. FOWLER, assisted by 29 experies alconnect, etc. In crown 800, cloth, the pp.	U-
COMMISSIONAL REAVAILABLE. MY ADERET IS. BULL. IN GROWN SYO, CLOCK ENG.	2/6
170,00	

BUSINESS HANDBOOKS AND WORKS OF 'REFERENCE

COMMERCIAL EMCYCLOPARDIA AND DICTIONARY OF BUSINESS. Edited	
by J. A. SLATER, B.A., LL.B. (Lond.), Burnser at Law. Assisted by about 50 specialists as contributors. A rehable and comprehensive work of reference on	
at commercial subjects specially written for the busy merchant, the commercial	
endent and the modern man of Millers. With numerous mans, illustrations,	
facsimile business forms and legal documents, diagrams, etc. in 4 vob., large crown 4to (each about 450 pp.), cloth git	13
Half leather gilt	64,
and a comprehensive guide to business specially	
designed for commercial students, clerks, and trochers. Edited by Robert W. Holland, M.A., M.Sc., LL.D. Assisted by upwards of an Specialists as con-	
to a sola cross ato cloth gift, about 900 pp., Villiand Ole, V.	18/-
BUSINESS MAN'S GUIDE. Edited by J. A. SLATIA, B A., IL.B. Seventh Edition.	W -
Revised. In crown 8vo, cloth, 520 pp. PUBLIC MAN'S GUIDE. Edited by J. A. SLATIR, B.A. LL.D. (Lond.). A Hand-	
book for all who take an interest in questions in the	
-ill on	3/6
LECTURES ON BRITISH COMMERCE, INCLUDING FINANCE, INSURANCE, BUSINESS AND INDUSTRY. By the Ry How, Parto Back Horn Laceson, 6	
gilt, 205 PP	7/6
THE MOMEY AND THE STOCK AND SHARE MARKETS.	1/6
In crown 8vo, cloth, 124 pp. THE EVOLUTION OF THE MONEY MARKET (1885-1915. An Historical and THE EVOLUTION OF THE MONEY MARKET (1885-1915. An Historical and The Special Development of Finance as a Centralizal, Co-	
Analytical Study of the Rise and Developm at of Finance as a Contained, Co-Analytical Study of the Rise and Developm at of Finance as a Contained, Co-Analytical Study of the Rise and Developm at 11 B. (Lond.), P.S., (Lorent, I. ad.),	
Analytical Study of the Rise and Diverging H. B. (Lond.), P.S., (Long., L. ad.), ordinated Force. By Ellis T. Fowell, Ll.B. (Lond.), P.S., (Long., L. ad.),	10/6
credinated Force. By ELLS 1, POWEL, LL B. (LONG), CASE (1974). Met In demy 8vo, citoth sell, 748 Pt. In demy 8vo, citoth grant 1980, 1981 H. A. P. TER HISTORY, LAW, AND PRACTICE OF THE STOCK EXCHANGE. HV A. P. TER HISTORY, LAW, AND PRACTICE OF THE STOCK EXCHANGE.	
POLEY, B.A., Barristral-Law, and b. H. CARRUSHERS CONT. of the Shock	V-
POLEY, B.A., Barrister-at-Law, and r. C. Karrister, P. C. Karrister, Scoon Edition, Revised. In denvi New, that Relative New Exchange. Scoon Edition, Parks of the Company	-
By J. E. DAY. In demy 8vo, cloth gdt. 242 pp. By J. E. DAY. In demy 8vo, cloth gdt. 242 pp. By J. A. SLATER.	7/6
By J. E. DAY. In demy 800, clott kit, 214 PRODUCTS. By J. A. SLATER, DICTIONARY OF THE WORLD'S COMMERCIAL PRODUCTS. By J. A. SLATER, DICTIONARY OF THE WORLD'S COMMERCIAL PRODUCTS. By J. A. SLATER, DICTIONARY OF THE WORLD'S COMMERCIAL PRODUCTS.	2/6
B.A., LL.B. (Lond.). Second Edition of tot one one pronounceable	
B.A., I.L.B. (LONG.). Second Enterty of the company pronounceable artificial words, all of ten letters. By A. W. E. CROSPFILD. Size 12 in. by 17 in., Bell artificial words, all of ten letters.	 .
artificial words, all of ten letters.	22/
cloth DESCOURT, COMMISSION, AND BROKERAGE TABLES. By ERVEST HEAVINGHAM. Met	1/6
Size 3 in, by 44 in., cloth, 160 pp.	
Size 3 in. by 44 in., cloth, 100 pp. BUSINESS TERMS, PERASES, AND ARBREVIATIONS. Fourth Edition, Revised and Enlarged. In crown 8vo, cloth, 280 pp. and Enlarged. In crown 8vo, cloth, 280 pp.	\$/-
and kniargen. In crown a course (a town or 1 000 terms	
and 500 abbreviations used in commerce, with definitions. Size 3 in. by 41 ch.,	1/6
cloth, 126 pp.	
cloth, 126 pp. TRAINWAY RATING VALUATIONS AND INCOME TAX ASSESSMENTS. RV TRAINWAY RATING VALUATIONS AND INCOME TAX ASSESSMENTS. RV F. A. MITCHESON. In demy 80%, cloth git F. A. MITCHESON. A besieved from the proceeding. The foreign 50% of the control of the co	2/6
F. A. MITCHESON. In demy 80%, COURT PROCEDURE. Soulscap 80%,	1/0
	~
A COMPLETE GUIDE TO THE IMPROVEMENT OF THE MEMOLY. By the late	1/0
Rev. J. H. Bacon. In R J. Davies. That Edition, In	•
BOW TO STUDY AND REMEMBER.	94
TO STUDY OF THE PROPERTY OF THE HEAVE PROPER	111-
ACTS. Size q in. by 51 in., 50 pp., specially ruled, d. Both	~~~~
A.C.T.S. Size of in. by 5 in. by 5 per control of the 260 pt. TRANSEN METABOORS. Laborous by Richard Brayns. Desays and Despire Accounts. By Richard Brayns. Grossy and Grossen Accounts. By W. F. Tobushi. Legislating and Promonogan' Accounts. By S. W. Francis	
Desputy and Desputy Accounts. By W. F. TSPHANE	-
Second and Ironmongers' Accounts. By S. W. PRANCIS	

COMMON COMMODITIES OF COMMERCE AND INDUSTRIES

2/1

1/6

•
Each book in serven 8vo rioth, with many clustrations, about 130 pp.
TEA. From Grower to Consumer. By A. IBBETSON.
COFFEE. Prom Grower to Consumer. By B. B. KEABLE.
SUGAR Cane and Beet. By GLO. MARTINFAU, C.B.
OILS. Animal, Vegetable, Emential, and Mineral. By C. AINSWORTH MITCHELL.
BA, FIC.
WHEAT AND ITS PRODUCTS. BY ANDREW MILLAR.
RUBBER. Production and Utilisation of the Raw Product. By C. SEADLE and
H. P. STEVENS, M.A., Ph F.LC
IRON AND STEEL. Their Production and Manufacture. By C. Hoop.
COPPER. From the Ore to the Metal. By H. K. PICARD, Assoc. Royal School of
Mines, Mem, Inst of Min and Met.
COAL. Its Origin, Method of Working, and Preparation for the Market. By FRANCIS
H. Wilson, M.Inst M.J
TIMBER. From the Forest to its Use in Commerce. By W. BULLOCK.
LEATHER. From the Raw Material to the Finished Product. By K. J. ADCOCK.
COTTON. From the Raw Material to the Finished Product. By R. J. PEAKE.
OF THE PROPERTY OF THE PROPERT
SILE. Its Production and Manufacture. By Leries Hooses.
WOOL. From the Raw Material to the Finished Product. By J. A. HUNTLE.
LINEN. From the Field to the Finished Product. By ALFRED S. MOORE.
TUBACCO. From Grower to Smoker. By A. E. Tanner.
CLAYS AND CLAY PRODUCTS. By ALFRED B. SPARLE.
PAPER. Its History, Sources, and Production. By H. A. MADDOX Silver Medallist.
Paper-making 1 200.
SOAP. Its Composition, Manufacture, and Properties. By WILLIAM A. SIMMONS,
B.Sc. (1 on 1, 11, S.
GLASS AND GLASS MAKING. By P. MARSON
William AND DECIME MAIN COMMENT TO THE PROPERTY OF THE PROPERT
GUMS AND RESINS. Their Occurrence, Properties, and Uses, J'v ERNEST J.
PARKY, D. D. , T. L. C.
THE MOTOR INDUSTRY. By HORACE WYATT, B.A.
THE BOOT AND SHOE INDUSTRY. BY 1 S. HARDING
GAS AND GAS MAKING. BY WELL IN WEBSIR
FURNITURE. By H. F. BINSTEAD
COAL TAR AND SOME OF ITS PRODUCTS. By A. R. WARVES, P.C. S., A.I. Mech.E.
PETROLEUM. By ALBERT I most it, I ditor of the " Petroleum Times,"
SALT AND THE SALT INDUSTRY. By A F. CALVERT.
KANTIED CABRICE. By J. CHAMBERLAIN and J. H. QUILTER.
WIND D. T. L.

LAW

THE ELEMENTS OF COMMERCIAL LAW. By A. H. Douglas, LL.B. (Lond.
THE COMMERCIAL LAW OF ENGLAND. By I A. SLATER, B.A., LL.B. (Lond.
THE LAW OF CONTRACT. By R. W. HOLLAND M.A. M.S. II D. OLGE, M.J.
QUESTIONS AND ANSWERS IN COMMERCIAL LAW. By J. WELLS TRATCHE
parriance in the in the state of the state o
11.1). Clock then by the state of the
ELEMENTARY LAD. By F A Copy to come to a total and a
Frition, In course 800, claim 210 mg
SOLICITOR'S CLEEK'S GUIDE. An introduction to the most of a coluitor
gilt, 210 pp.
CONVEYARCING. By E. A. COPE In crower Says cloth and me
TRUSTEES, With a Chapter on Intestacy, B
ARREAD W RELEASING TURINALIK CUNTURY WADRE CROPING CHARACTURE
. LAWRENCE DUCKWOMM, Rabitalinal Jam. 1
BERCANTILE LAW. By J. W. SLATER, B.A., LL.B. (Lond.). In domy fron cheef
Bdition

•	
ETLES, CHEQUES, AND NOTES. By J. A. SLATER, B.A., I.L.B. Third Edition.	
In demy 8vo, cloth got, 214 pp.	ø-
PRINCIPLES OF MARINE LAW. By LAWRENCE DUCKWORTH. Third Enton, Revised and Enlarged. In demy 800 clath gut, 400 pp.	
OUTLINES OF COMPANY LAW. By F. D. HEAD, B.A. (Oxon.). in dring be.).	74
cioth, 100 DP	2/-
GUIDE TO COMPANY LAW. By R. W. HOLLAND, M.A., M.Sc., LL.D. In crown	•
8vo, cloth gilt, 203 pp	2.6
EXAMINATION NOTES ON COMPANY LAW. By R. W. Holland, MA, MS.	
LL.D. Cloth, 64 in, by 34 in , 50 pp. COMPANIES AND COMPANY LAW. Together with the Companies (Constitution)	1
Act. 1008, and the Act of 1913. By A C. CONNELL LL.B. (Lond.), Second	
Edition, Revised. In demy 8vo, cloth gat, 348 pp	8/-
COMPANY CASE LAW. A digest of leading decisions. By F. D. HEAD, B.A. (Oxona).	-
In demy 8vo, cloth gilt, 314 pp	7/6
THE STUDENT'S QUIDE TO RAILWAY LAW. By ARTHUR L. CHAPMAN, MA.,	
LL.D. (Camb.). In crown 8vo, clein gat, 200 pp	2-6
cloth gilt. 450 pp. Net	10.6
THE LAW RELATING TO SECRET COMMISSIONS AND BRIBES CHRISTMAS	
BOXES, GRATUITIES, TIPS, etc.). The Prevention of Corruption Act. 1906.	
By Albert Crew, of Gray's Inn, and the South-Lustern circuit, Burrister-al-Law	
In demy 8vo, cloth gilt, 108 pp. MRARITED HOUSE DUTY. By W. F. SNILLING. In demy 8vc, cloth g 't, 157 pp.	5/-
Ret	12/6
THE LAW OF CARRIAGE. By J. E. R. SIEPHENS, B.A., of the Middle Lempie,	
Barvister-at-Law. In demy 8vo, cloth g it, 340 pp.	5/ -
THE LAW RELATING TO THE CARRIAGE BY LAND OF PASSENGERS.	
animals, and GOODS. By S. W. CLARKE, of the Middle Temps, Barrister- at-Law In demy 8vo, cleth gilt, 350 pp. Not	7'6
THE STITLENT'S GUIDE TO BANKRUPTCY LAW AND WINDING UP OF	
COMPANIES. By F. PORTER PAUSSEI, BA, LLB, Barrister-at-Law In	
erown Sun cloth mit, 106 pp	2/8
BANKRUPTCY, DEEDS OF ARRANGEMENT AND BILLS OF SALE. By W.	
VALENTINE BALL, M.A., and G. Mills, B.A., Barristers at I are 1 and Edition, Revised and Enlarged. In demy 800, cloth gilt, 104 pp. Not	5/-
FARM LAW. By M. G. Johnson In demy 800, cloth gar, 100 pr	2'6
GUIDE TO THE LAW OF LICENSING. The Handbook for in Licence Holds	
Bu I Wesse Transcript In demy S. v. cloth felt, 140 pp	5/-
LAW OF REPAIRS AND DILAPIDATIONS. A Handbook for Students and Prac-	
titioners. By T. CATO WORSTOLD, M.A., LL.D. In crown evo, cloth-gett,	2/6
TARE OF PURPOSE A Hamiltonik in Students and Practitioners Hy	-,-
W. NEWBRADD HIRRIET, LL. I) HARRELL, DIFFINITE AT LAST WELLS	
In crown the child that to Second to the Second to	6/-
THE LAW OF PROCEDURE. A Handbook for Stitlents and Practitional Control	5/-
the same author. In deny two cloth get, 12, pp.	• •
HANDBOOK OF LOCAL GOVERNMENT LAW. By J. Wells THATCHER. In large grown 8to, cloth gilt, 250 to	3/6
MOTE I AND DET ANTOIR MO THEE CHILD. ITS PROTECTION, EDUCATION, AND	
EMPTITY WIENT BY R. W. HOLLAND, Man, Man, Man, Man, Man, Man, Man, Man	
	W-
ENCOME TAX AND SUPER-TAX LAW AND CASES. (See p. 8.)	, -

FOREIGN LANGUAGES

FRENCH

A CHILD'S FIRST STEPS IN FRENCH. By A SIZETFLLY. An order of the vicabulary. Intestined, in cross No, imp of the FRENCH COURSE. Part I. in cross No., its principle of the FRENCH COURSE. Part II. (In preparation). FRENCH COURSE. Part II. (In preparation). FRENCH COURSE. Part II. (In preparation). FROM CREAM ARE. IN '19. F. A. Hydrocke, M. (Also in 2 web. Part II. 3 6 set; Part II. 3 6 set). (ALSO IN 2 Volv. PART I, 3 6 net; PART IL #/6 net)

BAST FRENCE CONVERSATIONAL SENTENCES. In crown 8vo,43 9p.

APPARICED FRENCE CONVERSATIONAL EXPECTED. In crown 8vo,43 9p.

POSTEMPS' YADE MEGUN OF PRINCE COLLOQUIAL CONVERSATION. Hands se for the pocket, citch CEF VOCABULARIES AND IDSOMATIC PERASES. By E. J. KEALS In crown Swo, 151 pp.

RADUATED LESSONS IN COMMERCIAL PRENCH. By F. MARSDEN. on, cloth, 168 pp. F. W. SETTH. In crown 8vo, cloth, 576 pp.
FRENCH RECIPER LE BOI LION ET SES GRANDS VASSAUX. DRAFER, M.A., B &s L. 10 crown 8vo, amp cloth, 56 pp. . . CONSERCIAL FRENCE GRAMMAR. By F. W. M. DRAFER, M. crown 8vo, cloth git, 106 pp.

BAPID METHOD OF SIMPLIFIED FRENCH CONVERSATION. HISDERS, In crown Svo, cieth, 192 pp.
ADUATED FRENCH-ENGLISH COMMERCIAL CORRESPONDENCE. MADRICE PRESUR SUBLISH COMMENCIAL COMMENCIAL MADRICE DENEWS IN COURS 8vo, 100 pp.
FERROR BUSINESS LETTERS. First beries. In crown 410, 32 pp.
FERROR BUSINESS LETTERS. By A. H. BERNARDT. Second COWER SVO. 48 pp.

COMMERCIAL CORRESPONDENCE IN FRENCE. In crown 8vo. cloth, 240 pp.

REMONSTILE CORRESPONDENCE. English-French. In crown 8vo. cloth 2vo pp. II

MODELS AND EXERCISES IN COMMERCIAL FRENCE. By E. T. Getterring, M. In crown 8vo, cloth 250 pp. He In crown 8vo, cluth, 180 pp.

Het
FRENCE COMMERCIAL PHRASES AND ABBREVIATIONS WITH TRANSLATION. In crown 8vo, 32 pp

FRENCH BUSINESS CONVERSATIONS AND INTERVIEWS. In crown 8vo. Nump cloth
READINGS IN COMMERCIAL FRENCH. With Notes and Translations READINGS IN COMMERCIAL FRENCE. With Notes and Translations in English. In crown 800, de th, po p Not PREMISE OF STREET, IN COMMERCIAL READING. IN COMMERCIAL READING STREET, IN COMMERCIAL READING STREET, IN COMMERCIAL READ TERMS. Size 210 to 6 in., doth, rounded corners, \$40 pp. Not VEST POLEMENT LIST OF ENDINGS OF FRENCE REGULAR AND AUXILIARY VERBS. With Notes on the Participles and the Infinitive. Size 21 in. by 15 in. 45 pp. 48 pp.

7/8

2/8

1/-

u

1/6

1/4

GERMAN

GERMAN OURSE. Part I. 3d net. Cloth

KEY TOMGERMAN OURSE. In crown 8vo
PRACTICAL GERMANG GRAMMAR. In crown 8vo
Raty LESCOS IN GERMAN. By J. BITHELL, M.A. In crown 8vo, cloth,
116 pp.
PAST GERMAN OUNVERSATIONAL SERTENCES. In crown 8vo, 32 pp. He
ADY AREAD GERMAN OUNVERSATIONAL SERTENCES. In crown 8vo, 32 pp. He
ADY AREAD GERMAN OUNVERSATIONAL SERTENCES. In crown 8vo, 32 pp. He
FOWLISTS VADE MEGUM OF GERMAN OULLOQUIAL OUNVERSATION. In
crown 8vo, cloth
EXAMINATION HOTTS ON GERMAN. By A. HARCHAVEN, M.A., Ph.D. Cloth,
64 in by 34 in., 56 pp.
GERMAN EXAMINATION PAPERS WITH MODEL ANSWERS. In crown 8vo,
45 pp.
CHEMAN EXAMINATION PAPERS WITH MODEL ANSWERS. In crown 8vo,
45 pp.
GERMAN BUSINESS DITERVIEWS. Nos. I and 2. Each in crown 8vo, cloth
yell, 158 pp.
CHEMAN BUSINESS DITERVIEWS. Nos. I and 2. Each in crown 8vo, limp cloth
No. 1, 100 pp.; No.; 74 pp.
CHEMAN BUSINESS DITERVIEWS. Nos. I and 2. Each in crown 8vo, cloth,
200 pp.
CHEMAN BUSINESS DITERVIEWS. Nos. I and 2. Each in crown 8vo, cloth,
201 pp.
CHEMAN BUSINESS DITERVIEWS. Nos. I and 2. Each in crown 8vo, cloth
202 pp.
CHEMAN BUSINESS DITERVIEWS. Nos. I and 2. Each in crown 8vo, cloth
203 pp.
CHEMAN BUSINESS DITERVIEWS. Nos. I and 2. Each in crown 8vo, cloth
203 pp.
CHEMAN BUSINESS DITERVIEWS. Print Spries. In crown 8vo, 48 pp. He
EXERCANTILE ORRESPONDENCE IN GERMAN. In crown 8vo, 48 pp.
CHEMAN BUSINESS LETTERS. First Spries. In crown 8vo, 48 pp.
EACH
EXTENDITION OF THE PRINT OF THE PRINT

. SPANIRH	
BAST SPANISH CONVERSATIONAL SENTENCES. In crown Swo, 32 pp Hat	
PAST PARTIE CONVERTATIONAL EXPERIENCES. In crown Swo, 31 pp Let ADVANCED BY ARRISE CONVERSATIONAL EXPENSES. In crown Swo, 31 pp	Ĭ
BRANIBATION NOTES ON SPANISH. By ALVERD CALVERY, Cloth, 64 in, by	1
CONTRECTAL SPANISH GRANMAR. By C. A. TOLEDANO. In crown Svo. cloth	4
PARTIE VERBS, Regular and Irregular. By G. R. Macdonald. In crown 500, cottle, 150 pp.	ì
CONTROL AT CORPORATION OF THE CONTROL OF THE CONTRO	ž
MANUAL OF SPARISH COMMERCIAL CORRESPONDENCE. By G. R. MACOUND SPARISH COMMERCIAL CORRESPONDENCE. By G. R. LESSONS DR SPARISH COMMERCIAL CORRESPONDENCE. By the same Author.	4
SPANISH COMMERCIAL READER. By G. R. MACDONALD. In crown two sloth	2/
READINGS IN COMMERCIAL SPANISH. With Notes and Translations in English	t/
	2/
SPANISH COMMERCIAL PHRASES. With Albraviations and Translate	84
SPANISH BUSINESS CONVERSATIONS AND DETERMINED With Control of the	
BY AND ENGLISH AND ENGLISH-SPANISH COMMERCIAL DICTIONARY. By	2
ITALIAN	7/
TOURISTS' VADE MECUM OF ITALIAN COLLOQUIAL CONVERGATION	
COMMERCIAL ITALIAN GRAMMAR. By Luigi Ricci. In crown Svo, cloth git,	V
ERCANTILE CORRESPONDENCE. English-Italian. In crown 8vo, cloth,	V1
TTALIAN BUSINESS LETTERS. By A. Valginigli. In crown 8vo, 45 pp Met	ú
MISCELLANEOUS •	
PRACTICAL PORTUGUESE GRAMMAR, By C. A. and A. Toledano. In crown by cloth, to pp. RECLASTILE CORRESPONDENCE. English-Portuguese. In crown Syo, cloth,	V.
	W
MACDONALD. In COMPANY, (19th, 198 pp. Bet 2 DIOTTOMARY OF COMMERCIAL CORRESPONDENCE IN EMGLISH, PRINCE, GERHAN, SPANISH, ITALIAN, FORTUGUESE, AND RUSSIAN. That	/
GERMAN, SPANISE, ITALIAM, PORTOGUESE, AND RUSSIAM, Thard Revised Edition. In demy 800, cloth, 718 pp. THE PORTOGO CORRESPONDENT. By Lant Davies. In grown 800, cloth, cloth,	y
Sono	/1
COMMENCE TERMS IN FIVE LANGUAGES. Being about 1 non terms and purases used in commence, with their equivalent in French, German, Spanish, and Italian. Size 5 in. by 4 in., footh, 178 pp.	/
•	
PITMAN'S SHORTHAND	

All books are in foolscap to sale unless otherwise sta

INSTRUCTION ROOKS

Contrary Edition.

FINAL'S SHOREMAN TRACELER An elementary work suiter for a or class techning lineages An elementary ware un or class techning in the control of the control of East to "Fitness" substituted that the Books : Elem and Advanced

1,

PETMAN'S SHORTHAND READING LESSONS. Nos. 1, 2 and 3	-
KETS TO "PITMAN'S SHORTHAND READING LESSONS." Nos. 1, 2, and 1 Re	I 2
PETMAN'S SECRETARD COPY BOOKS, No. 1, 2, 3, and 4. An entirely be	_
EXTS TO "PITEAR'S SHORTHAND READING LESSING." Nos. 1, 2, and 1 Extrading SOUTHAIN COPY BOOKS. Nos. 1, 2, 3nd 4. An entirely to write revering the theory of the system. Proticap 4to (84 m. by 64 m.)	ä a t
PARMAN'S SHORTHAND DRILL EXERCISES. Obions	· •
COMPERD OF PITMAN & SHORTHAND.	. <u>I</u>
PITMAN'S SHORTHAND INSTRUCTOR. Complete Instruction in the System. Co.	th 47-
Eey. 1/6 ; clo	th 🖭
THE CENTENARY CHANGES IN PITMAN'S SHORTHAND. In crown 8vo .	. Î4.
SUMMARIES FROM "FITMAN'S SHORTHAND INSTRUCTOR." Size, 2	
by 4 in	. 14
PITMAN'S SHORTHAND MANUAL. Contains instruction in the Intermediate Styl	le,
with 100 leavings	. 2/-
Clo	th 2/8
The state of the s	ey 84.
PITMAN'S SHORTHAND GRADUS. Writing Exercises in ordinary print for Manu	ral 94
PITMAN'S SHORTHAND REPORTER. Containing instruction in the Advance	
Style: with 52 Exercises	. 2/6
Q _r	th 3/-
E PRODUCTION OF THE PRODUCTION	
	In
ordinary print, countred for do tation	
PITMAN'S SHORTHAND CATECHISM. In crown 8vo PITMAN'S SHORTHAND WRITING EXERCISES AND EXAMINATION TESTS.	1/6
	In
crown 8vo, paper b ards	<u>.</u> ≱/-
THE STOP A STOP TO THE OWN PARTY AND THE STOP TH	Key 8/6
EXAMINATION NOTES ON PITMAN'S SHORTHAND. By H. W. B. Wilson. 81	
by 1 to, cloth	. 1/6
GRADED SHORTHAND READINGS.	
Elementary, with Key. In crown 8vo, oblong	. 64
Intermediate, with Key. In crown byo, oblong .	. 8d.
Advanced with Yes In community of the	. 84.
Advanced, with Key. In crown two oblong GRADUATED TESTS IN PITMAN'S SHORTHAND. Illustrating all the rules in the	. 84.
Intermed the Steller In match of the match o	ıe
Intermed are Style. In note-book form, post Sv. (64 in by 14 in.), with rule paper	rd
PROGRESSIVE STUDIES IN PITMAN'S SHORTHAND.	. 84,
TALKS WITH SHORTHAND STUDENTS. By JAMES HYSES	. I/-
CHATS ABOUT PITMAN'S SHORTHAND. By GRORGE BLETCHER	. <u>1</u> /2-
LEGIURETTES ON PITMAN'S SHORTHAND. BY J. HAVES	. 1/-
BITMAN'S CHADTELAND BADOCHERAD, BY J. 11 VFS	. Ī/-
PITMAN'S SHORTHAND RAPID COURSE. A State of Twenty Simple Lessor covering the whole of the system and specially adapted for business purposes. I	14
crown 8vo	n 🕳
· Clot	
With Additional Exercises	y 2/-
PETER ANY ENOPTRANTA PARTY COMPANY ATTOMICS ATTOMICS OF	4/-
PITMAN'S SHORTHAND RAPID COURSE, ADDITIONAL EXERCISES ON PLANING EXERCISES ON THE RAPID COURSE (ID Shirthand), crown Byo, 62 pp	. 8d.
PETER A M & EDODES AND COUNTY OF THE RAIL COUNTY OF THE CO	p. 1 /-
PITMAN'S SRORTHAND COMMERCIAL COURSE. Specially adapted his conmercial students.	a-
mercial students Clot	h 4/-
PITMAN'S EXERCISES IN BUSINESS SHORTHAND. By A. BENJAMIN, 1.P.S.	es 1/-
(Homs.), F.C.Sp T.	»
formand a comb gr	. 1/9
•	
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	
GRAMMALOGUES AND CONTRACTIONS	
PRAMMALOGUES AND CONTRACTIONS. For use to classes FRET POCES T LISTOP GRAMMALOGUES AND CONTRACTIONS OF PITMAN	<u>.</u> M.
SENDENAND OF CHARMACOURS AND CONTRACTIONS OF PITMAN	8 04
SECRETAND. In. by the him cloth EXECUTES ON THE GRAMMALOGUES AND CONTRACTIONS OF PITMAN' SECRETAND. V J I' C GROW. In Shorthand, with Key. In. crown Sec. Imp. club.	. =
CHAPTIAN OF PITTER	5
imp cioth	7 41
TO BRANDER AND MEMORIES HIS OF MANY AND	
PROPERATE CAME IN 1 1 (A mix C - al mix many	B 43
now to Practise and Memorize the Grammalogues of Pitman's HORTHAND. Complete by D. J. Gronn. S.25 71 in. by 8 in.	. 95.
, , , , , , , , , , , , , , , , , , ,	
CHAILMAN AND DECOME ON A DECIS	
STORTHAND DICTIONARIES	
THE AND PROTEST AND CHICAGO AND DIOTIONARY	- m/e
THEAM'S ENGLISH AND SHIRTHAND DICTIONARY. I crown St. / 19, 820 pg	p. 7/8
PRIMARY PROPERTY SHORT FAND DIVITION ARY P. 104 A STREET COMMISSION AND COMMISSIO	3 6-
THE BY POCKAT SHORTHAND DICTIONARY. R vin 12100 (3) in by 12 in.). Clot	h <u>8/-</u>
COMPANIE A MANAGEMENT DESCRIPTION OF COAT OAC COAT	

SHORTHAND PHRASE BOOKS, ETC.	_
PROMOGRAPHIC PERASE BOOK AND GUIDES. Each in foxion 300.	*
Cloth Met Grant and Engineering, Railway, Ertate Agents, etc., Printing and Publishing,	*
Section and Regimeering, Railway, Eriats Agrett, etc., Printing and Publishing, Buntanes, Sanking, Stockroking and Francical, Commerces Loral, Municipal, Businers and Contractors, Shipring, Iron and Steel Trades, Civil Engineering.	
Bayal and Military, Chemical and Drug.	
an Ingroduction and Lists of Phrase grams, Cuttines, and Abbreviations. In	_
CONTRAID CLERE'S GUIDE, By VINCENT F. COLLINGE, A.C. I.S. In crown Svo.	
ciotha a grant and a contract and a	v
DICTATION AND SPEED PRACTICE BOOKS	
SPECIALISED CORRESPONDENCE BOOKS. (1) The Chemical Trade. (2) The	_
Paper Trade. (2) The Building Trade. In ordinary print GRADUATED DICTATION BOOKS. (2) Political Speeches. (2) Sermona. In	
ordinary print. In crown dvo	*****
GRADU TAD DICTATION BOOKS (New Street Land II) GRADUATED COMMERCIAL LETTERS FOR DICTATION. 61 pt. by 6 in.	Ü
REPORTING PRACTICE. lu crown 8vo, cloth	Ŷ
PROGRESSIVE DICTATOR. Third I utten. 1 cross 8c. cloth SEGRIFIAND CANDDATE'S DICTATION EXERCISES. 1 cross 8vo, cloth COMMERCIAL DICTATION AND TYPE WAITING	V
SPRED TESTS AND GUIDE TO RAPID WRITING IN SHOKTHAND. Incrown Svo.	
Coth FIVE MINUTE SPEED TESTS. With Introduction on A quintion of Speed by	킫
P. P. LACKSON IN COURT SUO, Cloth CUMULATIVE SPELLER AND SHORTHAND VOCABULARY, By CHARLES F. SMITH.	2/
In crown 800, pap r heards	¥
SPEED TRAINING IN PITMAN'S SHORTHAND. BY I ! MARRING R.	ä
AUQUISITION OF SPEED IN SHORTHAND. HV E. A. Cork. In ordinary print.	si
RECUM'S SHORT-CUTS IN SHORTHAND, By GEORGE BROWN, F.I.P.S. In	v
THE STEROGRAPHIC EXPERT. By W B BOTTOME and W. F. SMART. In demy	7/1
SHORTHAND COMMERCIAL LETTER-WRITER. Advanced Style 1 -: Key	64
Work commonly the tay of the Statement of the Advanced Style 13; Key	84
	2/1
TRADE CORRESPONDENCE IN SHORTHAND. In the Advanced Style. I 8; Key MISCRILANEOUS CORRESPONDENCE IN PITMAN'S SHORTHAND. First,	×
Second, and Third Series Advanced Style, with Keys in ordinary print. Each	
in crown 8vo, oblong. Lump cleth	v
SHORTHAND BEADING BOOKS	
In the Elementary Style.	
RAST BRADINGS. With Key	ě
LEARNER'S SHORTHAND READER. Illustrated.	i
PRRILE OF THE BUSH AND OTHER STORIES. In the Intermediate Style.	
PITMAR'S PHONOGRAPHIC READER No. L. With Key. Goth SULLIVER'S VOTAGE TY LILLIPUT, IS CONSTRUCT WITH Key. Cloth SUBMARDIA T AND CHEEK STORES. CUSTAGES.	2
SUBMARINE X7 AND OTHER STORIES. SUSSITIATED	è
	ž

MERROLAL READERS IN SHORTEAND. (1) Commercial Inclinions Commodities. (8) Londors of Commerce. (4) Galoways of British Comme	
In the Advanced Style.	
ONGRAPHIC READER II. With Eay	ai
MRISTRAS CAROL. By CHARLES DICKERS. 1/8: LES PROM DICKERS	Cloth Cloth
E RIGH OF FOUR. By Sir A. COMAN DOYLE	Cloth
EXTURN OF SHERLOCK HOLMES. Vols. I, II and III Each,	cloth
F-CULTURE By J. 5 BLACKIE. 1/-; Cloth, 1/8;	Ker
MOTIOUS FROM AMERICAN AUTHORS. With Key	
DURID THE WORLD IN CHEET YOU. It is set III Each, OURD THE WORLD IN CHEETY DAYS. BY JUNE VERVE JUNEAU BY JUNE VERVE LOUIS BY JUNEAU BY WASHINGTON INVINC. WITH KEY VAN WORLDE. BY WASHINGTON INVINCE. BY G. K. BUCKWALL, A.C.I.S. (Short Reling). 384 co.	•
OURSE IN BUSINESS TRAINING. By G. K. BUCKNALL, A.C.I.S. (Short	band
	•
SHORTHAND TEACHERS' BOOKS	
MAN'S SHORTHAND TRACHER'S HANDBOOK. In crown 8vo, cloth . IN OF LESSONS ON PITMAN'S SHORTHAND. Size 8 in. by 38 in., cloth	:
PARATION FOR A SHORTHAND TEACHER'S EXAMINATION. Size	8 in.
DECEMBERARY ON PHYMAN'S SECRETARYD. Bu I. W. Tavron. In feel	
Swo, cloth gilt, 448 pp. BENETHARD. By E. J. McNamara, M.A.	scap
METRODS OF TEACHING SHORTHAND. By E. J. McNamara, M.A. cruwn Svo, cloth	In
LET OF THE PROMOGRAPHIC ALPRABET. 22 in. by 35 in.	•
Mounted on canvas with rollers and varnished	Net :
ARTS ON PITMAN'S SHORTHAND. Twenty large Charts (22 in. by 31	in.)
LIVATIVE AND COMPOUND WORDS IN PITTERANT REPOPTERANTS. 2:: 17 \	Set . B.
WILSON. In foolscap 8vo TORY OF SHORTHAND. By SIR ISAAC PITMAN. Fourth Edition, Rev	
In grown 8vo, cloth	ised. Not i
	100
TYPEWRITING	
JUNIOR TIPLET. By ANNIE E. DAVIS Deniv Sw., cloth VOURSE IN TYPEWRITING. By Mrs. Smith CLOUGH. Large post 410 RAI'S TIPEWRITER MANUAL. Can be used with any machine. S. Redilion. The product of the control of the cont	Not
HAN'S TYPEWRITER MANUAL. Can be used with any machine. S	ixth
Edition. Large post 410, cloth	. 1
Edition, Large post 4th cloth EAN'S TYPEWRITING EXAMPLES for any machine— On cards, 40 examples, foolscap felio	. 1
In note-book form, in covers HAN'S EXCERCISES AND TESTS IN TYPEWRITING. Foolscap tolio. Que	. 1
cloth. Third Edition, revised 7 TO TRACE TIPEWRITING. By KATE PICKARD, B.A. (Lond.). Crown cloth	. 1
	4to.
CTICAL COURSE IN TOUCH TYPEWPITTING BU C I Swim Por	Not 1
Edition, revised and enlarged. Size, 8) in, by 11 in,	
THE TYPE WEITER MANIAL but No. 4 and a course of the cours	Not 1
class and illustrations. Ninth Edition. Large post 400 UALTRWOOD TREWRITER MANUAL. By A. J. Sylvester. Large post	Not 1
LOCK TYPEWRITER MANUAL. By A. J. SYLVESTER. Large post- LOCK TYPEWRITER MANUAL (Group System of Touch Typewriting).	4to
H. Erneared Laboratory (Group System of Tools Typewring). RECORD OF THE RECORD OF THE CONTROL OF	. 1
BUUTEURS ON THE REMINISTON (Nos. 7, 8, 10 and 11), YOST (No. 10),	and
ERN-TIPEWRITE AND MANUAL OF OFFICE PROGRAMME B. A	, (
Morrow. 64 in. by L'in., cloth	· -: 1
by man. Smith Clouds. In large post 4to	Not J
n PERIODICALS	
	um.
Weekly 8d., by	10 0 (
TES PRANISATION AND MANAGEMENT, Monthly 1/2 and her	post 2
root free. (Style) 18411-124 pp. AB 'S SHORTHAND WELLY. (Stab. 507.) Weekly 3d. by Abs. Abstractor AD EAFAGEMENT. Monthly. 1/8 net, by Abstractor Advantagement.	Tet 18
i's Complete Commercial alsi Shquhand Catalogues contaming PULL parti	

