

[Entered at the Post Office of New York, N. Y., as Second Class Matter.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LV.—No. 1.  
[NEW SERIES.]

NEW YORK, JULY 3, 1886.

[Price 10 Cents.  
\$3.00 per Year.]


## SIMPLE EXPERIMENTS IN POLARIZED LIGHT.

BY GEO. M. HOPKINS.

I.

It is ever a source of pleasure to the student of science to be able to explore an unfamiliar realm by means of commonplace and readily accessible things, which, if not already possessed, may be had almost for the asking.

There is scarcely a branch of scientific research more prolific in the development of expensive apparatus than that of light, yet there is nothing in the domain of physics capable of being better illustrated by apparatus of the most simple and inexpensive character. The subject of polarized light, as intricate and difficult as it may at first appear, may be illustrated by apparatus costing less than a dime, in a manner that can but excite the wonder and admiration of one inexperienced in this direction.

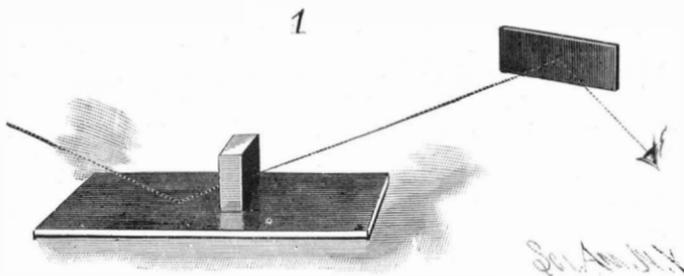

POLARIZATION BY REFLECTION FROM BLACKENED GLASS.

will produce no effect on the polarized beam, but most thick pieces of glass, such as paper weights, ink stands, heavy glass bottle stoppers, and the like, are either unannealed or only partly annealed, and are thus under permanent strain, which is readily indicated by their action on polarized light. A plate of mica of suitable thickness exhibits bright colors when examined by polarized light, particularly when the plate is either bowed or inclined.

To render the polariscope thus described more efficient, a plate of glass may be placed on the book, when the superior reflecting surface will at once make itself manifest in the increased brightness of the colors and improved definition of the object. A still greater improvement may be made by blacking one side of each glass with asphaltum varnish or any other convenient black varnish or paint, using in the experiments the unblackened surfaces, as shown in Fig. 1.

The angle which the incident light beam should make with the polarizer or horizontal blackened plate is  $35^{\circ} 25'$ , and the polarized beam should strike the analyzing plate at the same angle, to secure the maximum effects; but it is unnecessary to measure the angles, as they may be easily determined by the appearance of the object.


With the two plates of blackened glass much may be learned with regard to the properties of polarized light. Plates of mica of various thicknesses and forms, inclined at various angles, bowed and turned in their own planes, pieces of quartz, bodies of glass such as those already mentioned, and odd-shaped pieces of unannealed glass such as may be picked up at glass works, are easily secured objects. Brazilian pebble spectacle lenses often show gorgeous colors when turned at different angles in the beam of polarized light.

The writer well remembers the smiles provoked among the storekeepers when he visited various stationery

and fancy goods establishments, armed with a Nicol prism, in quest of objects for the polariscope. As one article after another was placed upon a dark covered book, and examined with the prism, the writer imagined he could vaguely hear such words as Ward's Island, asylum, etc., and at this stage, as a matter of policy, the purchases were generally made, for sanity was at once established when the dealer examined the articles for himself with the Nicol, and the price of certain glass objects immediately advanced.

Seeing their own wares by polarized light, for some of the dealers, at least, was a new experience.

The best position for the polarizing plate is near a window, with the broad light of the clear sky shining upon it.

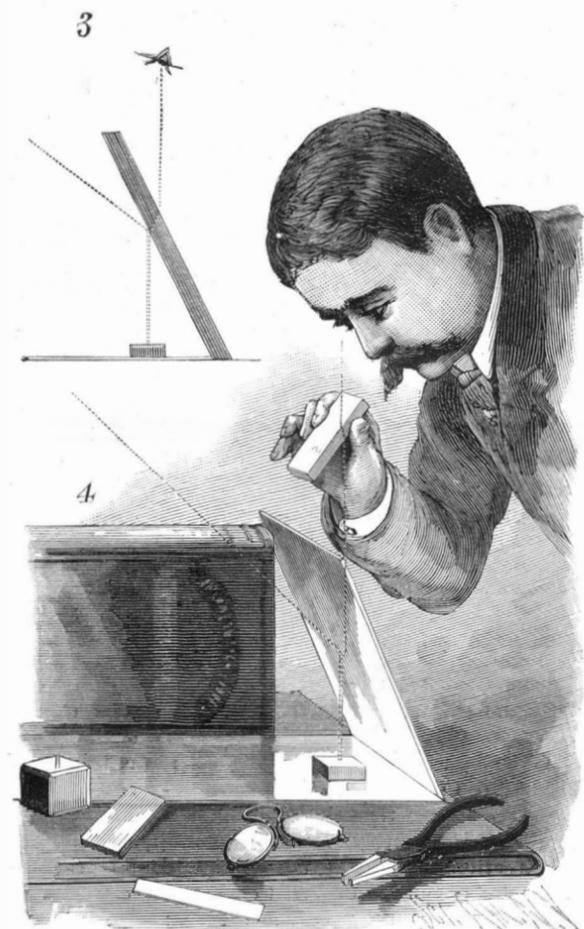


SIMPLE FORM OF NORREMBERG DOUBLER.

A small piece of window glass and a black covered book constitute the apparatus for beginning the study of this interesting subject, and with a glass bottle stopper, a glass paper weight, or a piece of mica, the effects of polarized light may at once be shown.


The book is placed horizontally near a source of light, such as a window or a lamp, so that a broad beam of light will fall obliquely on it, and upon the book is placed the object to be examined, which may be either of those named.

Now, by viewing the reflected image of the object in the piece of window glass, with the glass arranged at the proper angle, it is probable that colors will be seen in the object. If no colors appear, it is due to one of three causes: either the object is incapable of depolarizing the light polarized by reflection from the book cover, or it is too thick or too thin to produce interference phenomena, or the eye of the observer and the glass employed for the analyzer are not in a correct position relative to the object and the polarizer (the book cover).


The glass, if thoroughly annealed,

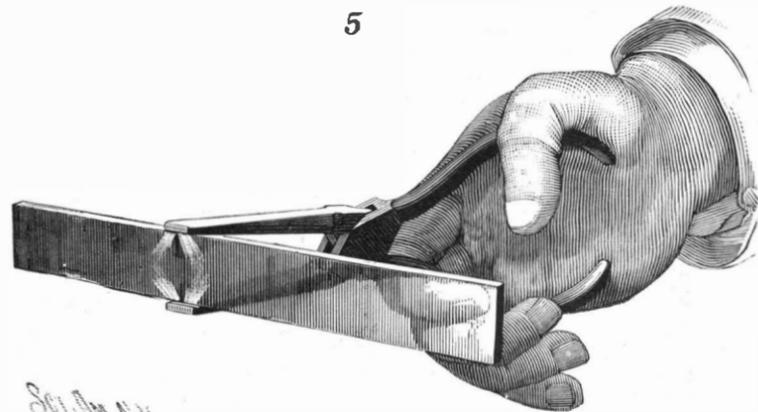


GLASS STRAINED BY PRESSURE.

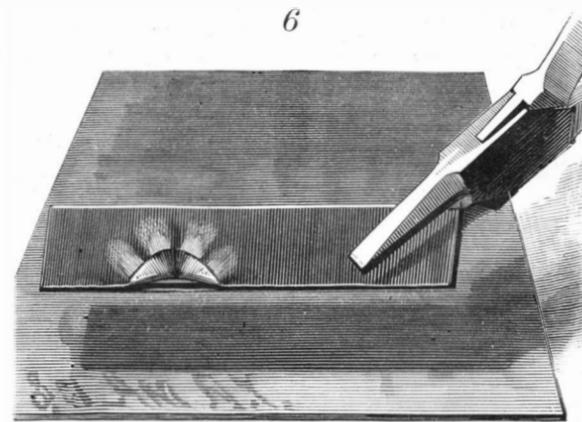

GLASS STRAINED BY HEAT.

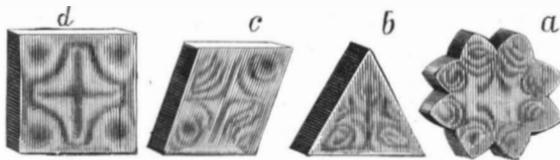

ANALYSIS BY BUNDLE OF GLASS PLATES AND VERRE TREMPÉ.

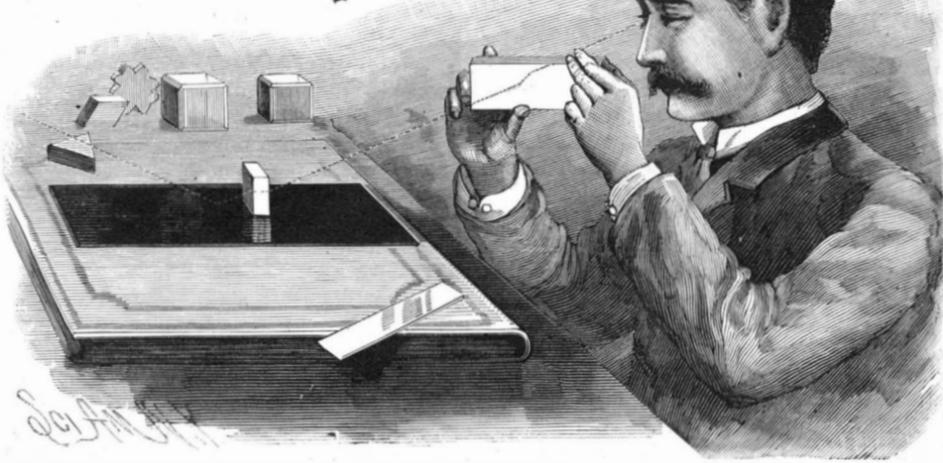

By turning the analyzing plate on the axis of the light beam, some curious effects may be observed. When the plates are at right angles with each other, the polarized beam will be nearly quenched,\* and when they are parallel with each other the reflection of the sky will be quite bright.

The employment of a blackened glass reflector for an analyzer is attended with some difficulty, on account of the necessity of changing the position of the eye for each new position of the analyzer. A bundle of six or eight plates of ordinary glass is more convenient, but not quite as efficient. These plates will be used as shown in Fig. 2, the light passing through them to the eye instead of being reflected. The plates may be turned at any angle without changing the position of the eye.

(Continued on page 6.)

\* With black glass reflectors employed as polarizer and analyzer, the extinction of the light is not quite complete, even when they are arranged accurately at the polarizing angle. See paper on "Polarized Light" in SUPPLEMENT 538.

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN.

A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, postage included. \$3 00
One copy, six months, postage included. 1 50

Clubs.—One extra copy of THE SCIENTIFIC AMERICAN will be supplied gratis for every club of five subscribers at \$3.00 each; additional copies at same proportionate rate. Postage prepaid.
Remit by postal or express money order. Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, \$5.00 a year, postage paid, to subscribers. Single copies, 10 cents. Sold by all newsdealers throughout the country.

Combined Rates.—THE SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, postage free, on receipt of seven dollars. Both papers to one address or different addresses as desired.
The safest way to remit is by draft, postal order, express money order, or registered letter. Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

Scientific American Export Edition.

The SCIENTIFIC AMERICAN Export Edition is a large and splendid periodical, issued once a month. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1) Most of the plates and pages of the four preceding weekly issues of the SCIENTIFIC AMERICAN, with its splendid engravings and valuable information; (2) Commercial, trade, and manufacturing announcements of leading houses. Terms for Export Edition, \$5.00 a year, sent prepaid to any part of the world. Single copies, 50 cents. Manufacturers and others who desire to secure foreign trade may have large and handsomely displayed announcements published in this edition at a very moderate cost.

The SCIENTIFIC AMERICAN Export Edition has a large guaranteed circulation in all commercial places throughout the world. Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

NEW YORK, SATURDAY, JULY 3, 1886.

Contents.

(Illustrated articles are marked with an asterisk.)

Table listing various articles such as 'Air, compressed, for life-boats', 'Books and publications, new', 'Brass, to clean', etc., with corresponding page numbers.

TABLE OF CONTENTS OF SCIENTIFIC AMERICAN SUPPLEMENT No. 548.

For the Week Ending July 3, 1886.

Price 10 cents. For sale by all newsdealers.

Table listing contents of the supplement with page numbers, including sections like 'I. ARCHEOLOGY', 'II. CLIMATOLOGY', 'III. ELECTRICITY', etc.

THE ILLUMINATING GAS INDUSTRY.

To one who has been familiar with the gas industry of this country for the last twelve years, the changes which have taken place in it are very remarkable. They have affected not only the manufacturing processes, but the business standing. While the technical part has advanced, the business has changed from one of the most conservative industries to one of competition. Twelve years ago, almost all the gas used in the world was made from bituminous coal. From 9,300 to 9,600 cubic feet per ton of 2,240 pounds was considered good practice. From retorts about twenty inches in width, a daily yield varying from 5,500 to 6,000 feet was looked for. At about that period, naphtha gas began to occupy some attention, and a series of many experiments was inaugurated, and even to-day that series continues. Every few months the subject would come up, and the proposal to put in naphtha works would be received by the companies. As a rule, gas engineers were violently opposed to any departure from the old process with which they had so long a familiarity, and any attempts to introduce naphtha gas were resisted by them most strongly.

In New York city a break was made by the Municipal Gas Co. Under Tessie du Motay's process they began making water gas carbureted with naphtha. After many and very expensive experiments, processes, and failures, they began to supply a large number of consumers, and naphtha gas in New York was a fixed fact. The Mutual and Metropolitan companies also began to use the same substance, and naphtha was consumed in enormous quantities. The old New York Gas Light Co. adopted the Tessie du Motay process, and while allowing their coal gas furnaces to stand, abandoned their use. This company was always considered one of the most conservative, and their adoption of the new process told much in its favor.

Two things have made water gas a success in this country. One is the cheapness of naphtha. Owing to the immense development of the petroleum industry, naphtha was becoming a drug on the market, and the oil companies are glad to dispose of it at a nominal price. The other factor is anthracite coal. This fuel is peculiarly suited for the water gas process. Other coals can be used, but cheap naphtha is almost a sine qua non. Everything depends on a supply at low prices. A rise of three or four cents per gallon would be a very serious matter. But for the present, naphtha, it may be assumed, is not about to double in price.

Coal gas engineers were stirred up by this rivalry, and tried to improve their process. Retorts of larger size were used, sometimes as much as 36 inches wide. For many years the idea had prevailed that coal should be distilled at a low red heat. This theory was abandoned, and every effort was made to get as high a heat as possible consistent with the preservation of the retorts. New furnaces were invented, of the regenerative or gas burning type. Siemens' furnace was used extensively on the continent of Europe, but in this country simpler modifications of it were more popular. By these means the yield of gas per ton of coal was brought up to 12,000 cubic feet, and the yield per retort was doubled. This indicates a remarkable revolution, due to the inventors' work of the past fifteen years. To realize what the work has been, the Patent Office Gazette should be consulted, and the number of patents in gas should be noted. The number is very great, the class is one of the most important and largest, and the work is still in progress. The lesson incidentally disclosed is of practical interest. By the labor of patentees, the production of gas at a low price has been made possible, and the consumers of New York alone are saved five millions of dollars per annum. It is a good illustration of the policy of protecting inventors.

This competition with water gas has permanently cheapened coal gas, and the reduction in cost has been favored by the low price of coal. Naphtha is still supplied in limitless quantities, while natural gas has usurped the field throughout the oil regions. How long the petroleum gas industries will last is uncertain. Professor Leslie has announced his belief that sooner or later the decline will come. It is hard to believe that gas can continue to pour out of the earth at many atmospheres of pressure for all time. But the work has been done, gas has been cheapened, and will never again cost as much to make as it has in the past. Even if petroleum should become scarce, the coal gas works are in better condition than ever, owing to the stimulus of competition and invention.

In this city, after a fierce struggle for supremacy, the principal companies formed a pool, and so raised the price of gas. The next move was a permanent consolidation, which brought together five of the old competitors. But as opposition still existed, the price was kept reasonably low. Within a few weeks, the legislature reduced the price still lower. A few days ago a new company applied for a charter, with a still lower limit of price. On the 22d of the present month, the Attorney-General is to consider the propriety of instituting proceedings for the annulment of the consolidation. The legislative lowering of price means a reduction in receipts for this city of nearly three millions of dollars per annum.

The contrast between the present time and a period ten or twelve years back is very great. Then, each company in New York had its own district, with only one general competitor. All through the country each company possessed a substantial monopoly. Now, the struggle so familiar here extends everywhere. The smaller cities have opposition companies, and both coal gas and water gas are made in many of them.

It seems at present as if enough had been done by the legislature. It has forced gas down to a barely remunerative price. It is now sold at a rate at which none can complain. If the breaking up of the consolidated company is executed, it is doubtful if any change in price will be brought about. The experience of pooling that extended over several years showed the efficacy of such a method of dealing with the subject, and, in the event of the disbanding of the consolidated gas company, would probably be again resorted to.

PHOTOGRAPHIC NOTES.

Potash and Soda Developers.—Before the Society of Amateur Photographers in this city, Mr. H. J. Newton stated that the following formula had yielded him excellent negatives. Each solid ounce contains 480 grains:

Table for No. 1 developer: Water 32 ozs., Carbonate of soda (crystals) 3, Carbonate of potash 3.

Table for No. 2 developer: Water 32 ozs., Sulphite of soda (crystals) 3.

One ounce of developer is prepared as follows:

Table showing drachm and grain measurements for developer preparation.

In case a dozen 6 1/2 x 8 1/2 plates are to be developed, 10 ounces of the developer can be mixed at a time, which will keep good for a day or two. One plate after the other can then be developed with great uniformity in the same solution. If a plate is underexposed, from 3 to 6 drachms of No. 1 should be added. More intensity is gained by the addition of pyro. Overexposure is remedied by the use of a very small quantity of No. 1.

Ripley's Soda Developer.—A formula which produces clear, brilliant negatives has recently been devised by Mr. Geo. H. Ripley, of Brooklyn, N. Y., also a member of the N. Y. Amateur Photographer's Society, and is prepared as follows:

Table for Ripley's No. 1 developer: Water (distilled) 20 fl. ozs., Sulphite of soda (crystals) 5 ozs.

Dissolve, filter, and add slowly enough sulphuric or nitric acid to make solution slightly acid. Test with blue litmus paper.

Table for Ripley's No. 2 developer: Pyrogallol acid 1 oz., Distilled water, to make the whole measure 30 fl. ozs.

Table for Ripley's No. 2 developer: Water 20 fl. ozs., Carbonate of soda (crystals) 2 ozs., Water, to make the whole measure 30 fl. ozs.

Weights given are based upon 480 grains to the ounce.

To develop a normally exposed 5x8 plate, take 1 oz. each of No. 1 and No. 2. The developer has the property of remaining remarkably clear, and may be used repeatedly, if properly stored in a stoppered bottle. The directions concerning the manipulation of the developer for obtaining different effects and counterbalancing errors in exposure are as follows:

If the plate is underexposed, or should show too great contrasts, transfer, without washing, to another tray containing solution No. 2. When the detail is well started, return the plate to and finish in the mixed developer.

If the plate is found to be overexposed, add to the mixed developer a few drops of the following solution:

Table for overexposure solution: Water 1 oz., Bromide of ammonium 50 grs.

To obtain soft effects, the quantity of No. 1 should be reduced. For use upon slower plates, such as are employed in the making of transparencies, a special solution is prepared as follows:

Table for soft effects solution: Sulphite of soda (crystals) 3 ozs., Citric acid 60 grs., Bromide of ammonium 30 grs., Water 28 1/2 ozs.

The developer is formed as follows:

Table for developer formation: No. 1 1/2 oz., No. 2 1/2 oz., Sulphite and citric acid solution 1/2 oz.

The Cause of Pneumonia.

Referring to our recent editorial on ozone and pneumonia, a subscriber suggests that one cause of the prevalence of the disease is to be found in the almost universal custom of keeping houses, stores, and factories at such a high temperature that the change experienced on passing to the cold atmosphere outdoors is more severe than delicate persons can subject themselves to without danger. Overheating and the want of sufficient ventilation are undoubtedly responsible for much sickness.

COMPRESSED AIR FOR LIFE BOATS.

To the Editor of the Scientific American:

In your paper of June 5, you print an article from the *Engineer*, on the means of forcing life boats out through the heavy surf and the rough water which are the necessary concomitants of the very circumstances which make their services of vital importance. The difficulties to be overcome are very forcibly and very correctly set forth, and the writer shows conclusively that the use of steam as a driving power for life boats is not within the range of possibility. The fire could not be maintained, nor could a boiler of any form, even if hung on gimbals, do its work. The violent shocks, to say nothing of the topsy-turvy commotions which the boat is constantly receiving, preclude absolutely the conjoint presence of steam and boiling water in the same reservoir.

If a life boat is to be forced out through the surf in any other way than by means of oars, it must clearly be by some power different from steam. And my present object is to show that such a power we have ready to our hand. It is now coming more and more into use, and for this special service is most admirably adapted; it is *compressed air*. Among several articles written for you by me in 1883, hoping to draw attention to the "Storage of Wind Power," was one, in your paper of Dec. 8, relating to its application to small motors. The facts, and the inferences from them, there stated bring us very appositely to the consideration of this matter of the life boats. The motor demanded must be: 1. Compact. 2. Unaffected by position or by shocks. 3. Always ready. 4. Able to supply the full power of a boat's crew and more, for often the strength of the crew is insufficient. 5. Sure in its action, and without risk of failure. 6. Involving as little weight as possible. Every one of these points is perfectly covered by the use of compressed air, as we shall see.

Nos. 1, 2, and 3 we need not consider, for they are manifest. Let us look to the requisite provision for No. 4. I propose to furnish the equivalent of twelve men, though no life boat carries such a crew on our coast. Such an amount of power, equal to two nominal horse power, will never be needed for any continued length of time. It is barely, in driving the boat out through the breakers, that it may be required, and for this a very few minutes must always suffice. After this, her crew are equal to her demand. And as the services of a life boat, in case of wreck, are limited to a brief period of time, we may safely calculate that the equivalent of one horse power for four hours is all that we need to provide and keep in store, and we can base our calculations on this amount.

Taking the ordinary tables, and assuming that the pressure on starting is 3,000 pounds, we find that reservoirs holding in the aggregate six square feet will give us all we need, with a surplus. After a service of four hours, we shall have in store a pressure of about 1,000 pounds. This is on the reckoning that we turn on as much as four horse power if required for sudden and brief strain. Thirty-one feet of six inch pipe will afford us the space indicated, and, if made of good steel, need not weigh over 300 pounds, say the weight of two men. But we have saved double that amount of load for the boat, for we have diminished the number of her crew. The services of the crew of a life boat are chiefly to manage the craft and take her to and from the wreck. Not more than two men commonly, and sometimes only one, can give their attention to the life saving work, all their skill and strength being otherwise demanded. And as we have the power for propulsion independently supplied, the boat need carry men only in proportion.

Another very important point is this: In shipping the terrible seas which so often come on board in the breakers, the men are caught by them at the greatest disadvantage possible. At the very moment when the crashing sea comes down on their heads and backs,

each man's utmost strength must be given to his oar, and he is braced as solidly as the timbers of the boat, and receives the heavy blow without the slightest chance to shield himself. If, on the contrary, we are driving the boat as has been here proposed, the men can be shielded very greatly, and many bad injuries avoided.

As to the mode of applying the power secured in the use of compressed air, opinions may be various, as was clearly shown in the article mentioned, where some of the difficulties are well stated. But with the power supplied we certainly can find the means of using it. My own preference is decidedly for the method recommended by me in your paper of Jan. 5, 1884, that is, direct pneumatic propulsion. It needs perhaps a large amount of experimental work, but I fully believe that for such service as this of the life boat it affords the most efficient and most economical method available.

Of the method of compressing the air and holding it ready for instant service, I say nothing here. In the articles to which reference has been made, I expressed my ideas in brief on that point.

Iron Dissolved by Sugar.

MM. Klein and A. Berg have been studying the

NIGHT SKY—JUNE AND JULY.

BY RICHARD A. PROCTOR.

The Great Bear (*Ursa Major*) is in the mid-heavens toward the northwest, the Pointers not far from the horizontal position. They direct us to the Pole Star ( $\alpha$  of the Little Bear, *Ursa Minor*). The line from this star to the Guardians of the Pole,  $\beta$  and  $\gamma$ , is in about the position of the minute hand of a clock two minutes before an hour. The Dragon (*Draco*) curls over the Little Bear, curving upward on the east, to where its head, high up in the northeast, is marked by the gleaming eyes,  $\beta$  and  $\gamma$ . Under the Little Bear, the Camelopard has at last come upright.

Low down in the west the Lion (*Leo*) is setting. The point of the "Sickle in the Lion" is turned to the horizon; the handle (marked by  $\alpha$  and  $\eta$ ) is nearly horizontal. Above the Lion's tail is Berenice's Hair (*Coma Berenices*); and between that and the Great Bear's tail our chart shows a solitary star of the Hunting Dogs (*Canes Venatici*). The Crow (*Corvus*) is low down in the southwest, the Cup (*Crater*) beside it, partly set, on the right. Above is *Virgo*, the Virgin. Still higher in the southwest—in fact, with head close to the point overhead—is the Herdsman (*Bootes*), the Crown (*Corona Borealis*) near his southern shoulder marking what was once the Herdsman's uplifted arm.


Low down between the south and southwest we find the head and shoulders of the Centaur (*Centaurus*), who holds the Wolf (*Lupus*) due south. Above the Wolf are the Scales (*Libra*), and above these the Serpent (*Serpens*), his head, in the south, stretching toward the Crown. In the mid-sky, toward the southeast, we find the Serpent Bearer (*Ophiuchus*—one star of the Serpent lies east of him). Below the Serpent Bearer we find the Scorpion (*Scorpio*), now fully risen, and showing truly scorpionic form. Beside the Scorpion is the Archer (*Sagittarius*), low down in the southeast. To his left we see, low down, two stars marking the head of the Sea Goat (*Capricornus*), and one belonging to the Water Bearer (*Aquarius*). Above the Sea Goat flies the Eagle (*Aquila*), with the bright star Altair; and above, near the point overhead, is the kneeling Hercules. Due east, we see part of the Winged Horse (*Pegasus*); above that, the little Dolphin (*Delphinus*), and higher, the Swan (*Cygnus*) and the Lyre (*Iyra*), with the beautiful bluish-white star Vega.

Lastly, low down, between north and northeast, we find the Seated Lady (*Cassiopeia*); and above, somewhat eastwardly, the inconspicuous constellation *Cepheus*, Cassiopeia's royal husband.

The Polarity of Tadpoles.

The following, says the *Centralblatt für Elektrotechnik*, is reported about an interesting experiment of the physiologist Prof. L. Herman. In a flat bowl filled with water, in which a number of 14 days' old froglarvæ (of *Rana temporaria*) were disporting themselves, were sunk along the narrow side, ready for an experiment, thick zinc wires connected with a battery of 20 little zinc carbon elements. When the current was made, the whole of the little animals fell into a wriggling motion, which soon ceased. But all the larvæ without exception had taken up one position, in which the head was turned to the anode and the tail to the cathode. The animals remained in this position till the current was again broken, when they again fell into the wriggling motion, but now less violently. Repeated experiments proved that the living animals showed a decided polarity, placing themselves along the stream lines of a current with their heads all in one direction, this direction being reversed when the current was reversed. An explanation of this interesting phenomenon has not hitherto been given.

ALUM gives excellent results when it has been found desirable to clarify muddy or turbid waters.

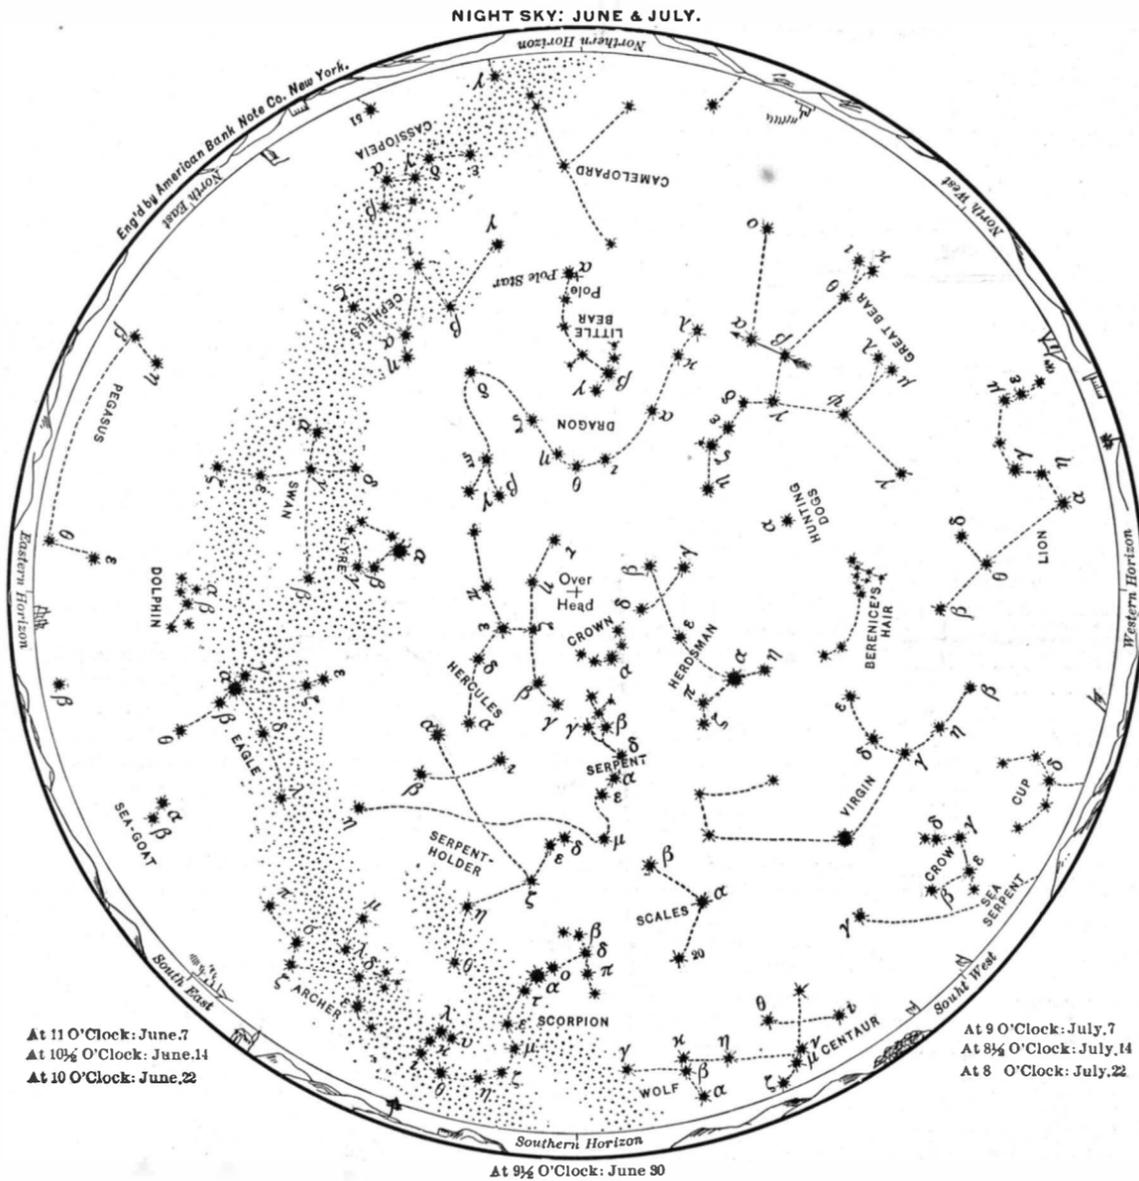


In the map, stars of the first magnitude are eight-pointed; second magnitude, six-pointed; third magnitude, five-pointed; fourth magnitude (a few), four-pointed; fifth magnitude (very few), three-pointed, counting the points only as shown in the solid outline, without the intermediate lines signifying star rays.

action of sugars on the corrosion of boilers, and find that sugar in water has an acid reaction on iron, which dissolves it, with a disengagement of hydrogen. The quantity of iron dissolved increases with the proportion of sugar in the water. The salt of iron formed is the acetate. A neutral decoction of malt also corrodes iron, with disengagement of hydrogen; but glycerine and mannite are without action on the metal. These results are worthy of note in sugar refineries and places where sugar sometimes finds its way into the boilers by means of the water supplied. The experimenters in question also find that zinc is strongly attacked by sugar; copper, tin, lead, and aluminum are not attacked.

THERE are reasons for believing, says the *North-western Lumberman*, that in the making of stock sizes of sash, doors, and blinds, in the factories of the Northwest, white pine will not much longer be the only material used. Poplar is commonly thought of as the most available substitute, and so it probably will be as long as it remains at anything like its present price, but there are other woods which may receive favor. One prominent Wisconsin manufacturer is now making doors of basswood, treating them to a priming coat of paint and sending them out to his regular customers. They are said to give good satisfaction in every respect, and particularly in point of price.

**MUSIC HOLDER.**

This music holder is provided with hooked arms for attaching it to the music rack. The upper parts of the arms slide freely in the lower parts, so that they can be drawn out or shoved in to fit the rack to which the holder is to be applied. Between the end blocks of the base is journaled a rod provided with fingers, which are pressed against the leaves of the book or sheet of music by the tension of a coiled spring. In the center of the rod is a thumbpiece, by which the rod may be turned back, so that the fingers will permit

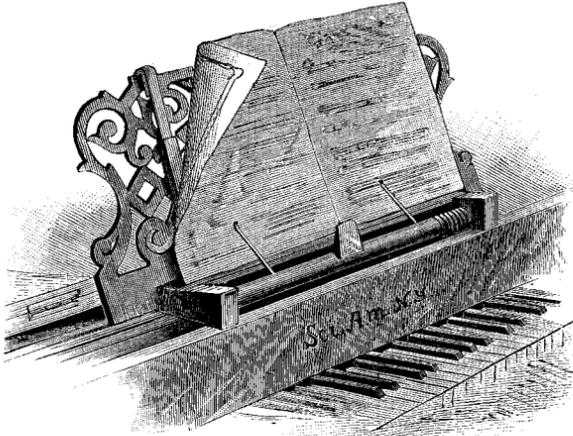**SMITH'S MUSIC HOLDER.**

the leaves to be turned. When not in use, the arms are folded along the base, to enable the holder to be put away in small compass. Constructed in this manner, the holder is cheap and practical, and can be applied to any piano.

This invention has been patented by Mr. David E. Smith, of Mount Kisco, N. Y.


**Destruction of Moss in Greensward.**

In humid soils, moss develops frequently in grass which is not very old, and completely smothers it. *La Revue Horticole* proposes the following method to get rid of this invading vegetation.

In the month of July, when it is very dry, have the lawn cut at times with a sickle, or with a lawn mower—grass, moss, and everything close to the ground. The sun's rays will in a few days destroy the roots of the mosses, which thrive at the top of the earth. The greensward will suffer very little, but it will be immediately free of all parasitic vegetation. If the necessary care be given, that is, by copious waterings, in a very short time it will become green and thicker than ever. It is not to be forgotten that, in sowing lawns, if powdered lime be cast, the mosses will soon become destroyed.

**LIQUID EMPTIER.**

The short arm of a siphon secured in one side of the can, as shown in the right hand figure, extends nearly to the bottom, while the long arm extends through the side to receive a rubber tube. A short air tube is inserted in the side of the can, near the top. To fill the can, the side opposite the siphon is placed upon a support, as shown in the left hand figure, when the liquid is poured in through the air tube, the air from the can escaping through the siphon. When filled, both tubes are capped and sealed. To empty the can, a slight air pressure is created by blowing through the

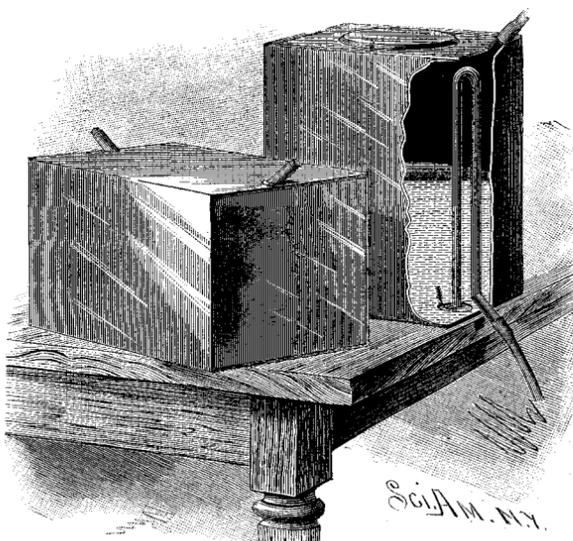**GASCA'S LIQUID EMPTIER.**

air tube, when the liquid fills the siphon, which continues to work as long as the liquid is supplied or until a partial vacuum is formed in the can by withdrawing part of the air through the air tube. To insure the entire removal of the liquid, the inner end of the siphon is inserted in a cavity in the bottom.


This invention, has been patented by Mr. Jesus Gasca, of Guanajuato, Mexico.

**A New Electrotyping Solution.**

Dr. Gore, F.R.S., the well known authority on electro-deposition, has discovered that an aqueous solution of asparagine is a good medium for electrolytic baths. The solution he used was not quite saturated, and consisted of about 0.88 gramme of crystals of asparagine dissolved in 18 cubic centimeters of distilled water. It was feebly acid to the test paper, and was employed at a temperature of about 70 degrees Cent. Some of the liquid was more or less saturated with different metallic oxides, and the resulting baths electrolyzed by currents from one to six cells of zinc and platinum in dilute sulphuric acid. Good deposits of cadmium were thus obtained, 0.23 gramme of hydrate oxide of cadmium dissolved in 20 cubic centimeters of the solution, using an anode of cadmium and a cathode of copper. Zinc was deposited from 0.28 gramme of zinc oxide in 23 cubic centimeters of solution. Magnesium in a film was also deposited from calcined magnesia with magnesium and copper electrodes; copper was obtained from cupric oxide with copper and platinum electrodes; mercury from red mercurous oxide with platinum electrodes; and silver from oxide of silver with a silver anode and platinum cathode. In the latter case the deposit was good, the bath consisting of 0.33 gramme of silver oxide in 20 cubic centimeters of asparagine solution.

**IMPROVED SAD IRON.**

This iron is in fact a miniature stove with polished surface, and is used in the same manner and is as convenient as a common flat iron. The heat can be regulated by the dampers at the heel of the iron; when using the iron, these dampers, which also serve as doors through which to introduce the fuel (charcoal), are wide open, and by partly or entirely closing them the heat can be reduced should the iron get too hot. Upon the under side of the handle, which is detachable, is a curved fluting iron corresponding with a fluted piece fixed to the side of the main iron, as shown in the engraving. It will be seen that this simple construction forms a self-heating, fluting, polishing, and smoothing iron.

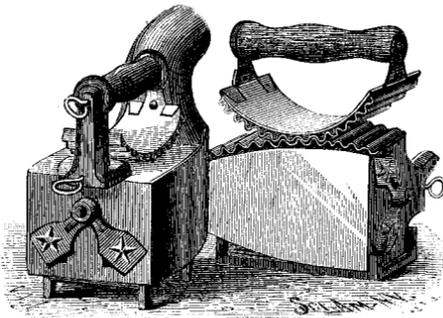**THE MULTUM-IN-PARVO IRON.**

This invention has been patented by Mr. H. S. Pease, of Peoria, Ill.

**The Railroads of the World.**

The *Archiv für Eisenbahnwesen* gives statistics of the railroads of the world, prepared for the most part from official sources, making the aggregate length, at the end of 1884, 290,750 miles, of which no less than 62,788 miles have been opened since 1879. Of this there were in the several grand divisions of the world:

	1884.	1880.	Increase.	P. c.
Europe.....	117,604	104,606	13,088	12.5
Asia.....	12,757	9,905	2,852	28.8
Africa.....	4,075	2,842	1,233	43.4
America.....	148,738	105,766	42,972	40.6
Australia.....	7,480	4,344	2,642	54.5


Of the 290,750 miles of railroad in the world, no less than 174,016, or 60 per cent, are in English speaking countries. The countries which have the greatest mileage in proportion to population, or the smallest number of inhabitants per mile, are Australia (364 people per mile), the United States (460), and Canada (486). Even the Argentine Republic has a smaller population per mile than any European country, namely, 1,000; while in Europe, Sweden, which has fewest, has 1,113; Great Britain and Ireland, 1,870; Germany, 1,983; France, 1,943; Belgium, 2,106; Austria-Hungary, 2,786.

The cost of railroads, as is well known, has been greatest in Great Britain, being there \$205,842 per mile of roads; for the Belgian state railroads it is \$123,986; for the French railroads, \$124,642; for the German state railroads, \$105,204; for the German private roads, \$71,877; for the Austro-Hungarian roads, \$104,420. The cheapest system of Europe is the state railroads of Finland, \$30,102; the other Russian railroads stand at \$82,244, against \$63,250 per mile for the railroads of the United States.

The whole cost of the railroads of the world has been more than \$24,000,000,000, which, however, is only about \$24 per inhabitant. In this country the expenditure has been about \$133 per inhabitant; in Great Britain, \$107; in Germany, \$47; in France, \$57; in Austria-Hungary, \$33; in Italy, \$19; in Belgium, \$41; in Sweden, \$25; in Spain, \$29; in Russia, \$14; in Canada, \$89.

**SCRAPING KNIFE FOR PAINTERS.**

Attached to the scraper is a bag of canvas or other fabric held in an elastic frame composed of spring bows joined by cross pieces and rods that form the upper side pieces of the bag. The rods are made fast to the rear cross piece, but pass loosely through holes made near the ends of the front cross piece, through which they slide when the receptacle is partly closed, as shown in the engraving. The front cross piece is made half tubular, and is slotted for the passage of screws, by which the knife and bag are fastened together. By loosening the screws, the knife can be shifted to stand near the center or near either end. By the use of this

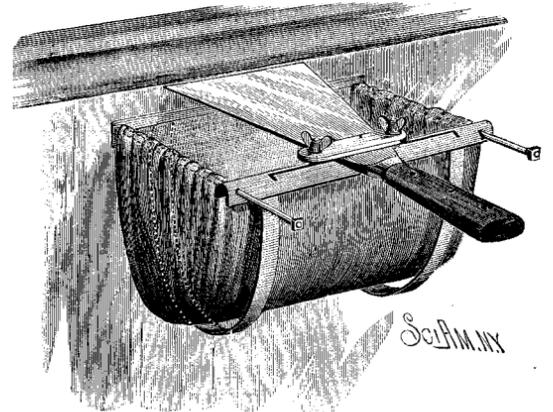**O'NEIL'S SCRAPING KNIFE FOR PAINTERS.**


device, which is the invention of Messrs. Charles and Richard O'Neil, of 219 East 46th Street, New York city, all debris removed from a wall in scraping it may be caught in the receptacle; and by shifting the knife its corners may be moved along a moulding or angle, and as the receptacle can be opened and closed to and from the knife, it will not interfere with the edge of the knife, being shoved with a forward thrust entirely up to a moulding or wall.

**Preparing Leaves to Show Starch Grains.**

The leaf, according to Prof. J. Sachs, must be bleached and made transparent in this way: The fresh leaf is placed in boiling water for ten minutes, then the chlorophyll is extracted with alcohol. This decolorizes the leaf without rupturing the starch cells. Treatment with iodine then makes the starch visible, and the greater or less intensity of the blue color is an apparent indication of the greater or less quantity of starch. Comparative experiments may be made by exposing part of a leaf to sunshine and protecting the other part. In the evening a leaf shows much more starch than in the morning.

**IMPROVED CAR SEAT.**

This seat is so made that it can be readily reversed without interfering with other seats in the car. The end frames consist of a single casting, shaped as clearly shown in the engraving. The rail is formed on a circular curve, and is grooved longitudinally on opposite sides, and received between grooved rollers supported by the end pieces of the seat frame or by one end piece and plates secured to the wall of the car. The cushions are supported by the curved rails and bars as shown, and act interchangeably as seat and back; the ends of the frame are symmetrical in form, so that they present the same appearance in both positions. The seat is held securely in either position by a spring bolt

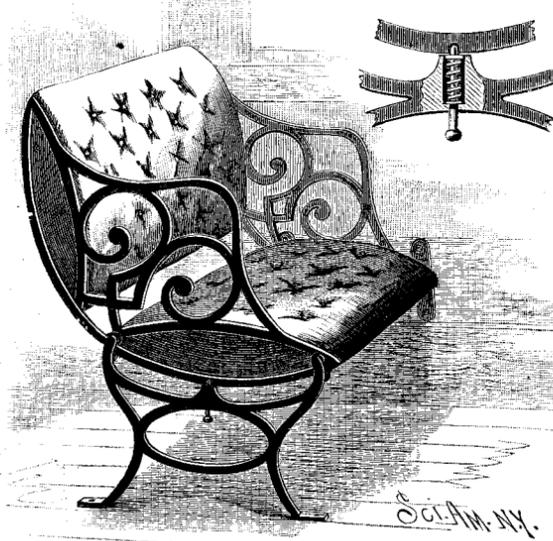
**WOODMANSEE'S IMPROVED CAR SEAT.**

passing through a socket in the upper cross bar of the end piece, as shown in the small cut, and entering one of the notches formed in the curved rail. To reverse the seat, the bolt is withdrawn, when the back can be pushed down in a circular path until it occupies a horizontal position and serves as the seat.

This invention has been patented by Mr. Charles H. Woodmansee, of Norton, Kansas.

**AUTOMATIC STOP FOR ENGINES.**

The engraving represents a device for automatically stopping pumping engines, particularly hot air engines used for raising water to tanks. To the engine is fitted an escape pipe provided with a valve, the stem of which has a lever. Connected to this lever is a cord or wire that passes over pulleys and down to a wheel on a shaft journaled in bearings attached to a casing. The shaft is provided with a spring for turning it for winding up the cord to open the valve or other device for stopping the engine. The shaft is turned for wind-

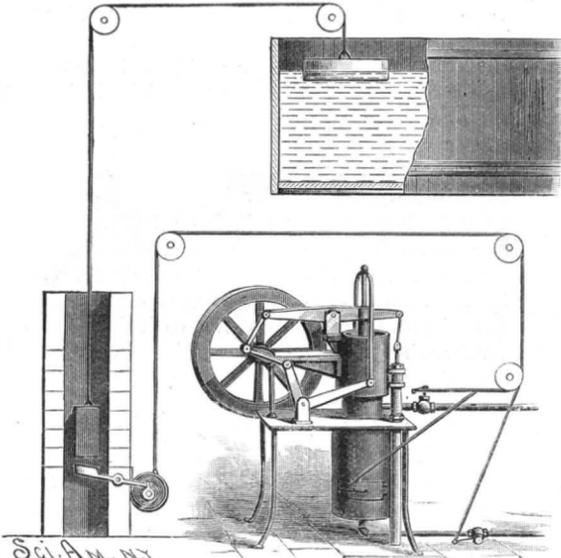


ROBERTS' AUTOMATIC STOP FOR ENGINES.

ing up the spring by a crank; it is locked by a pivoted trip lever engaging with a projection on the shaft. In the casing is a weight attached to a cord leading to a float in the tank. The cord is so arranged as to raise the weight when the float descends. As the tank fills the weight descends, trips the lever, when the spring turns the shaft to wind up the cord, thereby opening the valve and allowing the hot air to escape from the engine and cause it to stop. In some cases, instead of attaching the cord to the valve, it may be fastened to the furnace door, which will then be opened by the action of the spring. Where gas is used for fuel, the spring may be made to close the cock in the supply pipe. By thus automatically stopping the engine by the rising of the water in the tank, there is no danger of overflowing, and the engine requires no attention when in operation.

This invention has been patented by Mr. B. J. Roberts, of 126 East 19th Street, New York city.

**IMPROVED WOODWORKING MACHINE.**

This machine is designed for the cabinet shop, particularly where power and shop room are limited; it contains no complicated parts, and can with very few attachments and tools be successfully applied to almost every variety of woodwork. The cutter for forming dovetails is held in one end of a shaft mounted in bearings attached to the top of the frame. The cutter projects through an opening in a vertical guide plate so arranged that it can be adjusted out or in, to allow the cutter to make a shallower or deeper dovetail as may be desired. The feed table moves easily out and in, but has no lateral movement, and can be locked in the desired position. Upon the inner side of the middle part of the bracket supporting the feed table is formed a lug to which is secured a chain passing over a pulley and thence to a treadle hinged to the frame; by operating this treadle, the feed table can be raised to bring the work against the cutter. The timber to be dovetailed is placed with its edge upon the feed table and its side resting against the vertical guide plate, when it is moved forward until the tool has cut a recess to the desired depth. The timber is then drawn back, the feed table is lowered through a space equal to the distance between the dovetails, and is again shoved forward against the cutter. To form dovetail tongues, a number of pieces of timber are clamped together side by side, are placed edgewise upon the feed table, with their ends resting against the guide plate, and are moved laterally against the cutter, which forms a dovetailed groove across the ends. The table is then lowered and the opposite sides cut, and so on until the tongues have been finished on all sides.

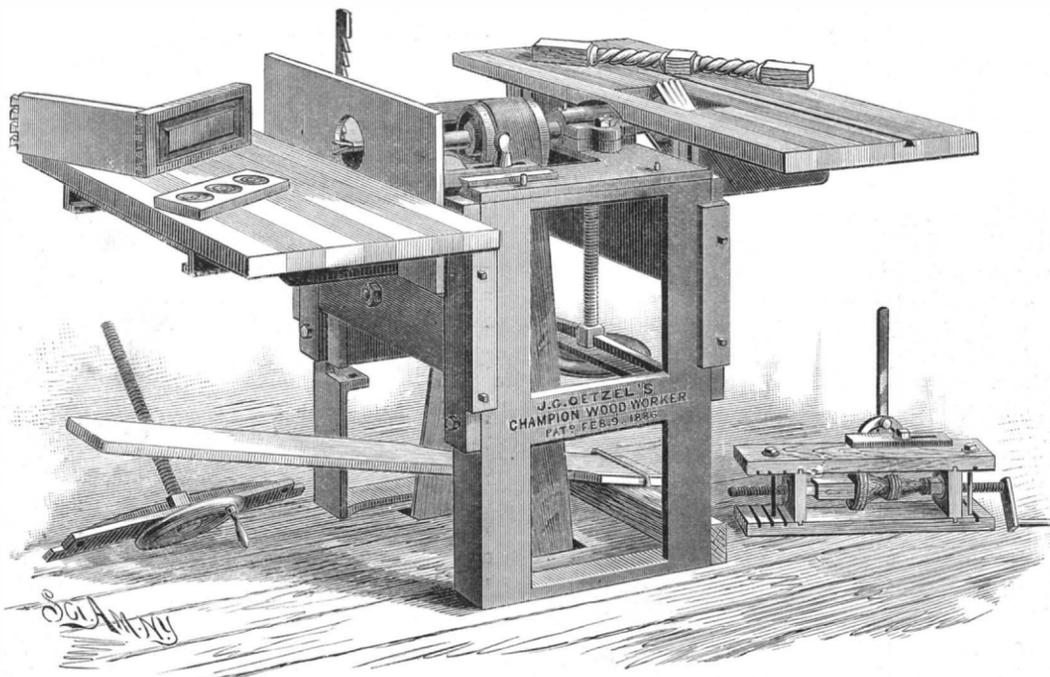

THE CHAMPION WOODWORKER.

To the other end of the shaft is attached an extension to serve as a mandrel to receive a saw or cutter head. This feed table can be raised or lowered, to allow the tool to cut to the desired depth, by means of a hand screw, which is swiveled to a cross bar secured to the frame. By turning the hand screw, the table can be adjusted to permit of the work being placed above or below the cutter or saw, as the character of the work may render most convenient. When used for cutting grooves, a gauge and guide cleat is attached to the table.

By using suitable tools and properly adjusting the parts, this machine can also be used as a boring machine with sliding table; as a double-headed moulding cutter for straight, circular, or other shapes; as a paneling and rosette cutting machine; and as a dado and routing machine. It is also effective for squaring the heads of turned front legs of sofas and chairs, and it can be easily adapted for cutting "rope or spiral" turning.

This machine is the invention of Mr. John G. Oetzel, whose address is care of Messrs. M. & H. Schrenkeisen, of 160 to 166 Monroe St., New York city.

**The Coupler Fiend.**


Since it became known that the Commissioners were interested in saving the lives and limbs of railroad employes by securing the application of automatic couplers, the inventors have forwarded them models of every conceivable kind of mechanical appliances for car coupling. Some of them are decidedly ingenious, others are cumbersome, while a few are constructed upon the principle that freight cars should be locked together as tightly as the jaws of a steel vise. Railroad men are agreed that there should be some play in couplings for freight cars, and they pass over models which do not recognize this principle. Some of the couplings are made to be operated by a lever projecting beyond the side of the car. Others seem to be constructed for operation solely from the tops of cars. One of the simplest of the collection now in the Railroad Commissioners' office was invented by a mechanic employed by the New York Central. Every inventor who forwards his model invariably accompanies it with the modest explanation that "this is the best thing ever yet invented."

"Probably a hundred models have been sent to the Commissioners, perhaps more," said Secretary Hudson. "Many of them are exceedingly ingenious. Some of them are so expensive that they are impracticable. I remember sitting here in the office one day when a chap came in, followed by five associates. Each of them had a bundle. The leader just cast one glance at me, and then without a word he undid his bundle, and commenced to lay a miniature railroad track all around the floor and into the Commissioners' private rooms. The fifth man produced a lot of cars, and the last man drew a locomotive out of his package. Then I began to get interested. The leader arranged the track so that it ran up and down heavy grades and around sharp curves. Then he lighted a match, touched it to the locomotive, and away went the miniature train at a great rate of speed. Then he purposely caused an accident to the train,

vention enormously costly, and of course impracticable. He thought he had fortune by the throat, and I could not convince him to the contrary. I yielded to his solicitations for letters of introduction to two practical railroad men, and away he went. I afterward received notice from these gentlemen that my life would be in danger if I ever sent any more inventors to them."—*Albany Corres. New York Times.*

**STEEL WIRE DOOR MAT.**

The accompanying engraving represents a door mat that is rapidly coming into favor, and is particularly adapted for railway and street car floors, steamboats, offices, stores, residences, etc. It is made of steel wire, with steel frame and steel braces, all perfectly galvanized. This gives it many decided advantages; it is serviceable, practically indestructible, is self-cleaning,

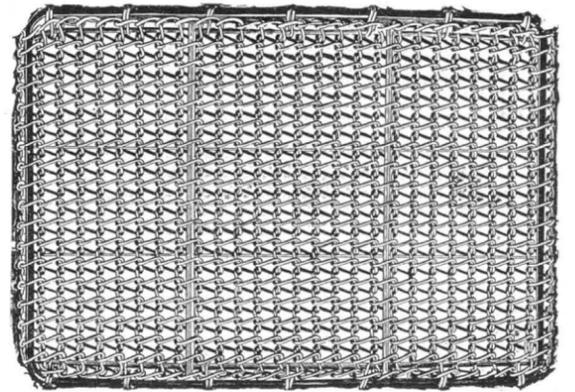

STEEL WIRE DOOR MAT.

requiring no shaking, and cheap. These mats are manufactured by the Hartman Steel Co. (Limited), of Beaver Falls, Pa., in six standard sizes, varying from 16 by 24 inches to 36 by 48 inches; special sizes and shapes are made when desired.

**Ancient Condition of Egypt.**

At the recent meeting of the Victoria Institute, Prof. Hull, F.R.S., Director of the Geological Survey of Ireland, delivered the address, in which he gave an account of the work, discoveries, and general results of the recent geological and geographical expedition to Arabia and Western Palestine, of which he had charge. Prof. Hull, having sketched the course taken by the scientific expedition (which to a considerable extent took the route ascribed to the Israelites), the physical features of the country, evidences of raised beaches, etc., showed that at one time an arm of the Mediterranean had occupied the valley of the Nile as far as the first cataract, the level of the land being 200 feet lower than at present (an opinion which had also been arrived at by another of the Institute's members, Sir W. Dawson), and that, at the time of the Exodus, the Red Sea ran up into the Bitter Lakes, and clearly must have formed a barrier to the travelers' progress at that time. He then alluded to the great changes of elevation in the land eastward of these lakes, mentioning that the waters of the Jordan valley once stood 1,300 feet above their present height. The various geological and geographical features of the country were so described as to make the address a condensed report of all that is now known of that part of the East.

**Solidified Oxygen.**

At the Royal Institution recently, Professor Dewar exhibited the method he employs for the production of solid oxygen. Last year the Professor gave a lecture on liquid air; but although he and other experimenters had made liquid oxygen in small quantity, yet no one had succeeded in getting oxygen into the solid condition. The successful device employed at the Royal Institution depends upon allowing liquid oxygen to expand into a partial vacuum, when the enormous absorption of heat which accompanies the expansion results in the production of the solid substance. Oxygen in this condition resembles snow in appearance, and has a temperature about 200 degrees Centigrade below the freezing point of water.

A supply of this material will enable chemists to approach the absolute zero of temperature and to investigate many interesting changes in the physical properties of bodies under the primordial condition of the temperature of space.


## SIMPLE EXPERIMENTS IN POLARIZED LIGHT.

(Continued from first page.)

The most perfect analyzer, however, is the Nicol prism.\* A very small one will answer perfectly for this class of experiments, and is not expensive. But to return to our experiments; when the analyzer and polarizer are crossed and the field is dark, if a few pieces of mica of various thicknesses and shapes are held between the analyzer and the black glass plate, and bowed and inclined at different angles, a great variety of tints will be observed, and if held in one position while the analyzer is turned, another effect will be noticed.

Among the objects which may be examined in this way are the paper weights, stoppers, and other thick, partly annealed pieces of glass, a piece of glass held edgewise in a hand vise or pair of pliers and put under compression, as shown in Fig. 5. A piece of glass held edgewise for a moment in a small gas or candle flame, and then placed in the polarized beam, shows the strain by a light figure, like that represented in Fig. 6, or it may assume other forms, according to circumstances. As the glass cools, the figure fades away.

Small glass squares and triangular and diamond-shaped plates, about three-quarter inch across, suspended by a fine wire in the flame of a Bunsen burner or alcohol lamp until their corners begin to fuse, and then cooled in air, become permanently strained, and exhibit symmetrical figures formed of dark and light

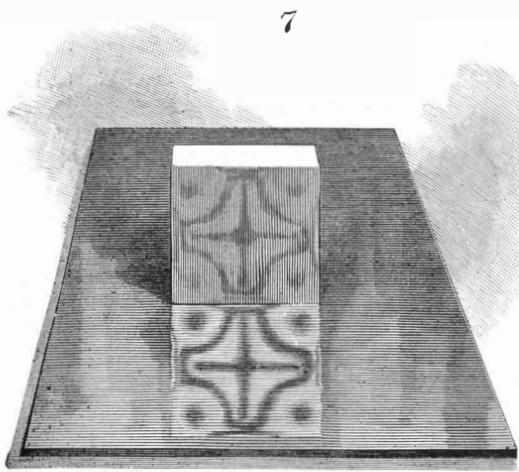

DOUBLE POLARIZATION WITH SINGLE GLASS PLATE.

spaces, but show little color on account of their thinness. By superposing several such plates, color effects may be seen.

The beautiful *verre trempe*, or strained glass blocks, a few examples of which are represented at *a, b, c, d*, in Fig. 2, are similar in character to what has just been described. They vary in thickness from one-fourth inch to one-half inch, and even thicker. They are expensive objects, but exceedingly beautiful and interesting.

In Fig. 3 is shown a method of polarizing and analyzing with a single bundle of plates. It is, in principle, a Norremberg doubler. The light strikes the under surface bundle of plates at the polarizing angle, and is reflected downward in a polarized state, passing through the object which rests upon the horizontal silvered mirror. It is then reflected back through the object, and passes through the bundle of plates to the eye of the observer; the plates, as before stated, serving to analyze the polarized beam.

A Norremberg doubler, which answers a good purpose, may be made by leaning a clear plate of glass upon the edge of a book, over a piece of ordinary looking glass, and employing a bundle of glass plates as an analyzer, as shown in Fig. 4. Here the polarization is effected by the single plate of glass, and the analyzation by the bundle of plates held in the fingers. Equipped with this instrument, the student of polarized light may proceed a long way with his investigations.

In this instrument the objects to be examined are laid upon the horizontal mirror, and the inclined plate is arranged with reference to the light so that it will reflect the broad light of the sky downward. The position of the single plate and bundle of plates may be varied to secure the best effects.

In Fig. 7 is shown an arrangement by which the object and the blackened glass both act simultaneously as polarizer and analyzer. By placing a specimen of *verre trempe* edgewise on the blackened glass, as shown in the engraving, the light, striking the strained glass at about the polarizing angle, is reflected from the back surface of the glass and partly polarized. The beam thus polarized is reflected downward obliquely, and at the same time depolarized by the strained body of the glass; it is reflected upward to the eye and analyzed by the blackened glass mirror, thus producing an image which is apparently below the surface of the mirror. The image seen in the *verre trempe* itself is produced by the reverse of what has just been described. The light is polarized and re-

flected by the black glass mirror, and passes through to the back surface of the *verre trempe*, which reflects it back through the body of the glass; the glass then acts as both object and analyzer.

When the polarizer, analyzer, and object are each movable, different effects will be produced by rotating any of them. As a means of exhibiting complementary colors, nothing can excel the polariscope, as the colors produced in the successive changes resulting from turning the analyzer or polarizer are exactly complementary to each other. Little has been said about theories. The writer's object is to interest the reader in polarized light sufficiently to induce him to study the literature of the subject.

## House Bill 4458.

The Patent Bar Association of Chicago have sent to Congress the following petition, which very ably sets forth the serious objections to the above bill, to which we have heretofore called the attention of our readers:

*Whereas*, It is the sense of the "Patent Bar Association," of Chicago, Ill., composed of patent lawyers representing varied and diverse interests dependent upon letters patents for inventions, that the "Townsend" bill (No. 4458), now pending in the House of Representatives, is unconstitutional, inherently and radically wrong in principle, and calculated, if it becomes a law, to work great hardship and injustice to meritorious inventors, in the following particulars, to wit:

*First*.—In that, by not excepting from the operation of the bill patents heretofore granted, it directly interferes with and takes away rights already vested under said patents.

*Second*.—In that it deprives inventors of the exclusive rights to their discoveries or inventions, contrary to the provisions of Section 8 of Article 1 of the Constitution of the United States.

*Third*.—In that its provisions are so vague and ambiguous that it will enormously multiply litigation, and will for several years render it impossible to determine what are the legal rights and remedies of the owners of letters patent.

*Fourth*.—In that it is "class" legislation as against the products of the brains of inventors, while the exclusive rights of authors are fully protected by the laws of Congress.

*Fifth*.—In that it takes away the jurisdiction of the Circuit and District Courts of the U. S., in suits for infringement of patents involving less than \$200, without designating any tribunal for the hearing and adjudicating thereof, thereby depriving patentees having small claims of any remedy, legal or equitable.

*Sixth*.—In that its provisions are a direct temptation and incitement to fraud as to knowledge or notice of the grant of letters patent for invention, and in permitting an infringing purchaser for use, whose wrong is begun innocently, to continue the same deliberately, after notice during the life of the patent; and,

*Seventh*.—In that it extends to infringing manufacturers, who are supposed to engage in business deliberately and with their eyes open, the same privileges and exemptions as are extended to innocent purchasers buying in open market; therefore, be it

*Resolved*, That this Association respectfully and earnestly petitions Congress not to pass said bill—H. R. 4458.

*Resolved*, That our Senators and Representatives in Congress are respectfully requested to oppose the passage of said bill. J. M. THACHER, *President*.  
E. S. EVARTS, *Secretary*.

## The Making of Rubber Stamps.

The wording of the desired rubber stamp having been correctly set up in ordinary type, the same is locked up and placed upon a level support. Around it is put an iron frame, which will determine the shape and size of the matrix.

By means of a soft brush, the type as well as all surrounding parts, that are to be covered by the plaster of Paris, are well oiled.

For the purpose of making the cast, finely ground fresh plaster of Paris is needed; if of long standing, the same will lose its desirable properties. This plaster of Paris, of which a sufficient quantity should at one time be mixed to the consistency of pap, using clear water, is poured over the frame containing the type in a thin layer, so as to barely cover it. With a stout brush the mixture is driven into all spaces and interstices, until all details are thoroughly covered. After this the remaining pap of plaster of Paris is added until the frame is filled to overflowing. The surface is smoothed down, after the plaster has settled somewhat, and in a short while the matrix in the frame may be removed from the type.

After this it becomes necessary to bake the matrix in an oven for a period of from four to six hours. When thoroughly baked, the matrix should be well brushed with a thin solution of shellac to impart a smooth surface, and at the same time greater strength.

The matrix, at this stage, represents a yellowish-white block, in which the lettering appears indented,

but in proper place. The indentation corresponds to the height of the letter upon the piece of type or the marks upon a cut, while the remaining parts should be perfectly smooth and free from holes. This matrix, obtained by a coating from the type or cut, will serve as the mould for the final rubber stamp.

Pieces of caoutchouc are cut to the required size and laid upon the matrix. If pressure is now exerted, the soft mass will adjust itself to fill all the spaces and reproduce the mould invertedly. Indentations become raised matter, and the whole will show as did primarily the type.

But as the caoutchouc has a tendency to return to its previous shape, it becomes necessary to apply the process called vulcanizing. The object is to impart hardness to the rubber, and to prevent its losing the form into which it has been pressed.

To accomplish this, the caoutchouc must be heated to a temperature of from 120 to 130 deg. C. As the substance is ordinarily softened by heat, it is necessary to take some means to prevent it from sticking to the mould. For the purpose soapstone will answer, and the mould, as well as the piece of caoutchouc, should be well brushed or dusted with this substance.

The duration of the heating varies with the thickness of the rubber sheet. As a general thing, from 20 to 30 minutes ought to be sufficient. It may be mentioned here that special apparatus has been constructed for pressing and vulcanizing. The proper vulcanization is of the greatest importance in determining the durability of the stamp.

All that remains to complete the stamps is the mounting of the rubber plate upon a suitable base or handle. This is best done either with zinc or with a solution of caoutchouc in benzine. The surface of the handle, as well as the back part of the stamps, having been covered with such a solution and well pressed together, after drying the entire stamp will be ready for use.—*Amer. Lith. and Printer.*

## Compensating Pendulums.

At a recent meeting of the Royal Astronomical Society, London, Dr. Leonard Waldo, of Yale College, described an escapement for clocks of precision, with which he had been making experiments. He said there are several obscure sources of error in the rate of clocks, which have not been properly investigated. It is ordinarily assumed that the pendulum swings in a plane; but this is never actually the case. There is always some deviation from the plane, as may be shown by fixing a reflector on to the pendulum rod, and observing a reflected light on the cross wires of a telescope as the pendulum swings. Then there is always some mobility about the support, which, if the pendulum is heavy, may be a serious cause of error. Then the coefficient of elasticity of the suspension spring is always changing with the temperature. I have found the best results with a very firm and specially built stone arch between two piers, like the piers of a transit instrument, from which to suspend the pendulum. I have had to discard the use of a glass rod and glass jar for mercury, on account of the difficulty of getting a straight uniform rod or an accurate cylinder to contain the mercury; and we have fallen back on the use of a steel jar and steel rod, which, though they are subject to greater expansion, can be accurately turned. I have had to reject altogether zinc and steel gridiron pendulums, on account of their tendency to warp. There is an uncertainty about such pendulums which is totally unexplained. I use a weight of from 45 to 60 pounds of mercury, properly freed from oxide, which is another source of change of rate. The escapement I have used is a modified form of the Denison gravity escapement, which does not want any great amount of power to drive it.

Mr. Buckney said: I should like to make a few remarks on what Dr. Waldo has said, for his experience does not agree with mine. First, as to the mercurial pendulum being better than the zinc and steel compensating pendulum. I much prefer the zinc and steel, especially for large pendulums, for a change of temperature does not act immediately; and with the mercurial pendulum, the rod takes up the new temperature, while only the outside of the mercurial jar is heated, and until the whole of the mercury in the jar is heated the clock will lose. I have made some experiments as to this, and found that a mercurial jar of 2 in. in diameter, which is the ordinary size used, when exposed to a change of temperature of 30°, takes a whole day to steady itself. A jar of 3 in. in diameter took between two and three days to compensate itself. I do not understand why; but the increase of temperature took about double the time to show its effect that the cooling did. With a zinc and steel pendulum the bob can be suspended from its center so as to eliminate all errors due to the expansion of the bob itself, so that the expansion of a large mass need not be considered.

Mr. Inwards: There seems to me to be another objection to the mercurial pendulum which has not been referred to—the mercury, being liquid, always flops about to a certain extent, which must be equivalent to so much friction.

\* For description see SUPPLEMENT 538.

## Correspondence.

**The Recent Fire at the Harrison Chemical Works.**

To the Editor of the Scientific American:

We notice in your issue of the 12th inst. an item to the effect that during the recent fire at our works a large amount of chemicals were released from the burning building, which entirely destroyed the fire hose, and also that the firemen's lives were constantly endangered because of the chemicals in the neighboring buildings. Kindly correct this erroneous statement.

The building burned, one of a group of buildings devoted to the manufacture of alum, contained nothing but sulphate of alumina, or alum, in solution or in bulk, in either case perfectly harmless. The nearest buildings were acid chambers, which were not injured sufficiently to release any acid, and even if these chambers had been destroyed, the acid could not have come in contact with the hose. The only hose destroyed during the fire was some 150 feet of our own, which was caught by the fire in an exposed position, and burned before it could be removed. The firemen were not exposed to any more danger than at any ordinary fire, as we do not manufacture, either in our alum works or in any of the rest of our factories, any explosive materials; and even had our chambers been destroyed or injured, none of the acid, or chemicals, as you call them, could have come in contact with the fire hose, owing to the peculiar construction of the buildings.

Mr. John R. Cantlin, Chief of the Philadelphia Fire Department, in a letter to us fully confirms our statement, and we beg you will correct your item.

HARRISON BROS. & CO.,  
C. LELAND HARRISON.

Philadelphia, June 17, 1886.

**How to Increase the Efficiency of Dynamo No. 161.**

To the Editor of the Scientific American:

I have just constructed for lecture purposes in this school a dynamo electric machine like that described in the SCIENTIFIC AMERICAN SUPPLEMENT, No. 161, and I have found it possible to increase its efficiency very much by a change in the manner of making the connections, which may be of interest to others who have the same machine.

I connect the brushes with the extremities of the wire passing round the field magnet, thus closing what may be called the inner circuit. I again connect the brushes for the outer circuit. This connection is very effective where the outer circuit has much resistance or is subject to interruption. The greater the resistance in the outer circuit, the stronger the field magnet becomes and the greater the electromotive force of the current. If the outer circuit, is broken, the field magnet, instead of losing its magnetism, becomes stronger, since its coils receive all the current.

Connected as I have described, the machine will decompose water or work a telegraph instrument at a very low speed; and at a high speed will easily raise to a red heat from eight to ten inches of platinum wire, No. 36. It will also run a small arc light or several small incandescent lamps.

When the resistance of the working circuit is very low, and only then, the connections are best made as described in SUPPLEMENT, No. 161.

Of course, I am well aware that this application of short circuits is well known to electricians, but doubtless many who have made and are using this little machine do not know of it. C. FESSENDEN.

P. S.—To change the circuit, as above, it is not necessary to make any change in the construction of the machine. Taking Fig. 3 of description in SUPPLEMENT, No. 161, join *n* and *v* by a straight stout wire, and take the current for outside work from *p* and *v* or from *p* and *n*. C. F.

High School, Napanee, Ontario, Can., June 21, 1886.

**Peculiarity of Indian Castings.\***

The importation of partly manufactured material is at present exercising considerable influence over many of the native arts of Oriental countries and India. The supply of machine made thread has doubled the village handlooms in some districts of Madras, and gold thread from Germany has enabled the brocade weavers to compete with the imitation brocades sent in from Europe. In some handicrafts, however, the supply of European material has produced a contrary effect. Iron and steel, bar and rod, have displaced an ancient industry, and sheet copper and brass have robbed the founder of half of his work. Formerly the only means of producing sheet metal was by hammering cast plates, an expensive method only resorted to when thin flat coverings were required for wooden or other objects. For very large vessels, where weight was required to be kept down and strength maintained, hammered sheet was used; but generally

the founder was employed, to save as much as possible the labor of forming the furnished castings, which required but little beating out, trimming, and brazing. In the case of a bowl or flat jar with a narrow mouth, the founder would prepare a cast not unlike in shape and thickness that of an ordinary flower pot saucer, from which, by constant hammering, the bulbous sides would be formed, projecting beyond the rim, which would remain of its first diameter and thickness. When finished, such a vessel would be nearly double the size of the first cast, and a remarkable example of the native knowledge of the composition of bronzes and annealing processes.

It is worthy of noting that the chief means of detecting modern from old Persian and Saracenic metal vessels is by examining the brazing joints, which in ancient vessels are rare. When not found, a close examination will show the vessel to be a thin casting, the ornamentation being by inlay or chasing and hammering, which, being done after the cast is made, gives the reverse side the appearance of chased sheet metal. So far as I could ascertain, there are three methods of casting practiced in India. The first by moulds in sand; the second, moulds in clay not unlike plasterers' piece moulds; the third, clay moulds formed on a wax model, the *cire perdue* of Europe. The first of these is well known in Europe, but the second is, I believe, now described for the first time.

In preparing the mould, impressions of the various parts of the pattern are taken in clay, and these pieces when nearly dry are, after trimming stuck neatly together, and kept in place by several layers of mud, in which some fiber is mixed. The mould when ready has but one vent, which, placed on the most convenient side, is carried up into a sort of bottle neck. If the object is small, several moulds are attached together, and the vents united by a single short neck of clay, to which a crucible, inclosed in an egg-shaped ball of clay, is attached. The size of this crucible depends upon the exact amount of metal required to fill the mould or moulds; and this quantity being known by experience, the founder places it inside before closing it up.

No provision is made for the escape of air from the mould when the metal is poured in. The mould and crucible (now in one piece) is allowed to dry; and after several coats of clay, tempered with fiber, have also been well baked on by the sun, the furnace is prepared. This is simply a circular chamber about 2 feet 6 inches in diameter, 2 feet in height, with a perforated hearth and no chimney. Half filled with charcoal, a good heat is obtained by the use of several sheepskin bellows from beneath. When ready, as many moulds as the furnace will hold are placed in it, the crucible end of each being embedded in the fire. A cover is placed over, and the fire kept up until upon examination the moulds are found to be red hot. They are then taken, one at a time, and replaced in a reverse position, the crucibles being now above. The metal flows down into a red hot mould, and penetrates the finest portions of the surface without suffering from air or chilling. The fire is allowed to gradually cool, and when the objects are broken out of their clay covering, the metal is soft and malleable.

The third manner of casting (that by the use of a wax pattern which is destroyed in the moulding) is well known, but in one particular case the process has been carried further than would be at first believed, and of this I will now attempt a description.

The object produced is an anklet, a flexible ring about 4 inches in diameter, made from an endless curb chain. Such curb chain trinkets are common in India, and are generally made from thick silver wire rings interlinked and soldered one by one. In this example the anklet is made of bronze, and consists of a complicated chain of 43 detailed links, the whole being cast by a single operation. The first part of the process is the preparation of a pattern in wax, a delicate work, each link having to pass through four others, and to bear three small knobs or rosettes. These are in two instances but ornaments; the third, however, serves as a channel for the metal to enter each ring. Then commences the most difficult part of the work, each ring having to be slightly separated, and this is effected by painting in a thin coat of fine clay until there is sufficient to form a partition. Other coats of clay are added until a thickness of about half an inch is attained, when a groove is cut round the upper side of the ring, and deepened until the row of knobs is bared. The wax is then melted out, and the mould attached to a crucible as before described. When cast, and the mould broken away, the chain comes out inflexible, being attached to a rod which runs round where the groove is cut. This is broken off, and the chain is complete.

The president of the society before which the paper was read, in proposing a vote of thanks to Mr. Clarke for taking so much trouble in obtaining the specimens exhibited, said that they were very extraordinary things, and the subject was well worth considering carefully. The mould and the crucible were fixed

together, as they could see. He knew that Mr. Clarke had had the opportunity of seeing a good many metallurgical processes as practiced in India, and he was very much struck by one point mentioned, namely, the very great use made in India of highly heated moulds, and which he considered was a subject deserving of considerable attention.

**Petroleum in Egypt.**

The recently discovered oil fields in the region of the Red Sea have been carefully examined by Mr. Daley, a Belgian engineer, and promise to be of considerable importance. The entire peninsula of Gimsah, where the oil has been found, is of volcanic structure, and devoid of the slightest trace of vegetation or fresh water. The first oil borings were made at a distance of 400 feet from the sea. At a depth of 156 feet, a copious flow of oil was obtained. It is estimated that 3,200 barrels were discharged in 24 hours, and the flow has since been maintained at the same rate. The petroleum is of a dark greenish color, and limpid. It is mixed with salt water, and discharges carbonic acid gas. By allowing it to stand for some time, the salt water settles to the bottom, and may be drawn off. The surrounding country is quite uninhabited, on account of the absence of drinking water and vegetation. All provisions are supplied from Suez. The climate, however, is healthful, and the otherwise intense heat is moderated by frequent winds.

The Egyptian Government is disposed to do everything necessary for the development of the new industry. Jetties are being constructed, so as to allow vessels to be loaded directly at the wells. It is probable that most of the crude oil will be taken to Cairo for refining.

**DECISIONS RELATING TO PATENTS.****U. S. Circuit Court.—Northern District of Illinois.**

OHIO STEEL BARB FENCE COMPANY v. WASHBURN & MOEN MANUFACTURING COMPANY *et al.*  
Gresham, J.

A court of equity will not specifically enforce a contract at the instance of one of the parties who has repeatedly broken it, even if the other party has been guilty of the first breach.

If one party to a contract expects to have it specifically enforced against the other, he must act steadily in good faith, by observing its terms, whether the other party violates his covenants or not.

When a party to a contract has not kept his covenants, but excuses himself on the ground that the other party was guilty of the first breach, whatever remedy there is is at law.

**U. S. Circuit Court.—District of Indiana.**

HUDNUT v. LAFAYETTE HOMINY MILLS *et al.*

**PATENT HOMINY MILLS.**

In a suit on reissued letters patent No. 10,057, of March 7, 1882, to Theodore Hudnut, it was shown that one of the alleged infringing machines was made in accordance with an earlier patent, and therefore held that such machine was not an infringement.

It is not competent for a patentee, by a reissue of his patent, procured after a delay of more than ten years, to so enlarge the scope of his invention as to cover devices patented in the mean while, which were not embraced in the original.

**Maryland Court of Appeals.**

SCHWARZENBACH v. ODORLESS EXCAVATING APPARATUS COMPANY.

Ritchie, J.

Money paid for a license to use a patented invention on representations made in good faith that the patent is valid cannot be recovered back, although the patent turns out to be void.

In such a case, the general principle applies that where a party with full knowledge, actual or imputed, of the facts, there being no duress, fraud, or extortion, voluntarily pays money upon a demand, though not enforceable against him, he cannot recover it back.

A licensee who has paid, or agreed to pay, an annuity in consideration of a license to use a patent privilege which he has had the benefit of, cannot recover back the money or avoid its payment, if not already paid, on the ground that the patent is void.

**A Fish Drying Machine Wanted.**

A Florida correspondent writes that a demand now exists among the water farms and fisheries on the Gulf coast for a convenient and inexpensive machine for drying fish so that they may be shipped to distant markets, in the same manner that the fruits of the South are now distributed in dried form over large areas of less fertile country. He suggests that some of the readers of the SCIENTIFIC AMERICAN may turn their inventive genius in this direction. According to the De Funiak Springs (Florida) *Signal*, a premium will be offered for the best machine for this purpose exhibited at their autumn fair.

\*C. Purdon Clarke, C.I.E., Keeper of the Indian Section, South Kensington Museum, as reported in the London *Iron Trade Exchange*.

**IMPROVED BORING AND FACING MACHINE.**

We illustrate a novel boring and facing machine constructed by Messrs. George Waller & Co., of Southwark, London, as given in *Engineering*. It was designed more particularly for the manufacture of gas exhausters, but it is also applicable to a wide range of work. The head slides upon two vertical pillars, and can be raised and lowered by a screw operated by a handwheel. Upon the face of this slide there is mounted a cross-slide, carrying two vertical spindles, one within the other, and each driven separately. The inner spindle is actuated by the cone pulley shown to the left, and is provided with a feed motion after the manner of a drill. The outer spindle carries a large face-plate at its lower end, and on this is a ring of bevel teeth into which a pinion on a horizontal shaft gears. The face-plate carries a tool-box provided with a tappet motion for effecting the feed. The apparatus is shown in the view boring a flywheel and facing up the periphery at the same time, and it is evident that there is a great variety of jobs in which it will prove of great service.

**The Electricity of the Lightning Flash.**

When Franklin made his celebrated experiment with the kite, he demonstrated not only that the flash of lightning was simply an electrical discharge, but also its identity with the high tension electric spark produced by a frictional machine. The existence of electricity in the atmosphere appears to be the result of manifold causes. It is apparently a reservoir which receives the energy dissipated by the various processes of nature. The evaporation of water impregnates the atmosphere with minute vapor particles charged with the electric fluid. These currents of warm, moist air being lighter than the cold, dry air, are constantly ascending from the earth, and particularly during the middle and after portions of the day. As these currents rise in succession, the moist air ascends higher and higher in the atmosphere, and, losing heat, is no longer able to retain the moisture with which it is charged.

Condensation then takes place, and a cloud is formed which increases in volume as long as the currents continue to ascend. These cloud masses are each charged with electricities of different tension, and usually differing also from that of the earth. The tendency to restore the disturbed electrical equilibrium causes a discharge between the two clouds, or the cloud and the earth, as the case may be, as soon as the difference in tension is sufficient to overcome the resistance of the air. As

The entire danger from lightning is when the discharge is between the earth and the cloud. While this discharge is beyond man's control, it is within his power to direct such an electric current so that it shall be harmless. He cannot avert it, but he can, by providing a suitable conductor, prevent in many cases the actual flash, by substituting a silent discharge, or transfer the current through a channel which will be uninjured by its passage. This is the mission of the so-called "lightning rod." There are a number of instances on record where the principle of the lightning rod has been carried out accidentally, with disastrous results, owing to the nature of the conductor. One

The resistance offered by the bodies of the persons completing the circuit was too great, however, for their safety. It often happens that the rods are so carelessly adjusted and maintained that they are inefficient for the protection of the building so equipped. But the value of a properly constructed rod is proved by the experience of the British navy, where no loss has occurred since the adoption of a lightning conductor. The ships are probably struck as often as formerly, but in the absence of an electric explosion, no damage is done.


The best form of conductor is one which offers the least possible resistance to the passage of the current. Prof. Hughes, who has given the subject careful study, states as the result of his experiments that a solid rod of iron is a very bad form, because of the self-induction in such a conductor. A ribbon form is considered very good, but should be wider if made of iron than in case of copper, in order to afford equal conductivity. He also recommends iron conductors made of numerous stranded wires.

**Morrhual, the Active Principle of Cod Liver Oil.**

Dr. Lafarge, of Paris, has separated from cod liver oil a substance containing all the active ingredients of the oil except the fat. This substance he calls morrhual. It contains twelve times as much iodine, bromine, and phosphorus as the original oil, but these elements exist in a state of combination difficult to destroy. The quantity of morrhual obtainable varies, according to the quality of the oil, from 1½ to 6 per cent. When cod liver oil is deprived of the morrhual, it no longer possesses the properties which make it so valuable, and acts simply as a fatty substance. In order to cover the disagreeable taste of the morrhual, it is best given in capsules containing five grains of the extract, corresponding to a drachm and a half of the crude oil. Two of these capsules a day in young children, or four daily in older children, have, Dr. Lafarge says, proved of great service in his hands. It also relieves the cough of phthisis.—*Medical Record*.

**To Clean Brass.**

Make a mixture of one part common nitric acid and one-half part sulphuric acid in a stone jar, having also a pail of fresh water and a box of saw dust. The articles to be treated are dipped into the acid, then removed into the

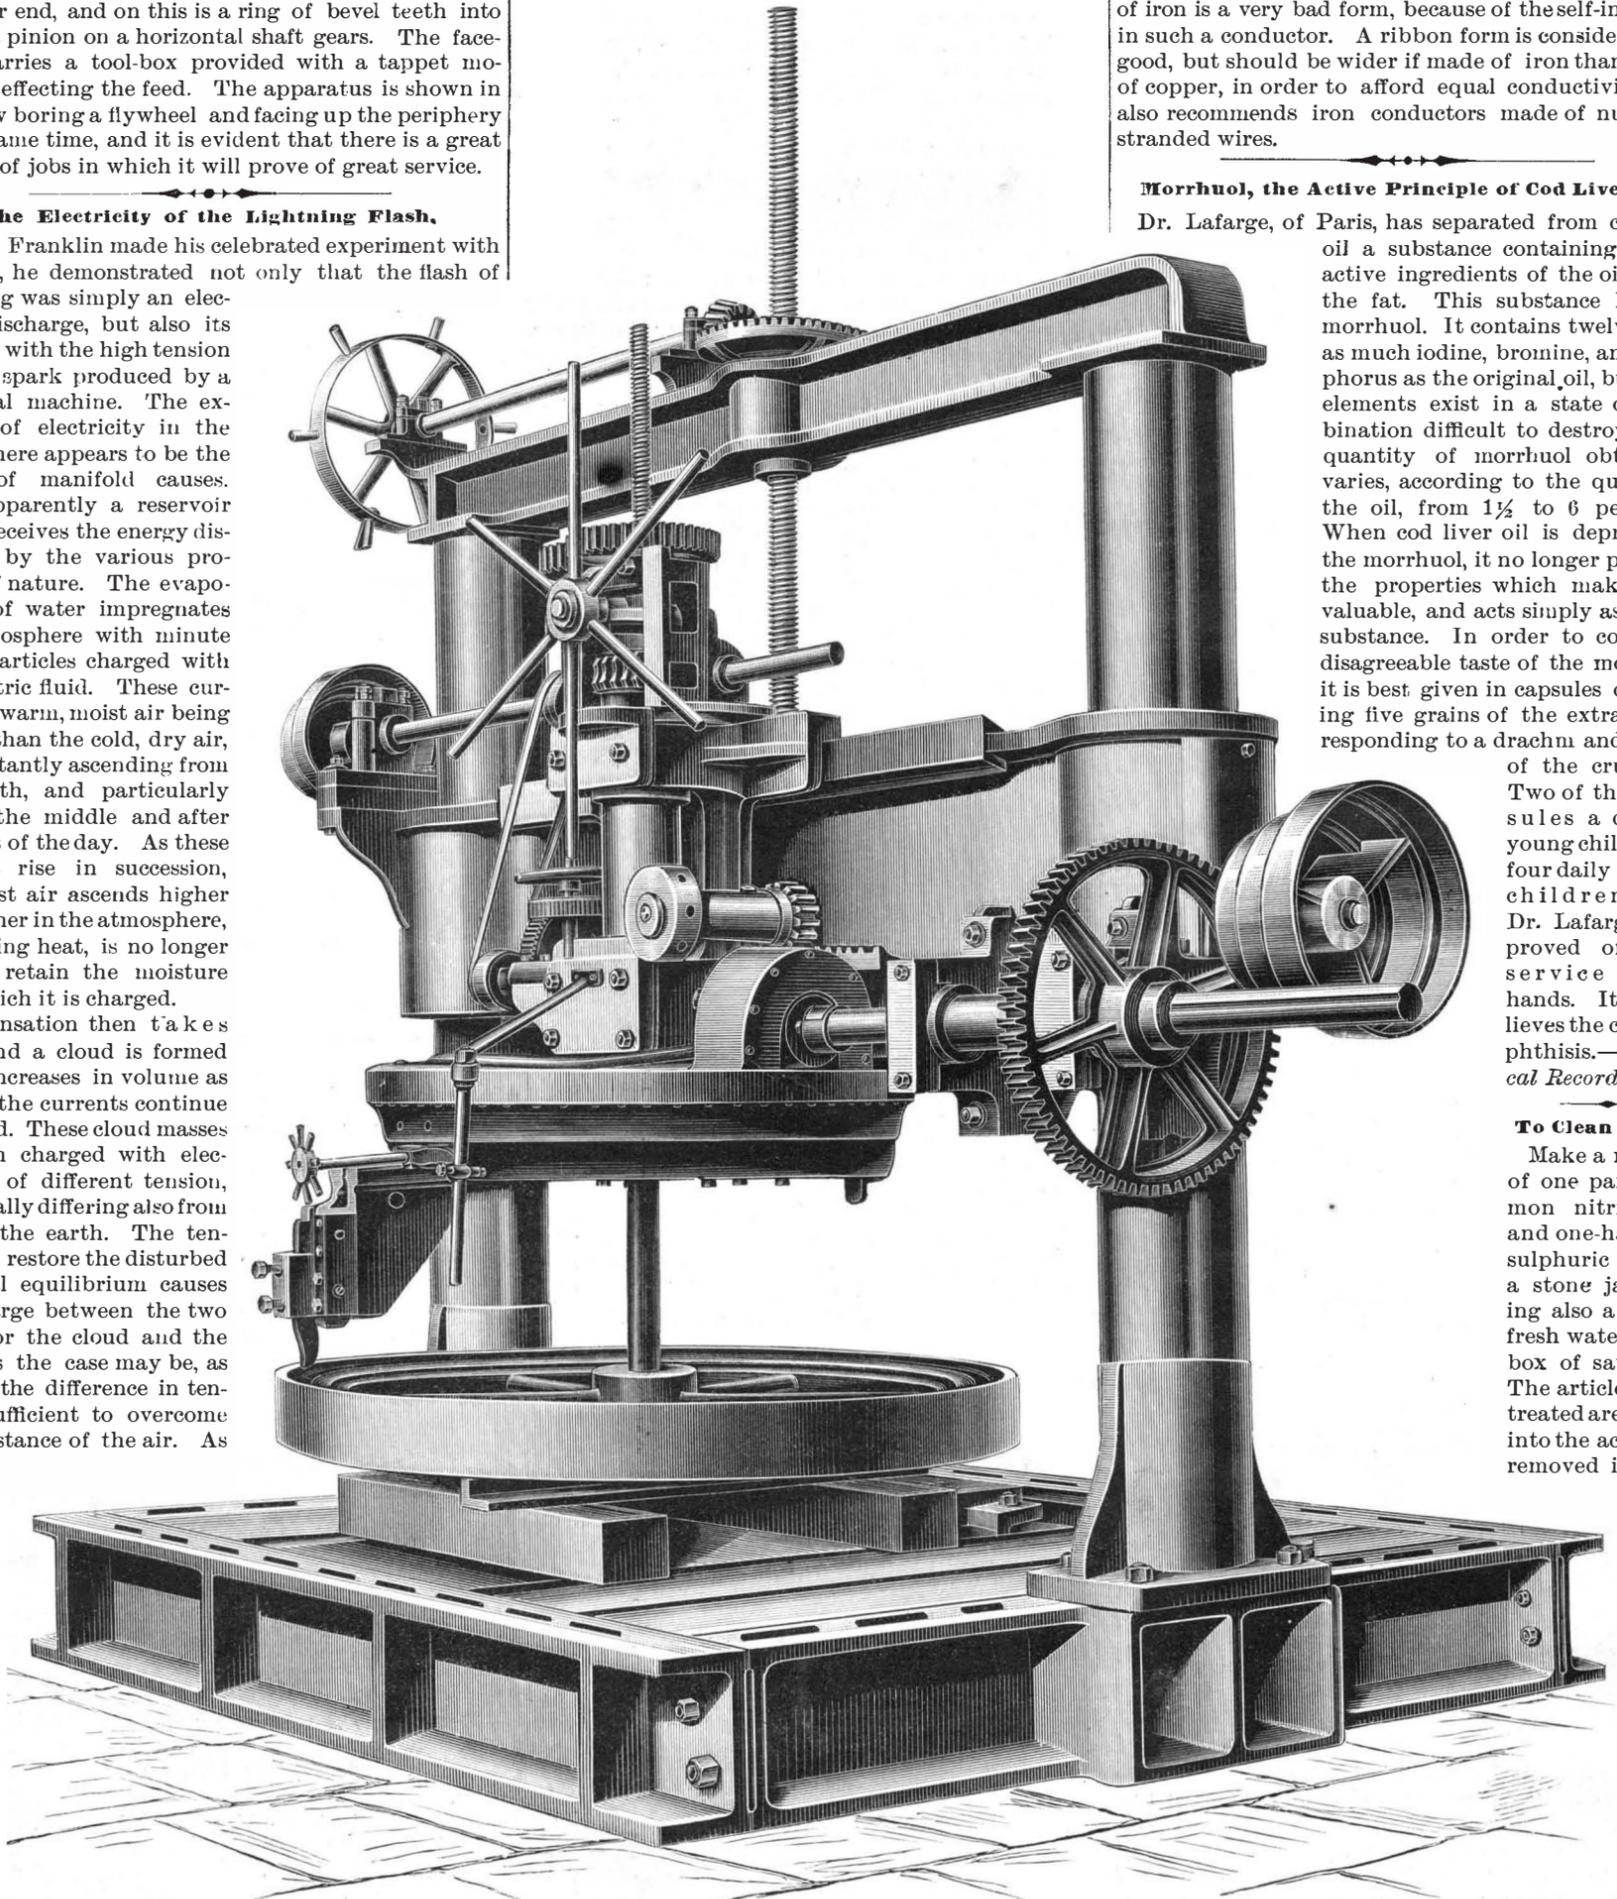**IMPROVED BORING AND FACING MACHINE.**

the resistance of the air is dependent upon distance and humidity, it usually happens that the overcharged cloud discharges into one of less tension and in comparative proximity. Of the many thunderstorms occurring every summer, and the frequent flashes of lightning with which they are accompanied, there are probably comparatively very few discharges which ever reach the earth at all. The interchange in the large majority of cases is between two clouds or between two bodies of air of opposite tension. The damage done by lightning would be much in excess of its present total were this not the case. From the passage of the spark from cloud to cloud we need no protection, for the earth is entirely without the circuit.

notable case, probably familiar to some of our readers, occurred many years ago in Brittany, where the church bells were rung at the approach of a storm, in order to warn the people. In several of these churches during the course of the storm, the towers were struck while the bells were still ringing, and the unfortunate persons who had hold of the ropes were either killed or severely injured. Other churches, the bells of which were silent, escaped harm. An explanation of the incident is found in the fact that the large mass of metal of the bells, being in imperfect connection with the ground through the hempen rope and the bell tollers, offered a better conductor for the passage of the electricity than the surrounding air,

water, and finally rubbed with saw dust. This immediately changes them to a brilliant color. If the brass has become greasy, it is first dipped in a strong solution of potash and soda in warm water; this cuts the grease so that the acid has free power to act.

CAST IRON pulleys may be lagged with leather without the use of rivets, by first brushing over the surface with acetic acid, which will quickly rust it and gives a rough surface; then attach the leather to the face of the pulley with cement composed of one pound of fish glue and one-half pound of common glue.

**TRIPLE CALLA LILY.**

We illustrate in the cut a remarkable example of a triple spathe Calla æthiopica. The specimen is in the possession of Mr. A. T. F. Lampe, florist, of Jersey City. It measures eleven inches from tip to tip of the opposite spathes, and six inches across the face in the opposite direction. Although generally spoken of as the flower of the calla lily, the white spathe is only a slightly modified leaf, and has no relation to any individual blossom. The thick pillar or spadix in the axis is covered with a thick mass of small antheriferous flowers. These are the real blossoms, and the white leaf or spathe that sweeps around the base of the spadix or flower stalk recalls by its shape the green leaves that grow on the regular leaf stalks. The well known Indian turnip and various other plants exhibit this same peculiarity in their way of blossoming. As its name denotes, the C. æthiopica was a native of South Africa. It was introduced into England in 1731. We learn from Mr. Lampe that fifteen years have passed since he saw a triple calla, and that this is the finest one that ever met his observation. The double are not so rare as the triple ones, but either kind can only be called a freak of nature. In all probability, the same plant will never again show the same phenomenon. Out of several thousand flowers that have bloomed in his greenhouses this season, this is the only one of the double or triple variety. There is no way of propagating them.

**EXPERIMENTS IN ATMOSPHERIC PRESSURE AND CONDENSATION OF STEAM.**


BY T. O'CONNOR SLOANE, PH.D.

Since the earliest days of science, the phenomena of atmospheric pressure and different illustrations of the gravity of the air have formed one of the most interesting of the experimental departments of natural philosophy.

While various phenomena connected therewith were known from the earliest days, one of the glories of modern times is the assigning to these facts their true cause. Up to the days of Galileo, the expression of the cause was contained in the words, "nature abhors a vacuum." Inspired by this brilliant man, who was his master in science, Torricelli investigated the subject, and invented the barometer. At about the same period, Pascal, in France, not knowing fully any of the details of Torricelli's work, also investigated the subject of atmospheric pressure, which investigation was one of the classic works of his life. He reasoned out that the barometric column was sustained by the absolute weight of the air pressing upon the mercury outside the tube.

He caused a barometer accordingly to be carried to the top of the Puy de Dome, the principal peak of the Auvergne, situated near the village of Clermont-Ferrand. His brother-in-law Perrier did this for him, watching eagerly the height of the barometric column as he ascended. He found that it fell continually as a greater height was reached, until it was depressed several inches at the summit. This was in exact accordance with Pascal's prediction. In Perrier's words, the result "ravished us with admiration."

Otto von Guericke, the famous burgomaster of Magdeburg, won his title to fame by his experiments in pneumatics. Adjoining the wall of his house he erected a water barometer, whose long tube reached well up to the eaves. On the upper surface of the water within the tube he floated the image of a little

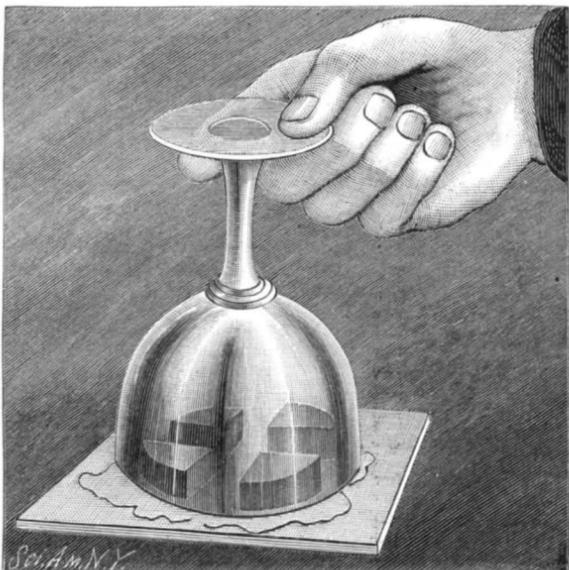


EXPERIMENT IN ATMOSPHERIC PRESSURE.

man, which rose and fell with the barometric column, prognosticating to some extent by his movements the coming weather.

From this experiment it would seem that Von Guericke did things on a large scale.

His other work carries out this idea. He made Magdeburg hemispheres so large that the force of eight horses applied to one of them could not pull them apart. He constructed a cylinder and piston of such

dimensions that a large number of his fellow burgomasters pulling simultaneously were unable to raise the piston against the atmospheric pressure. All his experiments he could not have carried out without an air pump, and he has come down to posterity with augmented honor as the inventor of this instrument. Torricelli, Pascal, and Von Guericke did all the fundamental work in pneumatics, and what has been

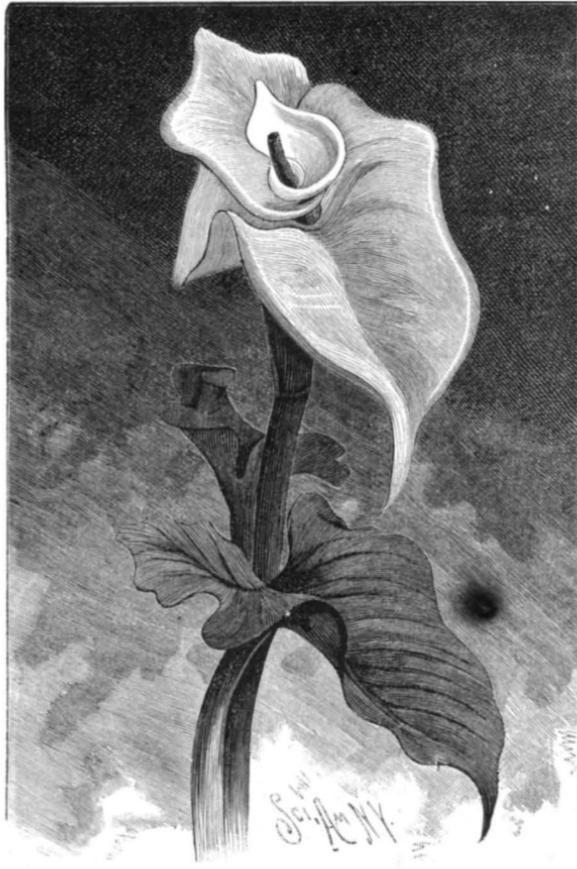

TRIPLE CALLA LILY.

since done has been the carrying out of their work to its legitimate conclusion.

In the cut is represented a modification of an old experiment, but which departs sufficiently from it to possess an interest of its own. The original experiment is familiar to many of our readers. A tumbler or wineglass is partly or entirely filled with water, a piece of writing paper is placed over its mouth, is pressed against it tightly by the palm of the hand, and the whole inverted. On withdrawing the hand, the paper remains attached to the glass, and the water does not escape, being upheld by atmospheric pressure.

If the glass was only partly filled with water, the success of the experiment is due to the flexibility of the paper. The paper is pressed into the glass a little by the hand, and when the hand is removed, gives way or bulges out a little.

The effect of this is to permit the rarefaction or expansion of the air contained in the glass above the water; thus, in the usual phrase, etymologically incorrect, but very convenient, a partial vacuum is created, and the paper upheld.

In the modified experiment, an inflexible substance, a plate of glass, is substituted for the paper. To perform the experiment with this, the glass must be completely or very nearly completely filled. The presence of any considerable amount of air in it would cause it to fail, as the glass plate could not bulge out under the pressure of the water. A wineglass or tumbler with very even edge is placed on a level table, filled almost to overflowing with water, and a flat glass plate, by sliding or otherwise, is placed over its mouth, so as to exclude every bubble of air. If this be inverted, the glass plate being held in place while so doing, it will remain attached to the vessel on withdrawal of the hand, but in a state of extremely unstable equilibrium. The plate can hardly be said to be in contact with the edge of the tumbler, a thin film of water intervening, so that on the least inclination the plate slides off. To make it more secure, four pieces of cork may be attached by sealing wax to the surface of the glass that comes next to the tumbler, which prevents this sliding. It is a beautiful illustration of the low expansibility of water.

A small amount of water may be placed in the tumbler, and a little more than an equal volume of alcohol may be mixed with it. A lighted match may now be held within the vessel for a few moments, or until the vapor of alcohol catches fire. After it has got quite warm, a plain piece of glass is placed upon it and it is inverted as before. If this is properly performed, the plate of glass will adhere strongly to the tumbler under the effects of the partial vacuum.

In the other cut, the production of a steam vacuum is illustrated. A small amount of water is brought into a state of ebullition, and maintained so for a few minutes. The flask is then inverted quickly into a bowl containing more than enough water to fill it, its

open neck reaching well down to the bottom of the vessel. For a moment nothing happens; but as the steam begins to condense, water rises rapidly into the flask, filling it completely, sometimes with such violence as to break it.

This experiment may be performed with an Italian wine bottle from which the straw cover has been removed. It is an historical experiment, and was performed with one of these identical bottles by Capt. Savery, one of the early inventors of the steam engine. The account of the experiment may be found in vol. ii. of *Experimental Philosophy*, by Dr. Desaguliers, published in London in the year 1734.

**Contractors Estimating on Public Works.**

The great discrepancy in the bids of contractors for engineering and other public works seems quite a mystery to the uninitiated in such matters, and one we will not attempt to explain. The *Building Trades Journal* seems also unable to explain the reason for the wide difference in the proposals.

Our readers, it says, have doubtless observed the strange discrepancies that existed between the bids on government building work published in these columns every month, and it has given rise to the suspicion that such estimates are a matter of pure guesswork. Private bids are often astonishing in their character, but the difference between them is generally confined to the limits of the percentage which is supposed to represent the margin or profit after the cost of labor and material has been deducted.

With government work there seems to be some unknown quantity not appearing in the clearly drawn specifications which creates a large additional percentage of doubt whether there will be any profit in the work.

As notable examples of the "close margins" which are supposed to be the result of open competition, we select a few figures from contracts awarded since January 1, which ought to provoke some discussion:

For stone work and setting for Louisville, Ky., court house, under advertisement dated November 25, 1886: lowest bid, \$86,521; highest, \$291,745, or 233 per cent higher.

For iron work for Erie, Pa., court house, advertisement of February 24: lowest bid, \$5,818; highest, \$10,817, or 86 per cent higher.

For plastering Pensacola, Fla., court house, advertisement of April 1, 1886: lowest bid, \$3,243; highest bid, \$18,521, or 475 per cent higher.

For approaches to Dubuque, Ia., court house, advertisement of December 3: lowest bid, \$549; highest, \$1,119, or 106 per cent higher.


For plastering Toledo, Ohio, court house, advertisement dated November 21: lowest bid, \$5,120; highest, \$10,000, or 96 per cent higher.

For plaster models for court house at Lynchburg, Va., advertisement of December 10: lowest bid, \$78; highest, \$1,059, or 1,260 per cent higher.

For iron beams for Brooklyn post office, advertisement of December 5: lowest bid, \$1,850; highest, \$3,110, or 70 per cent higher.

For lathing and plastering Oxford, Miss., court house, advertisement dated January 7: lowest bid, \$1,775; highest, \$4,443, or 150 per cent higher.

For iron beams for Pittsburg, Pa., court house, advertisement of January 15: lowest bid, \$2,360; highest, \$4,617, or nearly 100 per cent higher.

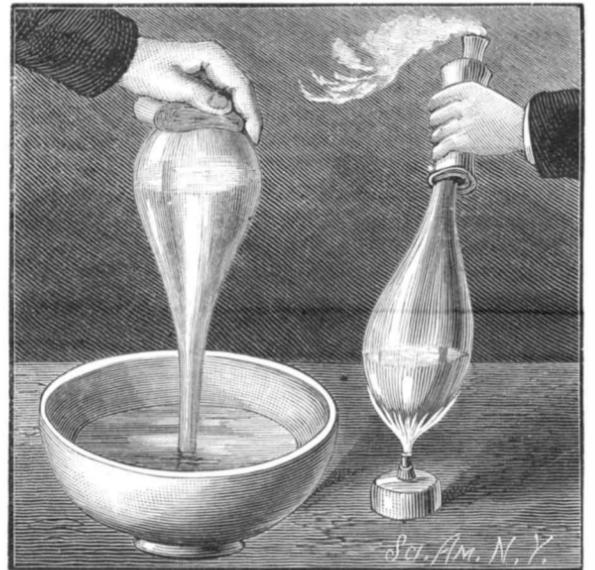

EXPERIMENT IN CONDENSATION OF STEAM.

It would be natural to suppose that the difference in cost of transportation of materials from the various points of supply to the scene of operations would be some excuse for a variance in estimates, but it can hardly seem to account for more than one-fourth, at the most, of the difference of from 75 to 475 per cent between the lowest and highest ideas of the value of the work.

Will some one enlighten us upon the subject?

## ENGINEERING INVENTIONS.

A station indicator for cars has been patented by Mr. William W. Currie, of Smith's Falls, Ontario, Canada. In a box having a glass front are drums and rollers operated by a coiled spring, to draw into view the names of stations, distances, etc., properly arranged upon a ribbon, for the information of passengers, the machine being easily started by a conductor or brakeman.

A car coupling has been patented by Mr. George J. Ferguson, of Greenville, Texas. Combined with a vertical channel intersecting the link throat, and a hooked projection, is an inverted U-shaped coupling, having a hook on its rear side, and a lift arm for raising and sustaining the coupling device, with other novel features, designed to furnish a positive automatic coupling, for coupling cars without going between them.

## MISCELLANEOUS INVENTIONS.

A lamp burner has been patented by Mr. Charles E. Tucker, of Salida, Col. The lamp chimney is made to receive an internal auxiliary cone, and holes are made in the sides of this cone near its base, in order to concentrate upon the flame the air drawn into the burner.

An egg preserving crate has been patented by Mr. Nicholas A. Wierman, of Aspers, Pa. It is so made that a large number of eggs may be turned partly over by drawing out the bottoms of several series of compartments in which the eggs are arranged, thereby promoting the keeping of eggs for a long period.

A roller gate hinge has been patented by Mr. George N. Crichton, of Parsons, Kansas. It consists of a bar or plate having a central socket, and provided with a laterally projecting pin near each end, grooved rollers on the pins, and a bolt having an upright arm fitting in the socket of the bar or plate.

A wagon axle has been patented by Mr. John Lucksinger, of Beaufort, Mo. The skeins and cap nut are so made that the axle may be oiled without removing the wheel, and the device is calculated to take up the wear of the skein, so the wheel may always be made to run true upon the axle and prevent chocking.

An automatic check for music boxes has been patented by Mr. Charles E. Juillerat, of New York city. Combined with the cylinder and comb of a musical box is a wheel on the cylinder, a cam wheel, projecting teeth, a pawl and lug, etc., to check the cylinder when the flier cylinder gets out of order or is removed.

A process of and apparatus for coating paper and other fabrics has been patented by Mr. Edward G. Sparks, of Brooklyn, N. Y. It consists in drawing the web of material through a bath of melted wax, paraffine, or other coating substance, the tank having an adjustable slit through which the web passes, carrying the required amount of coating substance.

A pen and pencil holder has been patented by Mr. Frederick P. Peiter, of Norwalk, Conn. It consists of a ring with a diagonal cross piece, on the ends of which loops are formed for receiving the pencil, whereby a pen or pencil may be held on one of the fingers, so as to be very handy for use and out of the way when not in use.

A holder for photographic paper negatives has been patented by Mr. Erastus B. Barker, of New York city. It is in the form of a slide with attached folding or hinged frame, capable of being entered within the ordinary plate holder of a camera, and serving to hold the sensitized paper in position behind the lenses, for taking the photographic picture.

A culm bar has been patented by Mr. Silas M. Hess, of Bloomsburg, Pa. It consists of parallel bars united by cross pieces and slotted sections, each having a V-shaped recess at one end and a V-shaped projection at the other end, and with bottom lugs fitting between the parallel bars, so that the culm may be perfectly burned, without loss.

A carpet stretcher has been patented by Mr. Enos B. Willix, of Dows, Iowa. It consists of two jaws connected by a hinge joint at their outer or front edges, with ribbed meeting faces and adjustably connected levers, with other novel features, the device being designed to subject the carpet to a high strain without injuring the texture of the fabric.

A sled brake has been patented by Mr. Samuel H. Anderson, of Maddensville, Pa. The brake is operated by means of a lever, by operating which the ends of U-shaped dogs are projected to engage with the roadway in such manner as to check the advance of the sled, and also to hold it from running back when stopped on an up grade.

A gate has been patented by Mr. William Mason, of Puyallup, Wash. Ter. It is a sliding gate, with locking latches at its opposite ends, and sliding bars or rods on the top of the gate, an operating cord extending at opposite sides of the gate and connected to the sliding bars, so that a quick pull on either of its handles will unlatch and open or close the gate.

A bicycle shoe has been patented by Mr. Thomas J. Strickland, of Randolph, Mass. The invention consists in a shoe with a buckskin sole, and in a canvas shoe having the bottom parts of its upper made of leather, the shoe being so made as to be very flexible throughout, and so that it cannot slip on the pedal.

A slag cart has been patented by Mr. August Werner, of Leadville, Col. In the bottom of the bowl or ladle receiving the smelted metal, such bowl being suitably mounted in a frame on wheels, is a removable nozzle, so that a longer or shorter nozzle may be used as desired, to facilitate the separating of the matte from the slag.

A funnel has been patented by Mr. Harmannus Van Kammen, of Grandville, Mich. It is a measure, with a conical bottom, in the center of which is a screw-threaded nipple receiving a tube, a yielding valve seat being between the tube and nipple, and a ball valve communicating by a rod with a valve-closing spring attached to the handle of the measure.

A truss has been patented by Mr. John R. Jones, of Emporia, Kansas. The body spring made of flat spring metal, carries pad arms which may be adjusted with clamps to be set at any point in a circle described from the clamp as a center, so the truss may be used with equal facility for either direct, oblique, or femoral hernia.

A velocipede has been patented by Mr. David G. Biggs, of Louisville, Ky. This invention relates principally to a novel arrangement of the crank shaft and connections, whereby all the force or power exerted by the rider is utilized in driving the machine, and the movement is such as to decrease "wabbling" of the machine.

A door hanger has been patented by Mr. Le Grand Terry, of North Elmira, N. Y. This invention covers a novel construction and arrangement of parts to adapt a hanger for sliding doors to be adjustable to doors of different thicknesses, and to permit the door to be swung outward without derailing the hanger or its main wheel.

A nut lock has been patented by Mr. Louis Unger, of San Antonio, Texas. The nut has in its rear face a non-circular recess, whose walls are serrated, and from this recess notches extend to the side of the nut, the locking washer having its edge formed to fit those of the recess, so that when it is in such recess it will be held from turning.

A metallic ceiling has been patented by Mr. John D. Ottiwell, of New York city. Sheet metal mouldings are formed with side flanges, to be nailed to the beams or to furring strips, and the mouldings are made to receive and hold the edges of the panels, avoiding the necessity of nailing them, and facilitating the work of putting up the ceiling.

A sash fastener has been patented by Mr. George N. Clemson, of Middletown, N. Y. It is a spring-acted latch pivoted to a horizontal plate, with a nib projecting beyond the edge, a roller carried by the latch projecting beyond the edge of the nib, to carry the latch past the rail of the upper sash, and a catch for receiving the nib of the latch when the sashes are closed.

A horse collar has been patented by Messrs. William L. Bailey, Leonard T. and Lenis D. Knight, of Calvert, Texas. It is made principally of what is known as "moss yarn," with its strands or fibers arranged, and the body of the collar subjected to pressure in a mould or press, making an easy fitting and self-adjusting collar for farm and other use.

A knockdown crate has been patented by Mr. Charles P. Lewis, of Sweet Springs, W. Va. The end and side pieces are dovetailed together with a square dovetail, and apertured for the insertion of rods to hold the box when set up, on the removal of which the box can be readily folded for shipping, it being adapted for carrying fruit or goods of various kinds.

An automatic check for music boxes has been patented by Mr. Alfred Sneur, of New York city. It is so connected with the music box mechanism that when the latter is rotated too fast a ratchet wheel is made to force a pawl into locking engagement and stop the mechanism, thus preventing the breaking of the pins and the teeth of the comb.

A circular-saw dresser has been patented by Mr. Hyman D. Wolcott, of Wright's, Pa. It consists of a pair of beveled and circular files, mounted in a frame secured to the guiding arms of a saw jointer, arranged to be adjusted to or from the saw and held in yielding connection therewith, and is an improvement on a former patented invention of the same inventor.

A snap hook has been patented by Mr. George R. B. Swanton, of New York city (the Bancroft House). It has a chambered shank, in which is fitted an obliquely sliding bolt, and a spring for projecting the bolt and retaining it in a projected position in the bow of the hook, making a simple and secure hook for use in connection with gate fastening chains, parts of harness, etc.

A churn has been patented by Messrs. Daniel Lines and Charles T. Long, of Milano, Texas. The body of the churn is of stone or earthenware, and preferably square in form, and it has dashers worked in opposite directions by rotating a handle connected with bevel driving gear, the construction being simple and effective, and the churn easily kept thoroughly clean and sweet.

An exhibiting device has been patented by Mr. Joseph P. Wilson, of Centralia, Kan. A clock train, with dial face and hand showing on the front of a case, is arranged to disengage detent mechanism, while a second train drives a carrier shaft carrying radially projecting arms, with various other novel features, constituting an improved device for exhibiting advertisements, photographs, etc.

A drier intended especially for drying tobacco has been patented by Messrs. Gilmer and Chas. N. Meriwether, of Guthrie, Ky. This invention consists of a specially devised sheet metal screen arranged to be suspended above an open fire, to protect tobacco from sparks thrown off during combustion.

A drier, more especially adapted for white lead and other pigments, has been patented by Mr. Arthur Buel, of New York city. Drying belts or aprons are employed, on which the pigments are deposited and heat applied, so the substance will be dried in small lumps or balls, which can be handled without waste, the belts being arranged in vertical series and the material discharged from one to the other while being dried.

A fruit drier has been patented by Mr. William S. Plummer, of San Jose, Cal. The heat conductors are constructed in a manner intended to form a vacuum above the trays, to draw the heated air up through them, thus expediting the evaporation of the juices, and preventing any dampening by the vapors from the lower trays, the invention being an improvement on a former patented invention of the same inventor.

A fishing reel has been patented by Mr. Julius vom Hofe, of Brooklyn, N. Y. The reel heads are made of hard rubber, with the inner metal plates of

open work finish, or in the form of braces embedded in the rubber before vulcanizing, with the plates afterward recessed on their inner faces in common with the rubber, to receive the rotating spool heads, making a cheap, light, and strong reel.

A fifth wheel has been patented by Mr. Joseph V. Alexander, of Taylor's Chapel, Tenn. This invention affords an improvement in ball and socket couplings, for connecting the front axles of wagons and carriages to the bolsters, the socket having end openings or slots and the ball a radial slot extending through it, while the axle and its attached block have a segmental form, adapting it to fit in and fill the slot.

An automatic dumping and discharging apparatus has been patented by Mr. John T. Evans, of Adamsville, Utah Ter. Combined with a supporting frame is a pivoted and counterbalanced dumping cage, having one end open and the other curved upwardly, an entry for guiding a bucket into the cage, and a stop for arresting the cage when tilted, to facilitate discharging ore, coal, etc., on cable railways.

A flour bolt has been patented by Mr. Kennedy Dougan, of Calwood, Mo. Within a cylindrical chest is a reel on which is a series of vertically yielding pivots, conveyer wings being mounted on the pivots, and the adjacent surfaces of the wings and reel having projections and recesses to hold the wings in position, the design being to simplify construction, lessen cost, and economize space.

A windmill has been patented by Mr. David B. Wood, of Sibley, Iowa. According to this invention, the floats are arranged in sets and carried by a hollow vertical shaft that is supported in a properly constructed tower, the construction being such as to make a cheap, efficient, and durable form of windmill, the fan arrangement also being applicable to ordinary forms of windmill.

An apparatus for facilitating the multiplication of numbers has been patented by Mr. Jules V. Charpentier, of New Orleans, La. This invention covers improvements on a former patented invention of the same inventor, intended to improve the construction and to better prevent the possibility of misreading the figures of several sheets, or reading from one row figures of one sheet when another should be considered.

A wagon bolster has been patented by Mr. John M. McNeese, of West Liberty, Pa. It has at its opposite ends sockets fitted to receive tenons on the lower end of the stakes, a bolt passage intersecting the socket, and the tenon having an edge notch, the fastening bolt entering such edge notch to secure the standard, the bolster being especially adapted for bob sleighs in the lumber regions.

A tailor's measure has been patented by Mr. Anton Schad, of Louisville, Ky. It is a leather belt about an inch wide and fifty inches long, laid off in inches and parts of inches, and on one side is attached a steel band, set a little distance from the plane of the belt, upon which is adjusted a sliding back measure and sliding arms, the measure being intended to facilitate measuring and laying off garments with accuracy.

An instrument for measuring powders has been patented by Mr. Joseph J. Stevens, of Coalesburg, Mo. It consists of a tube on which is a graduated scale, a piston in the tube being adjustable to regulate the quantity of powder, and the powder being then readily forced out by the piston, the device being intended to facilitate the exact and rapid measuring of proper doses in medical practice.

A folding box has been patented by Mr. Jonah R. Cole, of New York city. The bottom is made in one piece with the end and side pieces, the surplus material at the corners being folded and lapped, and eyelets inserted, through which is passed a draw string or tape entirely around the box, so that by drawing upon the ends of the string the box may be drawn to folded position, and so tied.

A car starter has been patented by Messrs. Charles L. N. T. Hansen and Christian N. Fischer, of Plainfield, N. J. The invention consists of an endless chain and pulleys attached to the driving shafts, a clutching device operating on the chain and against springs, there being a brake and a device for throwing the clutch in and out of gear with the chain, the device accumulating power at the will of the operator while the car is in motion.

A bottle stopper forms the subject of two patents issued to Mr. Charles L. Morehouse, of Brooklyn, N. Y. The bottle head has an inner angular groove and triangular rabbet, and a rubber packing ring has a flange to fit in the groove and against the rabbet, while there is a hard rubber or other ball valve fitting against the bottom bevel of the packing ring, with other novel features, the devices making a simple and effective internal and external bottle stopper, adapted for use on bottles for receiving plain and effervescent liquids.

## NEW BOOKS AND PUBLICATIONS.

MODERN STEAM ENGINES. By Joshua Rose, M.E. Philadelphia: Henry Carey Baird & Co., 1886.

Though quite elementary in its character, and written almost entirely from the workshop point of view rather than the theoretical, Mr. Rose's latest volume covers almost the whole ground of steam engine construction. It is written in a plain, straightforward style that will commend it highly to those who search for information in its most available form. It is intended for beginners in the study of the steam engine, no less than for more advanced students, since care has been taken to omit nothing that is essential to a thorough understanding of the subject. Particular attention has been given to the various kinds of slide valve motions, as the distinguishing features of each class of engines depend largely upon these differences. Each subject has been treated so as to be complete in itself, and while this has necessitated repetition in several instances, it makes the work much more valuable for reference. Nor is the repetition a disadvantage for its own sake, as the essential features of an engine

cannot be learned too thoroughly. In addition to the consideration of the steam engine as a general motor, and its construction for particular classes of service, some little space is devoted to its application to pumps, drills, air compressors, and other mechanisms driven by the direct use of steam. The volume is one that can be cordially recommended, even in the face of the large competition to which all such works are now open.

## Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Greene, Tweed & Co., Railroad and Manufacturers' Supplies, have removed to 83 Chambers St., city.

Tunneling Under the Hudson River. Giving full particulars of the prosecution of the work thus far. With working drawings, in 27 handsome plates, showing all details. By S. D. V. Burr. \$2.50. For sale by Munn & Co., 361 Broadway, New York.

Emery and Corundum in quantity to suit. Walrus and other leather for polishers. Greene, Tweed & Co., N. Y.

Machinery, Tools, and Supplies of all kinds. Prices on application. Estimates furnished. C. L. Jackson & Co., successors to Jackson & Tyler, No. 54 German St., Baltimore, Md.

"That dire disease, whose ruthless power Withers Beauty's transient flower," is often found lurking around the citadel of Life, in the disguise of a cold, like an unsuspected enemy in camp. For colds or coughs, weak or sore lungs, sore throats, bronchitis, asthma, and all diseases that lead to consumption, and for consumption itself, take Dr. Pierce's "Golden Medical Discovery."

Empire Gum Core, Soap Stone, Rubber, and all kinds of Packing. Greene, Tweed & Co., 83 Chambers St., N. Y.

Moneyless Inventors! Capital furnished for procuring your patent for half interest in same. Correspondence confidential. Address "Patent," care W. H. Ohler, 18 Locust St., Portland, Me.

Wanted—Propositions from builders of ice machines, to erect a 25 ton machine for W. H. Howe, Nashville, Tenn.

Send to the Railroad Gazette, 73 Broadway, New York, for a catalogue of Locomotive, Track, and other railroad books.

Emery Wheels of unusually superior quality for wet grinding. The Tanite Co., Stroudsburg, Monroe Co., Pa.

A Catechism on the Locomotive. By M. N. Forney. With 19 plates, 227 engravings, and 600 pages. \$2.50. Sent on receipt of the price by Munn & Co., 361 Broadway, New York.

Guild & Garrison's Steam Pump Works, Brooklyn, N. Y. Pumps for liquids, air, and gases. New catalogue now ready.

Nickel Plating.—Sole manufacturers cast nickel anodes, pure nickel salts, polishing compositions, etc. \$100 "Little Wonder." A perfect Electro Plating Machine. Sole manufacturers of the new Dip Lacquer Kristalline. Complete outfit for plating, etc. Hanson, Van Winkle & Co., Newark, N. J., and 92 and 94 Liberty St., New York.

Send for catalogue of Scientific Books for sale by Munn & Co., 361 Broadway, N. Y. Free on application.

The Knowles Steam Pump Works, 44 Washington St., Boston, and 33 Liberty St., New York, have just issued a new catalogue, in which are many new and improved forms of Pumping Machinery of the single and duplex, steam and power type. This catalogue will be mailed free of charge on application.

Machinery for Light Manufacturing, on hand and built to order. E. E. Garvin & Co., 139 Center St., N. Y.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

Iron Planer, Lathe, Drill, and other machine tools of modern design. New Haven Mfg. Co., New Haven, Conn.

If an invention has not been patented in the United States for more than one year, it may still be patented in Canada. Cost for Canadian patent, \$40. Various other foreign patents may also be obtained. For instructions address Munn & Co., SCIENTIFIC AMERICAN patent agency, 361 Broadway, New York.

Grimshaw.—Steam Engine Catechism.—A series of thoroughly Practical Questions and Answers arranged so as to give to a Young Engineer just the information required to fit him for properly running an engine. By Robert Grimshaw. 18mo, cloth, \$1.00. For sale by Munn & Co., 361 Broadway, N. Y.

Hercules Lacing and Superior Leather Belting made by Page Belting Co., Concord, N. H. See adv. page 882.

Nystrom's Mechanics.—A pocket book of mechanics and engineering, containing a memorandum of facts and connection of practice and theory, by J. W. Nystrom, C.E., 18th edition, revised and greatly enlarged, plates. 12mo, roan tuck. Price, \$3.50. For sale by Munn & Co., 361 Broadway, New York city.

Billings' Double-acting Ratchet Drills. Drop Forgings all kinds. Billings & Spencer Co., Hartford, Conn.

Curtis Pressure Regulator and Steam Trap. See p. 142.

New Portable & Stationary Centering Chucks for rapid centering. Price list free. Cushman Chuck Co., Hartford, Conn.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Friction Clutch Pulleys. D. Frisbie & Co., N. Y. city. Vener Machines, with latest improvements. Farrel Fdry. & Mach. Co., Ansonia, Conn. Send for circular.

Tight and Slack Barrel Machinery a specialty. John Greenwood & Co., Rochester, N. Y. See illus. adv., p. 350.

Astronomical Telescopes, from 6" to largest size. Observatory Domes, all sizes. Warner & Swasey, Cleveland, O.

Supplement Catalogue.—Persons in pursuit of information of any special engineering, mechanical, or scientific subject, can have catalogue of contents of the SCIENTIFIC AMERICAN SUPPLEMENT sent to them free. The SUPPLEMENT contains lengthy articles embracing the whole range of engineering, mechanics, and physical science. Address Munn & Co., Publishers, New York.

Notes & Queries

HINTS TO CORRESPONDENTS.

**Names and Address** must accompany all letters, or no attention will be paid thereto. This is for our information, and not for publication.  
**References** to former articles or answers should give date of paper and page or number of question.  
**Inquiries** not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all, either by letter or in this department, each must take his turn.  
**Special Written Information** on matters of personal rather than general interest cannot be expected without remuneration.  
**Scientific American Supplements** referred to may be had at the office. Price 10 cents each.  
**Books** referred to promptly supplied on receipt of price.  
**Minerals** sent for examination should be distinctly marked or labeled.

(1) F. H. S. asks: In the dynamo described in SUPPLEMENT, No. 161, the wire of the armature is, as I understand, passed between the sections of the copper or brass ferrule of the commutator; do they touch both sections of the ferrule? A. The terminals are attached each to one section of the commutator.  
 2. How are they fastened—by soldering, or just laid in? A. Soldering with resin flux is best.  
 3. Is it necessary to alter them from the round shape to fit snug with a smooth surface, and touch the commutator springs? A. The wires do not touch the commutator springs; they need no flattening.  
 4. What weight of 12 cotton-covered wire would it take on the magnets for one twice the size and one four times the size of the one described? A. 20 pounds and 80 pounds, about.  
 5. If the machine is left in a damp place, the magnets and armature will be apt to rust; how should it be treated to prevent this? A. They will not rust much if of cast iron. Varnishing will prevent it.  
 6. In making a U-shaped electro magnet, what is the best wire to use for one 3 or 4 inches long, and would there be much difference if one was wound with 12 and another with 36, using the same battery power? A. It all depends on your battery, line resistance, etc. For experimental lifting magnets use No. 16 to No. 20.

(2) H. G. asks: How much will the expansion of a brass bird cage spring composed of about 6 feet of brass wire about as large as an ordinary darning needle and subject to 100 and to 50 degrees of heat be? And will the expansion run in the wire if it is coiled into a spring as above? A. A brass wire 6 feet in length will expand lineally  $\frac{3}{16}$  part of its length, or 0.074 inch, from 32° to 132° Fah.; from 152° Fah. to 182° Fah., 0.037 inch, about. The wire will expand whether coiled or not.

(3) Commander of the Electra asks where he can receive instructions in naval architecture and yacht or ship designing. A. Best with some company such as the Harland & Hollingsworth Manufacturing Company, of Wilmington, Del., or by obtaining admission to Annapolis United States Naval Academy.  
 2. Has any electric pumping machinery ever been invented? If so, when and where is it procurable? A. Address Edison Electric Company, 65 Fifth Avenue, New York.  
 3. What is the address of Professor Tuck, the inventor of a submarine torpedo system? A. The Tuck torpedo is owned, we believe, by the Submarine Torpedo Company, 20 West 23d Street, New York city. The inventor Josiah H. L. Tuck, is a resident of San Francisco, Cal.

(4) C. O. writes: 1. Will you please tell me how I can increase my weight? I am over 6 feet tall, and weigh but 150 pounds. Would like to increase it about 25 pounds. A. It will depend upon your constitution whether such increase would be possible. If you enjoy normal health, and have no obstacles in the shape of dyspepsia or other disease, you can probably gain in weight by proper attention to your diet. Milk, taken just before retiring, and slowly sipped in order to permit a thorough mixing with the gastric juices, will be very fattening. The late Dr. Ellerslie Wallace, Dean of Jefferson Medical College, Philadelphia, once recommended one of his broken down students to eat plenty of butter during the summer vacation. In the fall a stout, hearty man presented himself before the Doctor. So great was the change in his appearance, that he had to introduce himself as the invalid student of the previous spring. He had spent the summer at his home in Virginia, and had eaten three pounds of butter a week. It will be unnecessary to add that such a diet must be accompanied by plenty of exercise in the open air, or it would be apt to produce other disorders of the system.  
 2. Could you tell me from what books I could best learn the principles of political economy? A. We would recommend John Stuart Mill's "Principles of Political Economy" (\$3.50); "Money and the Mechanism of Exchange," by W. Stanley Jevons (\$1.75); "Physics and Politics," by Walter Bagehot (\$1.50); and a long list of others. The subject is a big one.

(5) C. C. F. desires a receipt for ink to renew a Keystone rubber stamp pad one year in use. A. All inks used on this class of pad are made from aniline colors dissolved in glycerine and thickened with gelatine. When they need renewal, the addition of a little glycerine and alcohol may soften and revivify them, but when exhausted they are intended to be thrown away.

(6) R. L. P. asks: What will dissolve gold chloride? I have about eight or twelve grains dissolved in HCl and HNO<sub>3</sub>; then I precipitated with hydrogen sulphide, and tried to dissolve the precipitate in a half ounce of cyanide of potassium, with no result. I heated the mixture. What is the trouble? A. Before passing hydrogen sulphide through the gold solution, you had the chloride in solution, and you should have added the cyanide to it. You have precipitated sulphide of gold. Dissolve it in nitric and hydrochloric acids as before.

(7) T. B. asks: 1. How many candle power Edison lamp will the dynamo referred to in

161 supply with electricity? A. Five to ten candles.  
 2. What horse power is required to run it? A. About one-sixth horse power.  
 3. How many cells of the Daniell battery, 4 inches diameter and 6 inches high, would supply a four candle lamp? A. Twenty to thirty cells.  
 4. Who manufactures small dynamos? A. Consult our advertising columns.

(8) J. A. M. asks the best thing to clean a locomotive smokestack, and make it look as black and bright as possible. A. Often wipe down with oil and lampblack. A little plumbago makes the good appearance more durable.

(9) W. H. B. desires a reliable cement for fastening metal to glass—one that will resist the action of water and acids, especially acetic acid. A. Finely powdered litharge, fine dry white sand, and plaster of Paris, each 3 parts by measure, finely pulverized resin 1 part. Mix and make into a paste with boiled linseed oil, to which a little drier has been added, and let it stand four or five hours before using. After fifteen hours' standing, it loses strength. This cement is said to have long been successfully used in the Zoological Gardens, London.

(10) R. S. D. asks: 1. What chemicals are used in Robert's permanganate battery? Give formula. A. Permanganate of potash, bichromate of potash, and an alkali chloride. It is described in United States patents numbers 311,852, 311,853, and 317,206, which we can send you for 25 cents each.  
 2. Can cast iron that is a little hard, but not so hard but that it can be readily worked, be softened by annealing so as to be as good for electrical purposes as though it was cast very soft? Will it injure a finished piece if it is covered with air-slaked lime and heated to a white heat? A. The proposed annealing of cast iron would tend to improve it, especially if you heated it hot enough to start with.  
 3. Why is a magnet placed so as to curve around a telephone bell? A. The curved magnet or magnets polarize the armature, so that the intermittent currents passed through the electro-magnets cause it to vibrate.  
 4. Can you furnish working drawings of a larger dynamo of a different style from the one in SUPPLEMENT, No. 161? A. We hope soon to publish an article on such a dynamo.

(11) W. C., Jr., asks: 1. What is the safe working pressure of a boiler 60 inches diameter by 14 feet long, made of wrought iron  $\frac{1}{2}$  inch thick, and one of the sheets exposed to the fire having scaled off  $\frac{1}{2}$  of an inch thickness for a space of 12 inches diameter, longitudinal seams double riveted? I carry 90 pounds pressure; the boilers are eight years old. Number of tubes 51,  $3\frac{1}{2}$  inch. A. If the blister is not disposed to run in deeper, the boiler should still be good for 90 pounds steam pressure. Half inch is very heavy iron for a 60 in. shell; a  $\frac{1}{2}$  in. blister still leaves the iron as thick as most boilers are made of that size. All that is necessary to do is to watch the blister, as it may still spread and become deeper. 2. The best method of preserving this boiler when we do not run but four months in a year. Would you advise me to put lye in the boiler to take scales from tubes while idle? Would it be a good plan to use  $\frac{1}{2}$  ounce crude rock oil in boiler while running to prevent scale? A. Lay up your boiler full of water that has been boiled, after having cleaned it. The boiling discharges the air, when it can be shut tight to keep out air. A little carbonate of soda, say 1 pound, put in when the boiler is filled to lie up, will help loosen the scale during the season of lying up. So small a quantity of crude oil will do no harm, and may facilitate the loosening of the scale. The boiler should be cleaned often when oil is used, as it is apt to gather scale and dirt and form an oil cake, which is dangerous when lodged on a fire sheet. 3. Is not plumbago used with piston packing? A. Plumbago is good on piston packing.

(12) C. R. R.—The plan of connecting a battery of 5 boilers with a cross steam dome riveted to the boilers is not good practice, and is the cause of all your trouble. The unequal expansion and contraction strains the necks, and sets the weakest points to leaking. Any cement that can be put in such a place will only be a temporary contrivance; besides, we cannot see how you could insert the cement without taking the joint apart, which would require a disturbance of all the other joints. We cannot recommend any other plan than riveting and calking, or to change the method of connection for the whole battery, so as to make it elastic enough to meet the requirements of expansion. Iron pipe connections arranged to take up displacement by heat between the boilers are preferable to the dome.

(13) J. H. asks how to grind brass water valves. I have ground them together with flour of emery and oil, but cannot do good work; it leaves the valves full of creases inside and out. A. The flour of emery used should be very fine, and the work finished with ground pumice stone. If the valve seats are not badly cut, emery should not be used at all, only the fine pumice.

(14) T. C. J. asks: What kind of a pyrometer is used for registering about 4,000° of heat, as the highest graduated pyrometer that I have seen is 1,500°? A. There are no pyrometers made for so high temperature. The Wedgewood pyrometers, made of clay, registered to 2,500°, but were not reliable. They were in use in England. Pyrometers of platinum rods inclosed in a plumbago tube are probably the most reliable up to 3,000°.

(15) C. W. C. desires (1) a recipe for a stain to imitate mahogany on white birch wood, that will not raise the grain of the wood. A. A dark mahogany stain is made as follows: Boil half a pound of madder and 2 ounces of logwood chips in 1 gallon of water, and brush well over the wood while hot; when dry, go over the whole with pearlash solution, 2 drachms to the quart. 2. Can you give recipe for making the acid stain? A. In the acid stain you take nitric acid, and dilute with 10 parts of water, and wash the wood with it. 3. Are there any books which give full directions for imitating the different woods? A. We would recommend for your purpose Spon's Workshop Receipts (second series), which we can send you, postpaid, for \$2.00.

(16) A. R. sends samples of tin and sheet iron finished in colors and figured, and asks how the work is done. A. It is a kind of marbling that is effected much in the same manner as the marbling on book edges, and then varnished. The process requires considerable experience and ingenuity in its artistic accomplishment.

(17) J. R. asks: Is there any preparation that will effectually take out ink from paper without discoloring it? A. A solution of oxalic acid, citric acid, and tartaric acid is attended with the least risk, and may be applied upon the paper without fear of damage. Chloride of lime is also used.

(18) W. M. S. asks: In a photographic lens, where do the rays actually cross to reverse the image on the ground glass? A. The rays from the object cross at the optical axis of the lens between the front and back combinations. It is in the vertical plane of the optical axis that the diaphragms are usually placed.

(19) W. H. P. desires a receipt for citrate magnesia. A. The citrate of magnesia sold in drug stores is made as follows: Calcined magnesia (magnesium oxide)  $\frac{1}{2}$  pounds (or carbonate, 2 pounds), powdered tartaric acid  $\frac{1}{2}$  pounds, bicarbonate of sodium 1 pound; dry each article by a gentle heat, then mix them; pass the mixture through a fine sieve in a warm dry room, and keep it in well corked bottles. A few drops of essence of lemon and 3 pounds of finely powdered sugar are generally added to the above quantity. This makes it more agreeable. A small quantity of the bicarbonate of soda is added in powder immediately before corking.

(20) C. N. V. C. asks: 1. In what way and to what extent are cigarettes injurious to smokers, especially to inhalers? A. The injury done by cigarettes is much greater than that from the use of cigars. The difference is caused apparently by the fact that the smoke of the cigars is not allowed to enter the lungs, while that from the cigarettes is inhaled, reaching of course a greatly more extended area as well as more vital part of the mucous membrane.  
 2. A remedy for pimples on the face, also for blackheads. A. See article on Face Worms in SUPPLEMENT, 542, of May 22.  
 3. What is the value of sulphur as a cosmetic wash? A. The value is almost absolutely nothing.

(21) A. E. S. asks: 1. How can I make one of those batteries that workmen use in the streets for blasting? All that I see of the machine is a box, two thumb-screws, and a handle to set it off with. A. What you have seen is probably some form of induction electric machine or of dynamo. See SUPPLEMENT, Nos. 70, 161, 278, 279, 282. 2. Is Atlas powder another name for dynamite? A. It is a brand of dynamite.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequalled facilities for procuring patents everywhere. In addition to our facilities for preparing drawings and specifications quickly, the applicant can rest assured that his case will be filed in the Patent Office without delay. Every application, in which the fees have been paid, is sent usually to the Patent Office the same day the papers are signed at our office, or received by mail, so there is no delay in filing the case—a complaint we often hear from other sources. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., OFFICE SCIENTIFIC AMERICAN, 351 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

June 15, 1886,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Adding machine, P. T. Lindholm.....	343,770
Air moistener, C. W. Monroe.....	343,720
Alarm. See Burglar alarm. Fire alarm.	
Ammonia in ammonia soda manufacture, recovery of, Parnell & Simpson.....	343,675
Ammonia soda process, Parnell & Simpson.....	343,673
Ammonia sulphide to obtain hydrogen sulphide, treating, Parnell & Simpson.....	343,674
Anchor tripper, J. F. Bartlett.....	343,657
Asbestos, vitrified, E. A. Sperry.....	343,651
Atmospheric engine, A. R. Weisz.....	343,875
Axle, car wheel, E. R. Jones.....	343,905
Axle lathe, convertible, N. Harris.....	343,955
Axle, wagon, J. Lucksinger.....	343,772
Bag fastener, J. L. McDonald.....	343,918
Balance, compound spring, E. L. Chamberlayne.....	343,946
Banjo, O. R. Chase.....	343,564
Bar. See Grate bar.	
Barrel heater, McVicar & Glor, Jr.....	343,838
Barrel stand, I. G. Pollard.....	343,920
Bearings, composition of matter to cool and reduce friction in, J. H. Brown.....	343,943
Bed bottoms, machine for making coiled springs for, D. F. Stambaugh.....	343,928
Bed spring, J. A. Kelly.....	343,641
Bedstead, bureau, M. Samuels.....	343,858
Beehive, J. J. McCullar.....	343,916
Beer in kegs, apparatus for supplying carbonic acid gas to, D. Morris et al.....	343,596
Beer or fluid drip, F. C. & H. A. Stober.....	343,741
Beer with carbonic acid gas, process of hopping and preserving, D. Morris et al.....	343,595
Belt for shoe wear, electric, G. A. Wright.....	343,620
Bicycle body, T. J. Strickland.....	343,777
Bicycles, luggage carrier for, J. A. Lamplugh.....	343,909
Blind slat adjuster, G. L. Williams.....	343,881
Blind, window, S. Palmer.....	343,724
Boiler sweeper, W. T. Levi.....	343,769
Boilers, manifold for sectional, N. W. Pratt.....	343,727
Bolt. See Flour bolt.	

Bolt heading machine, C. T. Parry.....	343,843
Boneblack in sugar refineries, apparatus for drying, S. M. Lillie.....	343,666
Boot or shoe, F. P. Woodbury.....	343,747
Boot or shoe jack, H. T. Morse.....	343,964
Boots or shoes, sole for turned, L. E. Moore.....	343,832
Bottle stopper, C. L. Morehouse.....	343,646, 343,647
Box. See Flower box. Folding box. Paper box. Shut-off box. Telegraph box.	
Bracket. See Sink bracket.	
Brake. See Locomotive and car brake. Wagon brake.	
Bridle, L. E. Jandruce.....	343,585
Broom and tool holder, E. Smith.....	343,926
Buckle, A. Shenfield.....	343,735
Buildings, machine for making ridges and valleys for, L. D. Cortright.....	343,700
Bung, O. W. Eisenhart.....	343,574
Burglar alarm, J. Tomney.....	343,868, 343,869
Burglars, safety device for entrances against, H. H. Denick.....	343,894
Burner. See Lamp burner.	
Burnishing hollow articles, machine for, W. E. Hawkins.....	343,766
Burnishing machine, J. H. Hazen.....	343,710
Bustle, extension, P. A. O'Connor.....	343,723
Butter worker and mould, D. B. Woodward.....	343,684
Button, F. I. Myers.....	343,597
Button, lacing, F. M. Piper.....	343,547
Button setting instrument, C. H. Eggleston.....	343,799
Buttons to fabric or leather, stitching shank, W. E. Bennett.....	343,941
Buttons to fabric or other material, machine for stitching, H. H. Cummings et al.....	343,948
Calculator, tabular, F. W. Child.....	343,566
Candle, S. Clarke.....	343,567
Car brake and starter, W. Montgomery.....	343,594
Car coupling, G. J. Ferguson.....	343,806
Car coupling, C. E. Fritts.....	343,707
Car coupling, H. W. Johnstone.....	343,712
Car coupling, G. Keesy.....	343,638
Car coupling, J. C. Mowry.....	343,722
Car coupling, F. H. Stanford.....	343,740
Car starter, H. Kells.....	343,818
Car, stock, B. F. Holmes.....	343,956
Car, stock, J. Jeppesen.....	343,711
Cars, station indicator for, W. W. Currie.....	343,760
Card, sample, E. Drakenfeld.....	343,704
Carpet stretcher, A. Dann.....	343,892
Carpet sweeper, W. J. Drew.....	343,572
Carrier. See Egg carrier.	
Cart, slag, A. Werner.....	343,783
Cartridge loading case, W. H. Murphy.....	343,836
Cartridge loading machine, G. J. Foster.....	343,706
Case. See Cartridge loading case. Thermometer case. Watch case.	
Caster furniture, O. Pederson.....	343,725
Casting ingots, plant for, W. H. Pollett.....	343,954
Casting, mould for, J. Walker.....	343,872
Castings from old steel rails, producing steel, J. J. Vinton.....	343,617
Ceiling, metallic, J. D. Ottiwell.....	343,775
Cellar or window screen, I. Brooke.....	343,697
Cement, manufacturing hydraulic, H. C. & D. Millen.....	343,913
Cement pipe and earthenware, S. D. Castle.....	343,944
Centrifugal machine, A. Waldbaur.....	343,932
Chair. See Piano and office chair. Revolving chair. Reclining chair. Railway switch chair.	
Chair, J. H. McElroy.....	343,965
Chimney top, T. Bridger & Conery.....	343,652
Chimneys, thimble for, C. F. Green.....	343,581
Chopper. See Vegetable chopper.	
Churn, J. M. Davis.....	343,627
Churn, Lines & Long.....	343,771
Churning or mixing machine, R. Morton.....	343,835
Cigar clipper and lighter, F. M. Wirtz.....	343,746
Clasp. See Spring clasp.	
Clinometer, R. Gray.....	343,634
Clock, J. H. Eastman.....	343,629
Clock movement, electric, P. Lange.....	343,376
Clock winding mechanism, Craig & Eastman.....	343,947
Closet. See Water closet.	
Clothes wringer, C. K. Stinson.....	343,970
Coffee pot, R. L. Gore.....	343,812
Collar, horse, W. L. Bailey et al.....	343,748
Collar or cuff, J. G. Jarvis.....	343,903
Copy holder, A. O. Hall.....	343,662
Copy holder, H. H. Wheeler.....	343,935
Corn shock compressor, A. C. Hedden.....	343,814
Cornet, C. G. Conn.....	343,888
Cotton gin, Wheeler & Hall.....	343,984
Coupling. See Car coupling. Thill coupling. Tire coupling.	
Crate, egg preserving, N. A. Wierman.....	343,784
Crate, knockdown, C. P. Lewis.....	343,588
Cultivator, E. E. Whipple.....	343,936
Cutter. See Heel trimming cutter. Printer's lead and rule cutter. Tube cutter.	
Cutlery, attaching handles to, J. Leiter.....	343,665
Dental plate, A. Robinson.....	343,967
Dental engine attachment, S. G. Perry.....	343,845
Die, R. Butterworth.....	343,563
Disinfecting water closets, etc., apparatus for, F. J. Mitchell.....	343,593
Disintegrator and strainer, J. D. Frary.....	343,809
Ditching machine, J. M. Smith.....	343,613
Door check, C. A. Phoenix.....	343,605
Door hanger, L. Terry.....	343,779
Door or blind, H. H. Field.....	343,807
Door or safe lock, M. F. Brown.....	343,794
Door, screen, J. N. Llygner.....	343,667
Draught equalizer, Devereaux & Murphy.....	343,659
Draw bar pin and fastener, C. C. T. Willson.....	343,653
Drawers, support and frame for, A. L. Moore.....	343,774
Dress form, J. D. Richardson.....	343,729
Drier. See Fruit drier.	
Drier, A. Buel.....	343,755
Drier, M. Hecking.....	343,813
Drier, G. & C. N. Meriwether.....	343,773
Drill. See Grain drill.	
Drills, feed mechanism for, M. Schwarzler.....	343,734
Dumping and discharging apparatus, automatic, J. T. Evans.....	343,762
Dyeing cotton fiber, O. Bielschowski.....	343,793
Egg carrier, A. C. Rumble.....	343,968
Electric alarm apparatus, W. C. Smith.....	343,868
Electric cable, S. F. Shelbourne.....	343,676
Electric energy, distribution of, G. & A. Pfaumkuche.....	343,603
Electric machine, dynamo, S. H. Tacy.....	343,930
Electro-magnetic motors, governor for, C. F. Brush.....	343,886
Elevator. See Water elevator.	
Elevator gates, operating, D. Tufts.....	343,631
Engine. See Hydraulic engine. Gas engine. Traction engine.	
Envelope blanks, mechanism for creasing, F. H. Richards.....	343,854
Envelope machine, F. H. Richards.....	343,855, 343,856
Exhibiting device, J. P. Wilson.....	343,882
Eyeglass frame, G. W. Wells.....	343,876
Fabric. See Metal fabric.	

Farm gate, D. I. Cobb..... 343,798  
 Faucet, self-closing, J. C. Miller..... 343,830  
 Feather pompon, P. A. Merian..... 343,592  
 Feeder, steam boiler, T. H. White..... 343,878  
 Fence, electric, D. H. Wilson..... 343,939  
 Fence machine, E. C. Phillips..... 343,904  
 Fifth wheel, J. V. Alexander..... 343,788  
 File box, M. J. Wine (r)..... 10,737  
 Fire alarm, automatic, W. J. Baulieu..... 343,687, 343,691  
 Firearm, magazine, C. J. Ehbets..... 343,800  
 Fireproof compound and articles made from the same, A. G. George..... 343,810  
 Fishing reel, J. Vom Hofe..... 343,752  
 Fishing rods, line guide for, R. Everett..... 343,802  
 Floor, stall, P. Kulme..... 343,821  
 Flour bolt, K. Dougan..... 343,761  
 Flower box, combination, E. Bloomer..... 343,694  
 Flushing tank, A. Rosewater..... 343,853  
 Folding box, J. R. Cole..... 343,757  
 Freezing mixture, F. A. Schwill..... 343,890  
 Fruit drier, W. S. Plummer..... 343,607  
 Fruit pulper, F. W. Bradley..... 343,754  
 Funnel, H. Van Kammen..... 343,871  
 Furnace. See Gas furnace. Hot air furnace.  
 Furnaces, register box for hot air, A. S. Estabrook..... 343,575  
 Gauge. See Ring gauge.  
 Game pin, H. E. Terrell..... 343,867  
 Garment holder and stocking supporter, F. W. Lowe..... 343,824  
 Garment supporter, F. A. Ellery..... 343,630  
 Gas engine, S. Wilcox..... 343,744  
 Gas engine, ammoniacal, P. J. McMahon..... 343,599, 343,600  
 Gas furnace, W. Swindell..... 343,855  
 Gas generator, ammoniacal, P. J. McMahon..... 343,598  
 Gate. See Farm gate.  
 Gearing, B. D. Whitney..... 343,937  
 Generator. See Gas generator.  
 Glass and other material, etching on, J. Locke..... 343,961  
 Glassware, E. D. Libbey..... 343,823  
 Glassware, ornamenting, E. Pollard..... 343,608  
 Governor, W. H. Wheeler..... 343,688  
 Governor, engine, D. P. Davis..... 343,702  
 Grain and middings separator, C. Ripplin..... 343,649  
 Grain binder, W. P. Hale..... 343,709  
 Grain, cleaning, B. D. Crocker..... 343,624  
 Grain cleaning apparatus, B. D. Crocker..... 343,591  
 Grain drill, Kinsler & Gromme..... 343,907  
 Grain separator, Lavinger & Anspaugh..... 343,822  
 Grate bar, N. Ruger..... 343,922  
 Grave stone support, G. N. Miles..... 343,671  
 Grinding and polishing machine, T. C. Root..... 343,650  
 Gun, magazine, P. A. Altmaier..... 343,883  
 Gun, spring, J. G. Baker..... 343,560  
 Hanger. See Door hanger.  
 Harmonica holder, G. A. Morgenthaler..... 343,833  
 Harness, F. L. Henry..... 343,588  
 Harrow, spring, L. A. Manchester..... 343,717  
 Harvester binder, Grout & Oakley..... 343,661  
 Harvester, corn, W. H. Karicofe..... 343,768  
 Hat sweat, J. Schorestone..... 343,924  
 Hay drag, H. Orchard..... 343,601  
 Hay rake, horse, F. Bentel..... 343,693  
 Hay rake, horse, Bentel & Gardner..... 343,692  
 Headlight screen, C. A. Fields..... 343,632  
 Heater. See Barrel heater.  
 Heel nailing machine, G. T. Demary..... 343,703  
 Heel trimming cutter, S. N. Corthell..... 343,758  
 Heels, attaching, F. F. Raymond, 2d..... 343,728  
 Hinge, roller gate, G. N. Crichton..... 343,759  
 Hoe, Pitney & Ash..... 343,606  
 Holder. See Broom and tool holder. Copy holder. Garment holder. Harmonica holder. Sash holder. Spool holder.  
 Hook. See Snap hook.  
 Hoops, fastener for, Meyer & Chambers..... 343,645  
 Horseshoe, W. N. Brewer..... 343,885  
 Hot air furnace, Sims & Hohmeier..... 343,737  
 Hydraulic engine, C. W. Cooper..... 343,599  
 Ice sawing machine, G. Stadtmiller..... 343,739  
 Indicator lock, C. F. Green..... 343,901  
 Induction coil, G. & A. Pfannkuche..... 343,602  
 Inkstand, C. C. Algeo..... 343,686  
 Insoles, frame for the manufacture of, E. Meise..... 343,670  
 Jack. See Boot or shoe jack.  
 Knife sharpener, F. J. Reinhold..... 343,852  
 Knob, bar, D. M. Ireland..... 343,815  
 Lacing bearing, J. C. Wilson..... 343,975  
 Lamp burner, C. E. Tucker..... 343,972  
 Lamp, electric arc, Golitzinsky & Hymashefski..... 343,811  
 Lamp extinguisher, G. Rayner..... 343,851  
 Lamp, retort gas, G. H. Gregory..... 343,708  
 Lanterns, reflector and attachment for, L. F. Betts..... 343,792  
 Laryngoscope, J. Boekel..... 343,696  
 Latch and lock, combined, G. A. Davies..... 343,893  
 Laundering purposes, apparatus for use in, I. Holzmark..... 343,636  
 Lifter. See Transom lifter.  
 Liquid, emptier, J. Gasca..... 343,764  
 Liquids, apparatus for whipping and churning, R. Morton..... 343,634  
 Lock. See Door or safe lock. Indicator lock. Nut lock. Sash lock.  
 Locomotive and car brake, J. Tribe..... 343,680  
 Locomotive boilers, device for washing out, W. D. Robb..... 343,921  
 Loom shuttle, M. F. Field..... 343,577 to 343,579  
 Looms for weaving double pile fabrics, let-off mechanism for, C. Pearson..... 343,648  
 Looms, woft stop motion for, O. A. Sawyer..... 343,732  
 Measure, tailor's, A. Schad..... 343,859  
 Measures, attachment for, O. F. Lagerquist..... 343,908  
 Measuring powders, instrument for, J. J. Stephens..... 343,776  
 Mechanical movement, L. W. Morse..... 343,672  
 Mechanical movement, F. H. Richards..... 343,857  
 Medicated benzoic sulphide compound, C. Fahlerberg..... 343,803  
 Medicine, dyspepsia remedy, B. Farley..... 343,660  
 Metal fabric, I. Kinney..... 343,958  
 Meter. See Water meter.  
 Mill. See Rolling mill.  
 Milling machine, C. H. Phillips..... 343,846  
 Mixing machine, O. R. Chase..... 343,565  
 Mixing, sifting, and cleaning machine, J. & J. A. Baker..... 343,789  
 Mopping and scrubbing device, T. Williams..... 343,938  
 Mowing machine knives, device for sharpening, C. G. Poulson..... 343,726  
 Mowing machines, finger bar for, G. A. Weaver..... 343,618  
 Mowing machines, track cleaner or divider for, F. J. J. Schuett..... 343,925  
 Multiplication of numbers, apparatus for facilitating the, J. V. Charpentier..... 343,796  
 Music boxes, automatic check for, A. Sueur..... 343,778  
 Music leaf turner, C. P. Jones..... 343,663  
 Music leaf turner, Pye & Flint..... 343,966  
 Musical boxes, automatic check for, C. E. Juillerrat..... 343,767  
 Musical instrument, mechanical, H. Burckas..... 343,795  
 Musical instrument, mechanical, M. Gally..... 343,900  
 Napkin ring, S. E. Barney..... 343,688

Nitro-cellulose, making, F. V. Pool..... 343,850  
 Nut lock, L. Unger..... 343,870  
 Nut lock, Vanderwerken & Harrison..... 343,743  
 Oils, coating the inside of vessels for holding, L. E. Bowker..... 343,622  
 Optometer, A. M. A. Fournet..... 343,899  
 Ores, furnace for roasting and chloridizing, L. M. Rumsey..... 343,731  
 Ores, reducing refractory silver and gold bearing, G. T. Lewis..... 343,589  
 Oven, H. F. Bartlett..... 343,562  
 Oven or furnace for heating ingots and blooms, P. Kirk..... 343,820  
 Overflow trap, automatic, P. W. Meehan..... 343,826  
 Packing, piston rod, J. Schinneller..... 343,923  
 Paint compound, fireproof, W. H. Keller..... 343,906  
 Paper box, W. Taylor..... 343,866  
 Paper, machine for waterproofing or sizing, A. Segal..... 343,861  
 Paper stock, machine for grinding, F. Kurtz..... 343,714  
 Pavement, iron, M. Meyer..... 343,718  
 Perforating machine, C. E. Bentley..... 343,752  
 Piano and office chair, C. E. Davis..... 343,626  
 Piano tuning pin, A. Felldin..... 343,805  
 Pianos, double sounding board for, C. Marx..... 343,644  
 Pigeonhole or post office call box, H. R. Towne..... 343,614  
 Pin. See Game pin. Piano tuning pin. Safety pin.  
 Pipe, machine for bending metallic, W. B. Mack..... 343,962  
 Pipe wrench, J. J. Looney..... 343,668  
 Plaiting machine, P. de Mello Souza, Jr..... 343,912  
 Planing and matching machine, W. M. Dwight (r)..... 10,736  
 Planter, corn, F. W. Shellbarger..... 343,611  
 Planter, seed, H. A. Drebert..... 343,571  
 Planter, seed, W. E. Kennedy..... 343,819  
 Plow, Ball & Bender..... 343,561  
 Plow, A. T. Dilley..... 343,950  
 Polishing wheel, W. Baker..... 343,621  
 Pot. See Coffee pot.  
 Printer's lead and rule cutter, P. S. Kellogg..... 343,640  
 Printing and folding machines, sheet conveyer device between, J. H. Stonemetz..... 343,677  
 Pump, G. Melcher..... 343,827  
 Pumps, bucket for chain, A. Wyckoff..... 343,685  
 Pumping apparatus, P. F. Guthrie..... 343,765  
 Punching and shearing machine, G. McDonald..... 343,917  
 Punching machines, feed table for, C. T. Parry..... 343,842  
 Railway, electric, E. M. Bentley..... 343,884  
 Railway signaling apparatus, E. Baumbach..... 343,751  
 Railway switch chair, H. B. Dye..... 343,951  
 Railway system, electric, S. Miller..... 343,719  
 Railways, automatic switch mechanism for, C. Cass..... 343,699  
 Rake. See Hay rake.  
 Ratchet wrench, J. W. Day..... 343,628  
 Rattan, treating, H. Endemann..... 343,952  
 Rattan, treating and bleaching, H. Endemann, 343,896, 343,897  
 Reclining chair, F. D. Wilt..... 343,654  
 Reel. See Fishing reel.  
 Refrigerator, W. A. Walker..... 343,873  
 Revolving chair, C. E. Davis..... 343,625  
 Ring. See Napkin ring.  
 Ring gauge, J. Harwood..... 343,582  
 Rivet setting and button fastening machine, C. M. Platt..... 343,848  
 Roller and pulverizer, combined, H. P. White..... 343,619  
 Rolling mill, J. G. Laurie..... 343,643  
 Roofing plates for buildings, machine for making, L. D. Cortright..... 343,701  
 Saddles, pad for harness, C. A. Sisson..... 343,612  
 Safes, vaults, and chambers, fireproofing for, H. C. Johnson..... 343,637  
 Safety pin, G. W. McGill..... 343,919  
 Sash fastener, G. N. Clemson..... 343,756  
 Sash holder, Diffenderfer & Zerby..... 343,570  
 Sashlock, window, J. Geiser..... 343,580  
 Saw dresser, circular, H. D. Wolcott..... 343,785  
 Saw teeth, device for swaging, Crossman & Buch..... 343,658  
 Saw tooth, S. Kinney..... 343,713  
 Sawing off stumps, machine for, J. Q. Adams..... 343,787  
 Scale, grain weighing and registering, W. M. Perkins..... 343,844  
 Screen. See Headlight screen.  
 Seal, metallic, C. L. Pond..... 343,849  
 Seal press, hand, G. C. Tewksbury..... 343,780  
 Separator. See Grain separator. Grain and middlings separator.  
 Sewing machine, H. H. Cummings et al..... 343,949  
 Sewing machine and work holding frame for stitching the insoles of shoes, combined, F. Meise..... 343,689  
 Sewing machine feed mechanism, R. H. St. John..... 343,929  
 Sewing machine motor attachment, Clayton & Embry..... 343,887  
 Shoe, Dunn & Cain..... 343,573  
 Shoe nailing machine, McCrum & Bruce..... 343,915  
 Shoe stretcher, G. I. Mounce..... 343,914  
 Shut-off box, M. Walker..... 343,933  
 Shutter worker, C. C. Fairman..... 343,705  
 Shutter worker, F. B. Mallory..... 343,716  
 Sink bracket, A. Fowkes..... 343,633  
 Skate fastening, J. W. King..... 343,664  
 Skirt, dress, I. H. Westgate..... 343,974  
 Slicing machine, Koch & Garrett..... 343,587  
 Snap hook, C. B. Bristol..... 343,942  
 Snap hook, C. H. Smith..... 343,862  
 Spikes, machine for making, J. North..... 343,839  
 Spool holder, B. F. Baker..... 343,749  
 Spring. See Bed spring. Thill coupling spring. Vehicle spring.  
 Spring clasp, H. D. Wheatley..... 343,877  
 Square, Upson & Cowles..... 343,616  
 Squib holders, device for making miner's, H. Stride..... 343,864  
 Stamp, hand, S. S. Marden..... 343,825  
 Stand. See Barrel stand.  
 Steam engine, rotary, J. E. Mills..... 343,831  
 Steam trap, J. R. Barry..... 343,690  
 Steering apparatus for vessels, J. I. Thornycroft..... 343,679  
 Stone and marble, manufacture of artificial, L. L. Boblett..... 343,695  
 Stopper. See Bottle stopper.  
 Stove for burning charcoal and cork, L. Cline..... 343,623  
 Stovepipe elbows, machine for making, Evans & Bissett..... 343,631  
 Stove, vapor, Schneider & Trenkamp..... 343,733  
 Suspender attachment, F. Lind, Jr..... 343,715  
 Suspenders, L. Clark..... 343,797  
 Sweat pad attachment, F. Wiggins..... 343,890  
 Tack strips, manufacturing, T. Barrett..... 343,689  
 Tank. See Flushing tank.  
 Telegraph box, signal call, J. E. Smith..... 343,738  
 Telegraph instruments, key for, G. F. Thompson..... 343,742  
 Telegraphy, dynamo, S. D. Field..... 343,953  
 Thermometer case, C. A. Tatum..... 343,673  
 Thill coupling, H. J. Springer..... 343,927  
 Thill coupling, J. H. Weaver..... 343,874  
 Thill coupling spring, F. A. Baker..... 343,750  
 Tire coupling, wagon, H. J. Simon..... 343,736  
 Torch, H. Wellington..... 343,682  
 Trace supporter, T. Meyer..... 343,828  
 Traction engine, J. Leigh..... 343,910

Traction engine, O. Stevens..... 343,969  
 Transom lifter, G. R. Taxis..... 343,931  
 Transom ventilator, J. P. Tierney..... 343,781  
 Trap. See Overflow trap. Steam trap.  
 Traveling bags, fastener for, S. Scheuer..... 343,609  
 Trestle, J. T. Miller..... 343,829  
 Truck, C. G. Conn..... 343,890  
 Truck, hand, J. D. Hill..... 343,635  
 Trunk, I. Straw..... 343,971  
 Truss, W. Caudel..... 343,945  
 Truss, J. R. Jones..... 343,816  
 Tube cutter, C. E. Huntley..... 343,957  
 Tube expander, G. A. Rowell..... 343,730  
 Tubes, manufacture of, J. Hoffman..... 343,584  
 Tug, trace, E. C. J. Troxell..... 343,615  
 Type writing machine, G. W. N. Yost..... 343,655  
 Umbrella runners, fastener for, R. A. Merchant..... 343,963  
 Valve, electro automatic, A. S. Kissell..... 343,642  
 Valve, steam-actuated, J. B. Maas..... 343,911  
 Vase and stand, flower, T. Jewitt..... 343,904  
 Vegetable chopper, J. E. Opp..... 343,840  
 Vehicle spring, J. B. Baynes..... 343,791  
 Vehicles, sleigh attachment for, T. Scott..... 343,610  
 Vehicles, spring clip for, J. H. Wiestner..... 343,879  
 Velocipede, D. G. Biggs..... 343,753  
 Velocipede, E. G. Latta..... 343,959  
 Velocipede saddle, A. H. Overman..... 343,841  
 Velocipede sleigh, F. F. Foster..... 343,898  
 Ventilator. See Transom ventilator.  
 Vermin exterminator, A. A. Griffin..... 343,902  
 Vulcanite from hair, etc., producing solid compounds resembling, O. Lugo..... 343,590  
 Vulcanites and producing the same, O. Lugo..... 343,591  
 Wagon bolster, J. M. McNeese..... 343,837  
 Wagon brake, G. Denny..... 343,895  
 Wagon brake, Keever & Remy..... 343,639  
 Wagon stake, A. Lindell..... 343,960  
 Warping, beaming, and other machines, expansion comb for, T. C. Entwistle..... 343,801  
 Watch case, M. W. Evans..... 343,576  
 Water closet, J. Kelly..... 343,586  
 Water elevating apparatus, C. W. Cooper..... 343,568  
 Water elevator and carrier, Ford & Rarick..... 343,808  
 Water meter, rotary, G. Fajen..... 343,804  
 Waterproof over garment, M. E. Brown..... 343,698  
 Weather strip, W. G. Anderson..... 343,656  
 Weighing and registering machine, automatic grain, R. S. Gabbey..... 343,763  
 Wheel. See Fifth wheel. Polishing wheel.  
 Whiffletree, Judd & Pickens..... 343,817  
 Whip button, Morgan & Becker..... 343,721  
 Whisk or mixer, J. Baker et al..... 343,790  
 Wind instrument, C. G. Conn..... 343,889  
 Windmill, D. B. Wood..... 343,786  
 Wine, treating, A. Wehrle..... 343,973  
 Wrench. See Pipe wrench. Ratchet wrench.  
 Wrench, H. H. Wilson..... 343,940  
 Wringer. See Clothes wringer.

**DESIGNS.**  
 Clock dial, G. W. Bidwell..... 16,733  
 Farm, model of a pioneer, W. Kirkpatrick..... 16,738  
 Grate, cellar, F. A. Peter..... 16,740  
 Knife handle, I. F. Rubel..... 16,741, 16,742  
 Knife handles, ornamentation of, W. N. Kenyon, 16,736, 16,737  
 Sewing machine fixtures, case for, C. M. Currey..... 16,735  
 Sign, Bunnell & Meyer..... 16,734  
 Type, T. MacKellar..... 16,739

**TRADE MARKS.**  
 Accordions, J. F. Kalbe..... 13,889  
 Alloys and metals used for anti-friction purposes, certain metallic, E. A. C. Du Plaine..... 13,388  
 Calf skins, Patzowsky & Co..... 13,420  
 Caps, fur, L. Meyer..... 13,418  
 Cotton goods, Arnold Print Works..... 13,397 to 13,399  
 Cutlery, table, pocket, and other, G. Peters..... 13,400  
 Flour, wheat, J. F. Ferrer..... 13,406 to 13,409  
 Flour, wheat, Sidle, Fletcher, Holmes Company..... 13,402  
 Foundry facings and stove polish, E. D. Ransom..... 13,401  
 Laces for boots, shoes, and corsets, and plain and ornamental braids for binding and trimming fabrics, Fletcher Manufacturing Company..... 13,412  
 Ledgers, day-books, and journals, certain, J. W. Horne..... 13,415  
 Lime, Kerr, Wertzel & Co..... 13,416  
 Liniments, Kerley & Fountain..... 13,417  
 Liquors, compound, H. D. Watts..... 13,423  
 Medicine, blood purifying, H. A. Durrua..... 13,405  
 Mineral fat, W. Ropes & Co..... 13,422  
 Mineral waters, effervescent drinks, ginger ale, ginger nectar, lemonade, etc., Arcadian Mineral Spring Company..... 13,404  
 Musical instruments, wind and string, A. Pollmann..... 13,390  
 Newspapers, magazines, and advertising sheets, H. C. Meyer..... 13,419  
 Packing, engine and pump, R. B. H. Gould..... 13,426  
 Paper, fine writing, S. Worthington..... 13,396, 13,424  
 Pianos, Boardman & Gray..... 13,387  
 Preparations in the form of fluid extracts especially for use in cathartics, F. Stearns & Company..... 13,392  
 Preparations in the form of small pills especially for the treatment of dysentery, F. Stearns & Company..... 13,333  
 Preparations in the form of pellets especially for use as anodynes, F. Stearns & Company..... 13,394  
 Preparations in the form of powders especially for the treatment of fevers, F. Stearns & Company..... 13,395  
 Printing and finishing textile fabrics, machines used in the various processes of, W. Birch..... 13,386  
 Razors and razor strops, Flagg Cutlery Company..... 13,410, 13,411  
 Soap, Adler Bros. & Co..... 13,403  
 Soap, perfume, and cologne, toilet, W. H. Hall, 13,413, 13,414  
 Sporting goods, certain, A. J. Reach & Co..... 13,421  
 Stoves, furnaces, and ranges, Fuller & Warren Company..... 13,425  
 Tobacco, smoking and chewing, Spaulding & Merriek..... 13,391

A printed copy of the specifications and drawing of any patent in the foregoing list, also of any patent issued since 1866, will be furnished from this office for 25 cents. In ordering please state the number and date of the patent desired, and remit to Munn & Co., 361 Broadway, New York. We also furnish copies of patents granted prior to 1866; but at increased cost, as the specifications, not being printed, must be copied by hand.  
 Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, at a cost of \$40 each. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

**Advertisements.**  
 Inside Page, each insertion - - - 75 cents a line.  
 Back Page, each insertion - - - \$1.00 a line.  
 The above are charges per agate line-about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

**GET THE BEST AND CHEAPEST**  
  
**J. A. FAY & CO.**  
 CINCINNATI, O.  
 SOLE AGENTS UNITED STATES.  
 (Cincinnati, Ohio, U. S. A.)  
 Exclusive Agents and Importers for the United States of the

**CELEBRATED PERIN BAND SAW BLADES,**  
 Warranted superior to all others in quality, finish, uniformity of temper, and general durability. One Perin Saw outwears three ordinary saws. Manufacturers of Planing Machines and other Patent Wood Working Machinery.

**SEBASTIAN, MAY & CO'S**  
 Improved Screw Cutting  
**LATHES** Foot & Power \$60.  
 Drill Presses, Chucks, Drills, Dogs, and machinists' and amateurs' outfits. *Lathes on trial.* Catalogues mailed on application  
 165 W. 2d St., Cincinnati, O.

**MINERAL WOOL.**  
 A fire-proof insulator of heat and sound. Samples and price list free. U. S. MINERAL WOOL CO.,  
 22 CORTLANDT STREET, N. Y.

**2d HAND MACHINERY** Lists sent. N. Y. Machinery Depot, Bridge Store No. 16, Frankfort Street, N. Y.


**STAMPED METAL GOODS,**  
 and other Articles in Brass and other Metals (the Dies and Tools for making same). Patent Novelties, Electrical Inventions, Special Machinery, Castings, &c. Manufactured to order by M. A. MARTIN, Manufacturer, P. O. Box 285, New Brunswick, N. J.


**Syracuse Malleable Iron Works**

CATALOGUES FREE TO ANY ADDRESS  
  
**GEARS AND PARTS OF MODELS**  
 GOODNOW & WIGHTMAN BOSTON

**INGERSOLL ROCK DRILL CO.,**  
 10 PARK PLACE, NEW YORK.  
 Improved "Eclipse" ROCK DRILLS,  
 For Mining, Tunneling, Shaft-Sinking, Quarrying, Submarine drilling, and for all kinds of rock excavation.  
 "Straight Line" AIR COMPRESSORS, Boilers, Steam and Horse Power Hoists, Electric Blasting Batteries and General Mining Machinery. Send for full descriptive Catalogue.

**Every Man HIS OWN Printer.**  
 Type setting, etc., easy by printed directions. For business or home use or money making. For old or young. Send 2 stamps for catalogue of presses, type, cards paper etc., to factory.  
**KEELSEY & CO.,**  
 Meriden Conn.

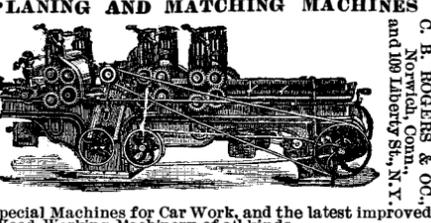**PLANING AND MATCHING MACHINES**  
  
 C. B. ROGERS & CO.,  
 109 Liberty St., N. Y.

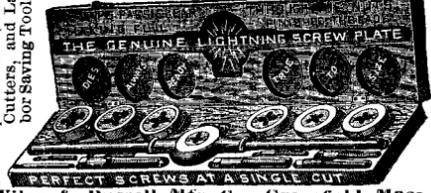**THE GENUINE LIGHTNING SCREW PLATE**  
  
 WILEY & RUSSELL Mfg. Co., Greenfield, Mass.

**POP HAMMERS**  
 Punching Presses  
 Dies and other tools.  
 Siles & Parker Press Co.,  
 214 Centre Street, New York.

**ELECTRIC FANS**  
 To run from 3 to 100 hours, \$10 to \$25. Edison Lamps, Batteries, etc. Send 5 cent stamp for catalogue.  
**THE STOUT-MEADOWCROFT CO.,**  
 84 Fulton Street, N. Y.

**AMERICAN STEAM BOILER INSURANCE CO.,**  
 45 William Street, New York.  
 Write for Special Blanket Form No. 99, gives complete protection to property, and pays \$5,000 for a life and \$50 weekly for six months for injury.

**Edco System**  
 Of Arc and Incandescent Lighting.  
 Electric Light and Power.  
 Motors, Dynamos, Lamps, and Batteries in all varieties. Electro-Dynamic Co., 224 Carter St., Philadelphia.  
**W. W. Griscom, Consulting Electrical Engineer.**

INFORMATION

For Users of Steam Pumps. Van Duzen's Patent Steam Pump... Requires no Packing or Oil... Can pump any kind of liquid...

The only Real Treatise on the Subject. The Windmill as a Prime Mover. Comprehending everything of value relating to Windmills, their Use, Design, Construction, etc.

THE CHEAPEST AND BEST! PHOTO ENGRAVING CO. 67 PARK PLACE, NEW YORK. ENGRAVING FOR ALL ILLUSTRATIVE AND ADVERTISING PURPOSES.

APPLICATIONS, with Testimonials, to fill the Chair of Mechanical Natural Philosophy... Drawing (Free Hand and Mechanical), and Mining Engineering...

CHARTER'S GAS ENGINE. Warranted equal to any in Power and Economy, and Superior to all in Simplicity and Compactness. Engines and Pumps Combined. Williams & Orton Mfg. Co., STERLING, ILLS.

CIVIL, MECHANICAL AND MINING ENGINEERING at the Rensselaer Polytechnic Institute, Troy, N. Y. The oldest engineering school in America.

MODERN BRONZE ALLOYS.—A Paper by P. F. Nyrsey, C.E., presenting some valuable data concerning such bronzes as are being usefully employed for engineering purposes.

THE Caligraph. LIFESHORT-WRITE THE OLD WAY. Address: The American Writing Machine Co., Hartford, Conn.; New York Office, 237 Broadway.

FOREIGN PATENTS. Their Cost Reduced.

The expenses attending the procuring of patents in most foreign countries having been considerably reduced the obstacle of cost is no longer in the way of a large proportion of our inventors patenting their inventions abroad.

CANADA.—The cost of a patent in Canada is even less than the cost of a United States patent, and the former includes the Provinces of Ontario, Quebec, New Brunswick, Nova Scotia, British Columbia, and Manitoba.

The number of our patentees who avail themselves of the cheap and easy method now offered for obtaining patents in Canada is very large, and is steadily increasing.

ENGLAND.—The new English law, which went into force on Jan. 1st, 1885, enables parties to secure patents in Great Britain on very moderate terms. A British patent includes England, Scotland, Wales, Ireland and the Channel Islands.

OTHER COUNTRIES.—Patents are also obtained on very reasonable terms in France, Belgium, Germany, Austria, Russia, Italy, Spain (the latter includes Cuba and all the other Spanish Colonies), Brazil, British India, Australia, and the other British Colonies.

An experience of FORTY years has enabled the publishers of THE SCIENTIFIC AMERICAN to establish competent and trustworthy agencies in all the principal foreign countries, and it has always been their aim to have the business of their clients promptly and properly done and their interests faithfully guarded.

A pamphlet containing a synopsis of the patent laws of all countries, including the cost for each, and other information useful to persons contemplating the procuring of patents abroad, may be had on application to this office.

MUNN & CO., Editors and Proprietors of THE SCIENTIFIC AMERICAN, cordially invite all persons desiring any information relative to patents, or the registry of trade-marks, in this country or abroad, to call at their offices, 361 Broadway.

Address, MUNN & CO., Publishers and Patent Solicitors, 361 Broadway, New York. BRANCH OFFICES: No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.

NEW YORK BELTING AND PACKING CO.

Oldest and Largest Manufacturers in the United States of Vulcanized Rubber Fabrics. RUBBER BELTING, PACKING, AND HOSE, CORRUGATED Mats and Matting, and Stair Treads, &c.

JOHN H. CHEEVER, Treas. New York Belting and Packing Co., JOHN D. CHEEVER, Depty Treas. Warehouse, 15 Park Row, opp. Astor House, N. Y. Branches: 308 Chestnut Street, Phila., 167 and 169 Lake Street, Chicago, and 52 and 54 Summer Street, Boston.

ENGINES AND BOILERS of all sizes. Write for Circular and tell us what you want. B. W. PAYNE & SON, Drawers, 100 E. 11th St., N. Y. Eastern Agents, HILL, CLARKE & CO., Boston, Mass.

SHOEING HORSES.—ABSTRACT OF A paper by Secretary Russell, of the Massachusetts State Board of Agriculture, giving some valuable hints on the proper method of shoeing horses.

Transmission of Power. Suspension Bridges, Tramways, and other applications of WIRE ROPE. Trenton Iron Co. WORKS AND OFFICE, TRENTON, N. J.

WIRE ROPE. Trenton Iron Co. WORKS AND OFFICE, TRENTON, N. J. New York Office—COOPER, HEWITT & Co., 17 Burling Slip. Philadelphia Office—21 North Fourth Street. Chicago Office—146 Lake Street.

PRESERVATION OF TIMBER.—REPORT of the Committee of the American Society of Civil Engineers on the preservation of timber. Presented June 25, 1885.

ICE & REFRIGERATING PIPE COVERINGS. Absolutely Fire Proof. Made entirely of ASBESTOS. CHALMERS-SPENCE CO., FOOT E. 8TH ST., N. Y.

ASBESTOS PIPE COVERINGS. Absolutely Fire Proof. Made entirely of ASBESTOS. CHALMERS-SPENCE CO., FOOT E. 8TH ST., N. Y.

SHIELDS & BROWN. Manufacturers and Sole Proprietors of BRADLEY'S. For BOILERS and STEAM PIPES. Reduces Condensation of Steam. FOR GAS AND WATER PIPES. Prevents Sweating and Freezing.

A New Type Writer. Correspondence for its manufacture limited. This instrument is simple, durable, rapid, and easy; prints letters and figures in upper and lower case; has detachable alphabets which can be exchanged in a few seconds.

New Catalogue of Valuable Papers contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent free of charge to any address. MUNN & CO., 361 Broadway, N. Y.

THERAPEUTICAL EFFECT OF THE Internal Administration of Hot Water in the Treatment of Nervous Diseases.—By Ambrose L. Ranney, M.D. Rules for administration. The effects of the treatment. Theory of the action of hot water.

PROSPECTING MINERAL LANDS A SPECIALTY. CYLINDRICAL SECTIONS OR CORES OBTAINED THE WHOLE DISTANCE BORED. ARTESIAN WELLS BORED ROUND AND STRAIGHT ADMITTING A LARGER PUMP & CASING IN PROPORTION TO SIZE OF HOLE THAN BY ANY OTHER PROCESS.

SCHOOL OF ENGINEERING. Rose Polytechnic Institute, Terre Haute, Indiana. \$26,000 income from endowment. Mechanical, Civil and Electrical Engineering. Drawing and Chemistry. Manufacturing Shops. Send for Catalogue. Address C. A. WAIDLO, Vice President.

SEAMLESS BRASS & COPPER TUBES. SHEET BRASS BRASS WIRE. Mention this paper.

DRAWING INSTRUMENTS. Illustrated catalogue sent on application to Wm. T. COMSTOCK, 6 Astor Place, New York.

STEAM CATAMARAN MAY BARRETT.—Plans and specifications of the catamaran May Barret, a family cruising boat built for use on rivers and lakes.

RAILWAY AND STEAM FITTERS' SUPPLIES. Rue's Little Giant Injector. SCREW JACKS, STURTEVANT BLOWERS, &c. JOHN S. URQUHART, 46 Cortlandt St., N. Y.

Save postage by using Weaver Metal Mailing Boxes and Envelopes. Book Corner Protectors, metal paper covers. For sending merchandise of every description through the U. S. and Foreign mails.

ADDRESS OF PROF. T. H. HUXLEY on resigning the Presidency of the Royal Society, Nov. 30, 1885. Results of the rapid progress of science. Influence on the moral, social and political relations of man.

Machines. J. A. Mans Patent. YORK MFG. CO., York, Pa.

Barnes' Pat. Foot Hand Power MACHINERY, \$15. Contractors and Builders, CabinetMakers and Jobbers in Wood or Metal, who have no steam power, can, by using outfits of these machines, bid lower and save more money than by any other means for doing their work.

POLISHING FELTS. ALFRED DOLGE, MANUFACTURER, NEW YORK. 122 East 13th Street.

PULLEYS. Order from our "Special List." THE JOHN T. NOYE MFG CO., BUFFALO, N. Y.

JOHN W. CAUGHEY ENGRAVING. PITTSBURGH PA. STAMP FOR SPECIMENS. PARTIAL. WE WILL PAY YOU.

TESTS OF CEMENT.—REPORT OF the committee on a uniform test for cement. Cement tests. Fineness, checking or cracking. Tests recommended, mixing, etc., setting, sampling, sieves, moulds, machines, with 3 figures.

MALLEABLE AND FINE GRAY IRON AL SO STEEL CASTINGS FROM SPECIAL PATTERNS. THOMAS DEVLIN & CO. FINISHING. LEHIGHAVE & AMERICAN ST. PHILA.

THE COPYING PAD.—HOW TO MAKE and how to use; with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made; how to apply the written letter to the pad; how to take off copies of the letter.

PERFECT NEWSPAPER FILE. The Koch Patent File, for preserving newspapers, magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of \$1.50 by mail, or \$1.25 at the office of this paper.

INSURANCE CO. HARTFORD CONN. CASH CAPITAL \$4,000,000. LOSSES PAID IN 67 YEARS \$58,750,000. The Largest and Strongest Company. L. J. HENDEE, PRES'T. J. GOODNOW, Sec'y. W. M. B. CLARK, Asst. Sec'y.

MICRO-ORGANISMS OF POTABLE Waters.—A paper by Dr. T. Leone, showing that atmospheric oxygen is not an element necessary for the increase of microbia in potable waters, and that the carbonic acid is the so agent that interferes with the life of these organisms in carbonic acid waters.

WORKSHOP RECEIPTS.

For the use of Manufacturers, Mechanics, and Scientific Amateurs. The best late collection published of such a wide variety of information.

FIRST SERIES.—Bookbinding; Candles; Drawing; Electro-Metallurgy; Engraving; Gliding; Japans; Photography; Pottery; Varnishing, etc. 400 pages, with illustrations. \$2.00

SECOND SERIES.—Industrial Chemistry; Cements and Lutes; Colloids; Essences and Extracts; Dyeing, Staining, and Coloring; Gelatine, Glue, and Size; Inks; Paper and Paper Making; Pigments, Paint, and Painting, etc. \$2.00

THIRD SERIES.—Alloys, Electrics, Enamels and Glazes, Glass, Gold, Iron, and Steel, Lacquers and Lacquering, Lead, Lubricants, Mercury, Nickel, Silver, Tin, Vanadium, Zinc, etc. 480 pages, 183 illustrations. \$2.00

FOURTH SERIES.—Waterproofing; Packing and Storing; Embalming and Preserving; Leather Polishes; Cooling Air and Water; Pumps and Siphons; Dyeing; Distilling; Emulsifying; Evaporating; Filtering; Percolating and Macerating; Electrotyping; Stereotyping; Bookbinding; Straw-plaiting; Musical Instruments; Clock and Watch Mending; Photography, etc. \$2.00

Send for our complete Catalogue of books, free to any address.

In ordering single volumes, be particular to mention the "series" wanted.

Sent postpaid by MUNN & CO., 361 Broadway, New York, on receipt of price.

CHOLERA.—ABSTRACT OF A PAPER by Dr. F. H. Hamilton, presenting the various facts that are absolutely known about Asiatic cholera. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 471. Price 10 cents. To be had at this office and from all newsdealers.

ASBESTOS. MINERS & MANUFACTURERS' The ASBESTOS PACKING CO. NEW YORK. 33 J. OHN ST. BOSTON. 169 CONGRESS ST.

SWIMMING.—DESCRIPTION OF THE method of teaching swimming employed in France; with 6 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 462. Price 10 cents. To be had at this office and from all newsdealers.

Cash or Deed Boxes, 13 sizes. Best Tin Goods. Secured by the "Champion" Keyless Lock. Sample sent on receipt of price. For illus. list, send 2c. stp. to MILLER LOCK CO., Phila., Pa.

DRY AIR REFRIGERATING MACHINE. Description of Hall's improved horizontal dry air refrigerator, designed to deliver about 10,000 cubic feet of cold air per hour, when running at a speed of 100 revolutions per minute, and capable of reducing the temperature of 90° above to 30° below zero.

The Waterhouse System OF ARC LIGHTING. Can be operated on Slow Speed Engines at a minimum Expense of Power, producing a light so Steady and Brilliant that by its finest work can be performed. The objections to Arc Lights for factory lighting entirely overcome. Much more economical than incandescent lights. Send for catalogue. The Waterhouse Electric Mfg. Co., Hartford, Conn.

ESSENTIAL ELEMENTS OF PLANTS.—A paper by Thos. Jamieson, discussing the question whether the reduction in the number of the chemical essentials of plants has reached its final limit, and presenting experiments to show that a further reduction seems demanded. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 524. Price 10 cents. To be had at this office and from all newsdealers.

A PRACTICAL SUCCESS. VAN DUZEN'S PAT. LOOSE PULLEY OILER. Thousands in satisfactory everyday use. Entire reliability and constancy demonstrated in a two years' test by (would be) Eastern skeptics. Economy shown by reasonable prices and perfect performance. Send for our "Catalogue No. 55." VAN DUZEN & TIFT, Cincinnati, O.

CURE FOR DEAF. PECK'S PATENT IMPROVED CUSHIONED EAR DRUMS Perfectly Restore the Hearing, and perform the work of the natural drum. Invisible, comfortable and always in position. All conversation and even whispers heard distinctly. Send for illustrated book with testimonials, FREE. Address or call on F. HISCOX, 853 Broadway, New York. Mention this paper.

NO MORE CATARRH. The Great German Remedy is a positive cure. Free sample package and book for 4 cents in stamps. E. H. MEDICAL CO., East Hampton, Conn.

TO WEAK MEN suffering from the effects of youthful errors, early decay, lost manhood, etc. I will send a valuable treatise (sealed) containing full particulars for home cure, free of charge. Address Prof. F. C. FOWLER, Moodus, Conn. WEAK, UNDEVELOPED PARTS Of the body enlarged and strengthened. Simple, unflattering self-treatment. Full explanation, references, etc., sent sealed free. ERIE MEDICAL CO., BUFFALO, N. Y.


Advertisements.

Inside Page, each insertion --- 75 cents a line. Back Page, each insertion --- \$1.00 a line.

To Business Men.

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal now published.

MUNN & CO., Publishers, 361 Broadway, New York.

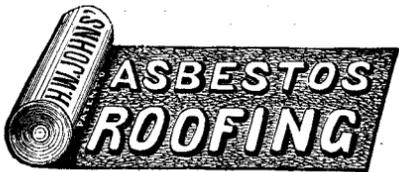

FIRE AND WATER-PROOF BUILDING FELT, FIRE-PROOF PAINTS, STEAM PACKINGS, BOILER COVERINGS, ETC.




Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton, N. J., or 117 Liberty Street, New York.



Horizontal and Vertical. Dredging Machinery, Flour, Powder, Slate and Flint Mill Machinery, Turbine Water Wheels.

LIGHTNING RODS.—DESCRIPTION OF the arrangement adopted by Mr. Melsen for protecting the Brussels Hotel de Ville against lightning.

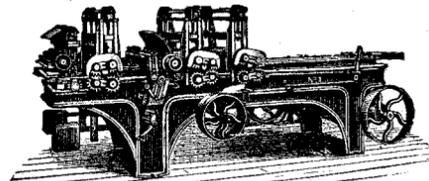

WITHERBY, RUGG & RICHARDSON, Manufacturers of Patent and Working Machinery of every description.



WM. A. HARRIS, Providence, R. I. (Park St.). Six minutes walk West from station. Original and Only Builder of the HARRIS-CORLISS ENGINE.

PATENTS.

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had forty one years' experience, and now have unequalled facilities for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.


We also send, free of charge, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents, 361 Broadway, New York. BRANCH OFFICES.—No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.


THE BRIDGEPORT WOOD FINISHING CO. G. M. BREINIG, AGENT, PRINCIPAL OFFICE AT MANUFACTORY NEW MILFORD, CONN. WHEELERS PATENT WOOD FILLER. BREINIG'S LITHOGEN SILICATE PAINT.

THE IMPROVED Rider Hot Air Pumping Engine For City or Country Residences, Burns Coal, Wood, or Gas. Safe, Simple, Durable. 3,000 in use. Send for Illustrated Catalogue "A."

MACHINERY AND EDUCATION.—A lecture by Dr. R. W. Raymond, pointing out some interesting analogies between the evolution illustrated in the growth of natural forms in the visible world and the development and adaptation of the human mind and thought.

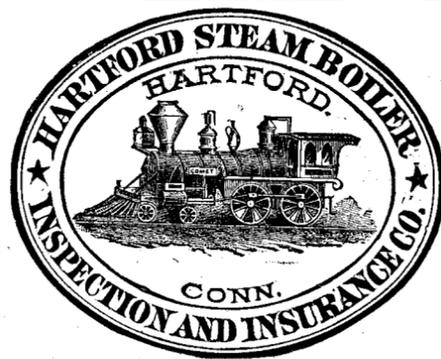

MODEL and EXPERIMENTAL WORK.—A SPECIALTY. Send for Circulars, C. E. Jones & Bro. CINCINNATI, O.



GAS ENGINES.

Best in principle, workmanship, and materials. An unequalled small Motor adapted to all uses. When the motor is not at work, the expense of running it ceases.

ECONOMIC MOTOR CO., Office and Salesrooms, 9 CORTLANDT ST., NEW YORK.


HOISTING ENGINES and Boilers for every possible duty. New catalogue ready. LIDGERWOOD MANUFACTURING CO., 96 LIBERTY STREET, NEW YORK.




Use the JENKINS STANDARD PACKING in the worst joint you have, and if, after following directions, it is not what we claim, WE WILL REFUND THE MONEY.

JENKINS BROS., 71 John Street, N. Y. 79 Kilby Street, Boston. 13 So. Fourth Street, Phila.

SAWS Wanted 50,000 Sawyers and Lumbermen to send us their Book of SAWS. We are first to introduce NATURAL GAS for heating and tempering SAWS.

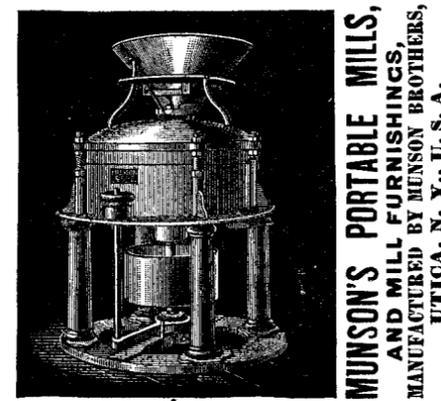

MUNSON'S PORTABLE MILLS, AND MILL FURNISHINGS, MANUFACTURED BY MUNSON BROTHERS, UTICA, N. Y., U. S. A.

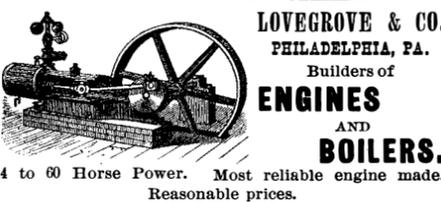

LOVEGROVE & CO. PHILADELPHIA, PA. Builders of ENGINES AND BOILERS. 4 to 60 Horse Power. Most reliable engine made. Reasonable prices.

HYDRAULIC FLANGED HEADS, OF IRON OR STEEL, FOR BOILER AND TANK MAKERS. Unequaled for Strength and Uniformity. THE DICKSON MANUFACTURING CO. SCRANTON, PA.

EPPS'S GRATEFUL-COMFORTING. COCOA



AQUA PURA

BY NATURE'S PROCESSES Turbid Water Made Clean. Matter in Suspension and ORGANIC and Semi-Soluble Elements removed. Hard Water Made Soft.

THE HYANT FILTER

NEWAREK FILTERING CO., NEWARK, N. J. TRIBUNE BUILDING, NEW YORK.

NOVELTY ELECTRIC CO. Manufacturers of Metal and Wood Push Buttons, Burglar Alarm Springs, Bells, Gas Lighting Supplies, &c. THE AMERICAN BELL TELEPHONE CO. 95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

TELESCOPES Spectacles, Barometers, Thermometers, Photographic Outfits for Amateurs, Opera Glasses, Microscopes. W. H. WALMSLEY & CO., successors to R. & J. Beck, Philadelphia.

ELECTRIC CONVEYORS.—DESCRIPTION of two ingenious systems for the electric carriage of small packages. Illustrated with 13 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 464. Price 10 cents.



OF THE Scientific American FOR 1886.

The Most Popular Scientific Paper in the World. Only \$3.00 a Year, including Postage. Weekly 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for one year—52 numbers—postage prepaid, to any subscriber in the United States or Canada, on receipt of three dollars by the publishers; six months, \$1.50; three months, \$1.00.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk.

MUNN & CO., 361 Broadway New York.

THE Scientific American Supplement.

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archeology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc.

Price for the SUPPLEMENT for the United States and Canada, \$5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for \$7.00. Address and remit by postal order, express money order, or check.

MUNN & Co., 361 Broadway, N. Y., Publishers SCIENTIFIC AMERICAN.

To Foreign Subscribers.—Under the facilities of the Postal Union, the SCIENTIFIC AMERICAN is now sent by post direct from New York, with regularity, to subscribers in Great Britain, India, Australia, and all other British colonies; to France, Austria, Belgium, Germany, Russia, and all other European States; Japan, Brazil, Mexico, and all States of Central and South America.

PRINTING INKS.

THE "Scientific American" is printed with CHAS. T. NEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Phila., and 47 Rose St., opp. Duane St., N. Y.